
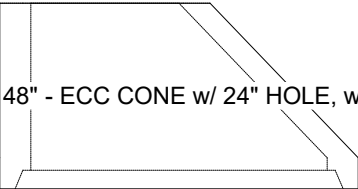


P4) 24" - CASTING HEIGHT - 6"	0 lb	Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. JBS 1155 "SANITARY" BY ICAST 4. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .24) - FLOOR (As .47) #5 BARS AT 8" C.C.E.W.
P3) 48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red - 30"	1961 lb	
P2) 48" - MH RISER w/ConBlock-CDA Red - 60"	4192 lb	
P1) 48" - MH BASE w/ConBlock-CDA Red - 18"	2492 lb	
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)	0 lb	
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212	0 lb	
1) 48" - MH INVERT CHANNEL w/ConBlock-CDA Red - FULL HEIGHT	1440 lb	
1) CASTING - JBS 1155 F/C SANITARY	250 lb	
2) 48" - Conseal CS-102 1.00" (Double)	0 lb	
2) PSX - 12M NYLO	16 lb	
9) MH Step ML-10-TDS-NCR - 10"	0 lb	
Structure Total:		10351 lb

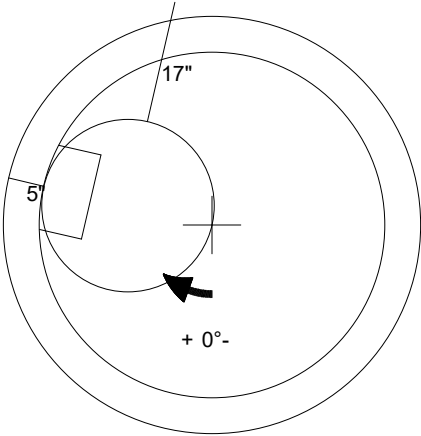

48" - ECC CONE w/ 24" HOLE, w/ConBlock-CDA Red - 30" - (P3)

Coating (Int):	Seam Up: Flat	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 1961 lb
Coating (Ext):	Seam Dn: Groove			Volume (Net): 0.5cu.yd