

**Structure ID: DBI10**

**P2 MH048RS48**

**MH RISER T/G**


P4) 24" x 30" - CASTING HEIGHT - 4" P3) 48" - MH FLAT TOP w/24"x30" Hole F/G - 12" P2) 48" - MH RISER T/G - 48" P1) 48" - MH BASE T/n - 54" 1) CASTING - HOE KY-460-11 F/G (DBI 11) 2) 48" - Conseal CS-102 1.00" 1) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 30 8) MH Step ML-10-TDS-NCR - 10"	0 lb 1935 lb 3353 lb 4787 lb 421 lb 0 lb 0 lb 0 lb 0 lb ----- 10496 lb	<b>Structure Notes:</b> PLAN LABEL: DBI 10 1. PER ASTM C-478 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: - FLAT LID: #4 BAR @ 10" C.C. E.W. (GRADE 60) - BASE & RISER: PER ASTM A615 4. STEPS AT 135 DEGREES 5. KY 460 FRAME & GRATE SUPPLIED BY ICAST
---	--	--

Structure Total: 10496 lb


Rim: 583.67'    Rim to Invert: 9.87'    Slack: 2.44"    Sump: 2"    Step Position: 135°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (L)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


**RIGHT-SIDE UP VIEW (int. dimensions)**

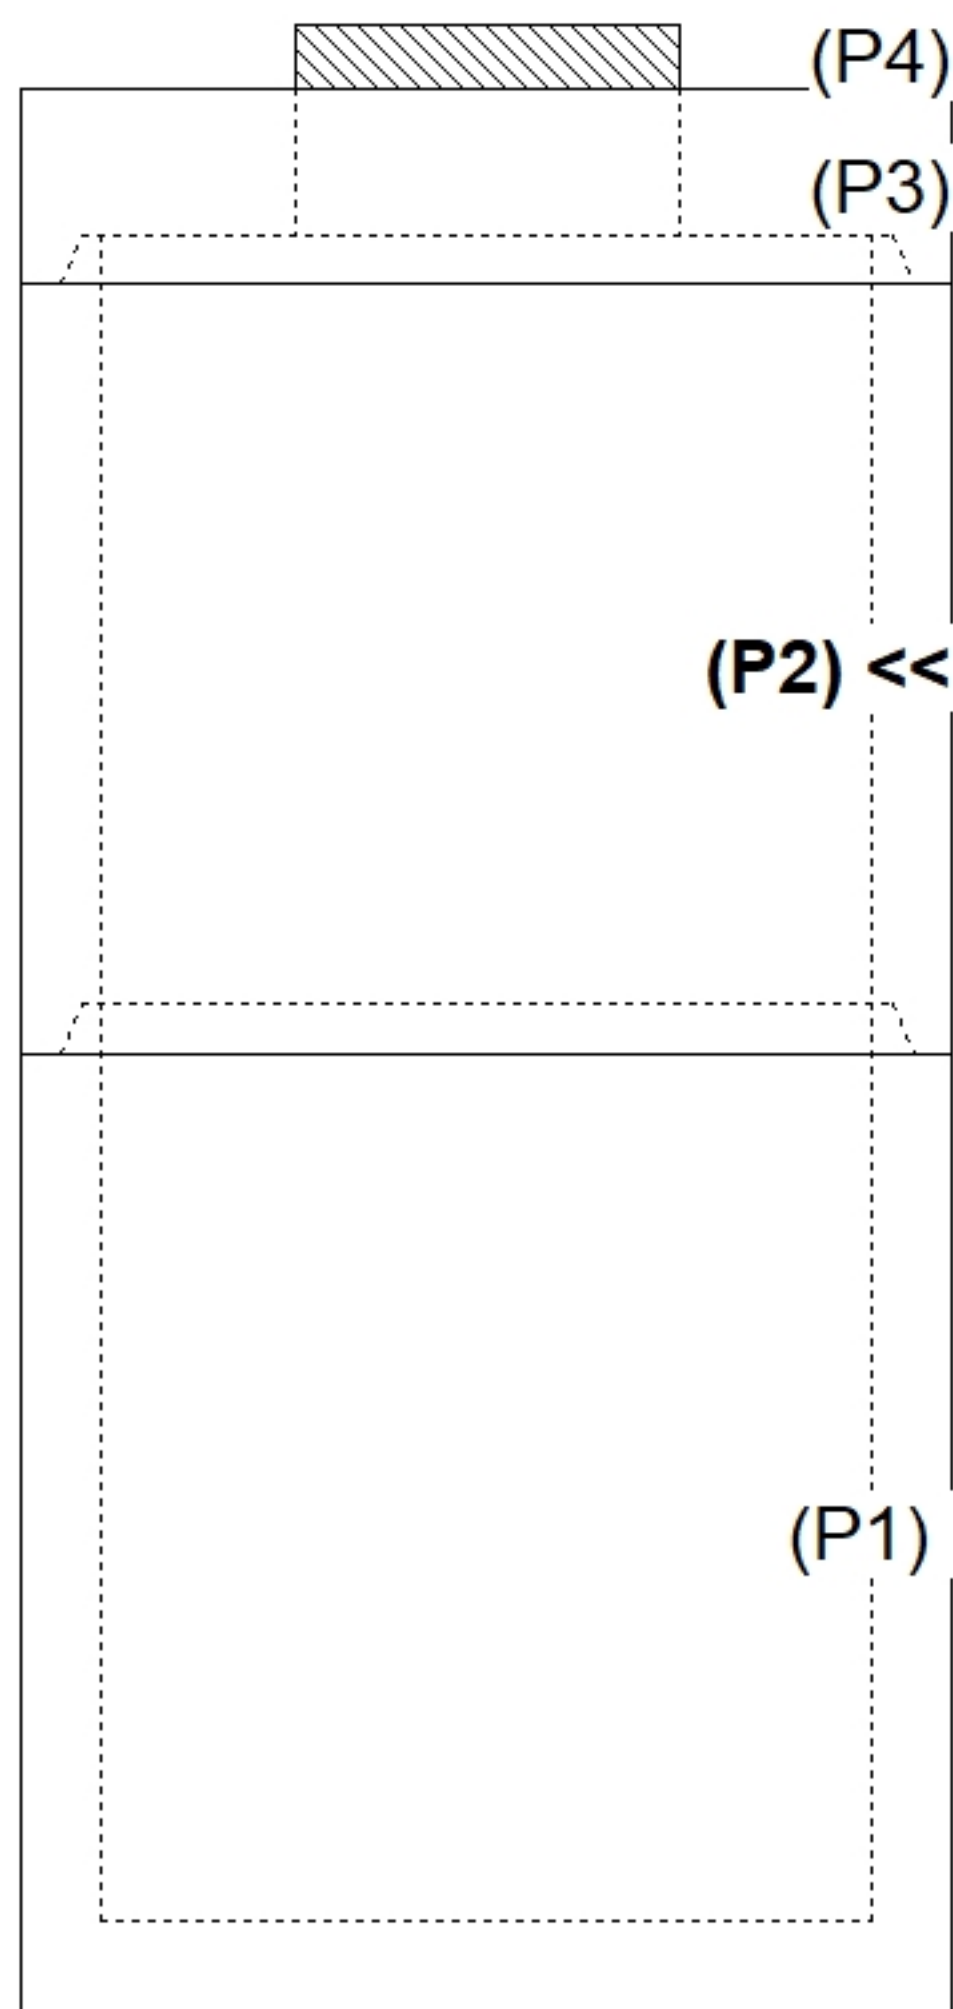

Step: 135°  
Horz: 56.5"

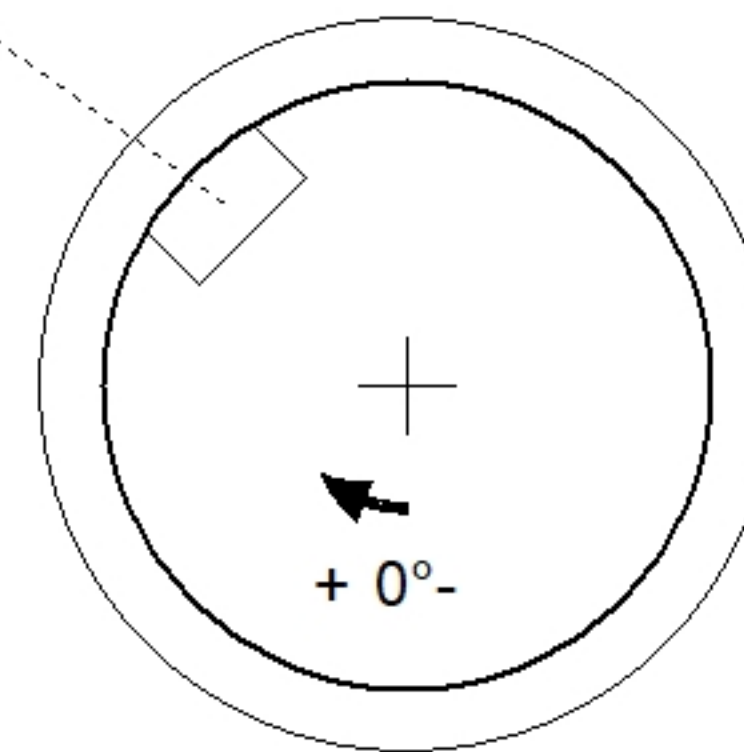

**INSIDE WALL DIMENSIONS**

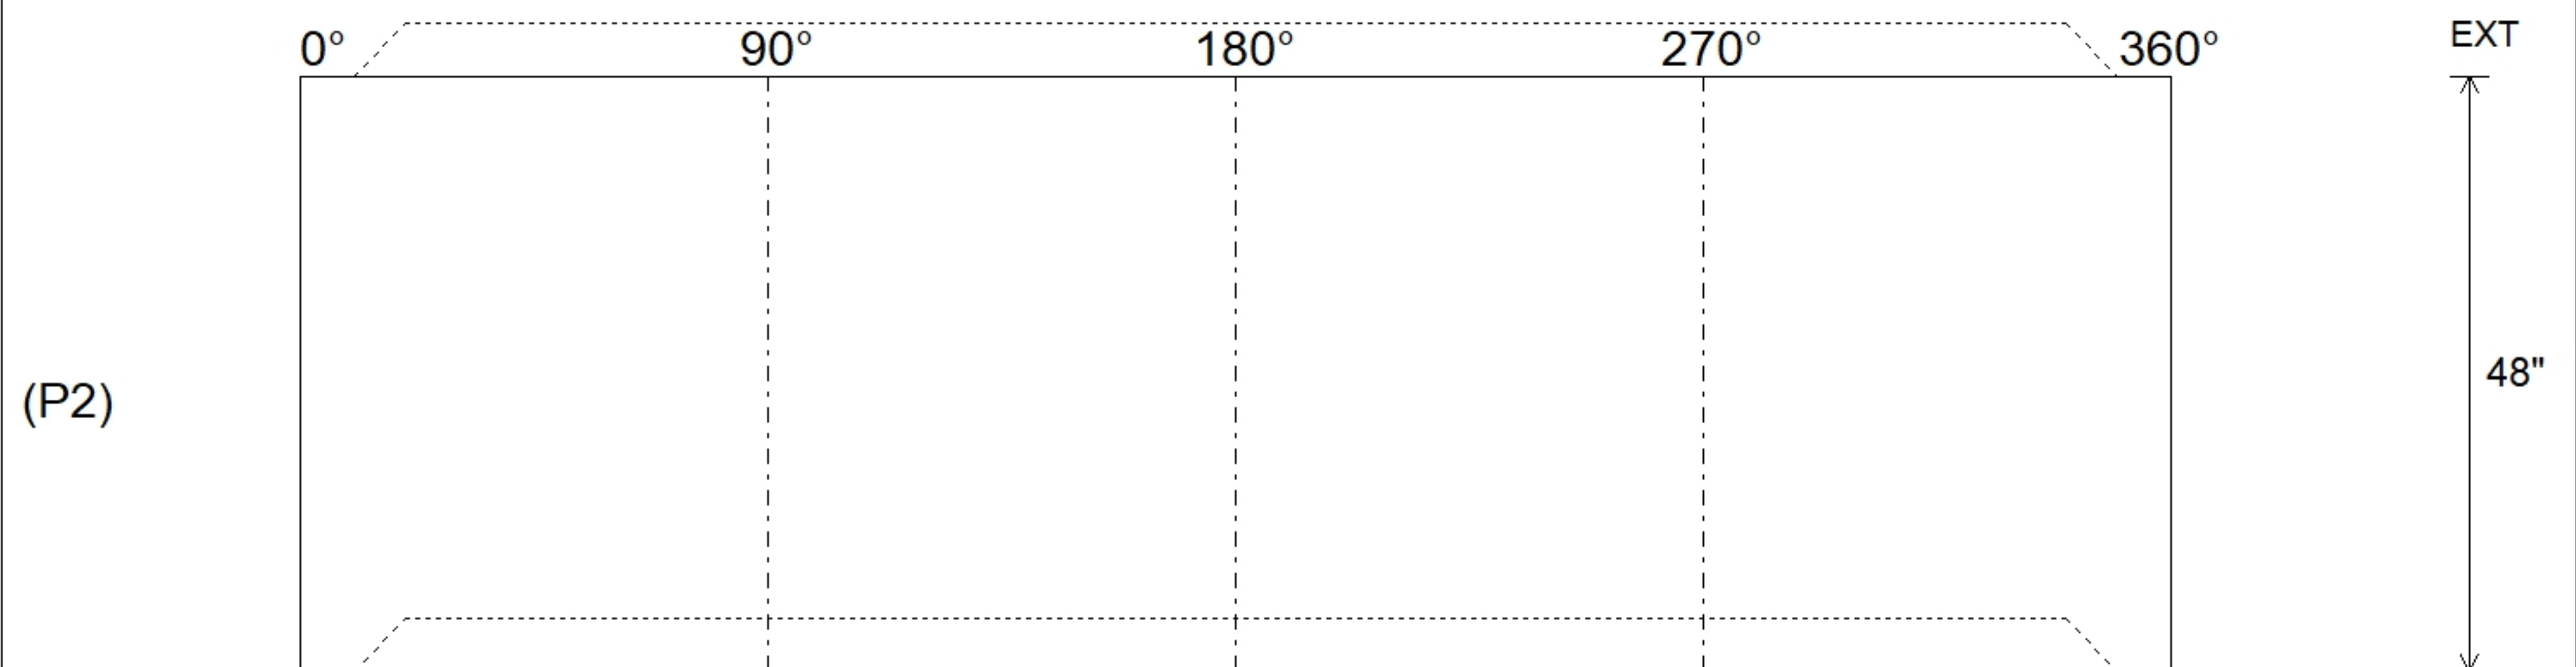

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 48" Height (Ext): 48"	Weight (Net): 3353 lb Volume (Net): 0.86cu.yd
----------------------------------	------------------------------------	--	--	--