

Structure ID: DBI8

P1 BX24300808VF

BOX BASE 8inW, 8inF, Variable Ht F/n

P2) 24" x 30" - CASTING HEIGHT - 4" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht F/n - 35" 1) CASTING - HOE KY-460-11 F/G (DBI 11) 1) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 24 1) Hole - 20	0 lb 4086 lb 421 lb 0 lb 0 lb 0 lb ----- Structure Total: 4507 lb
---	--




Structure Notes:
 PLAN LABEL: DBI 8
 1. PER ASTM C-913 SPECS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60)
 4. KY 460 FRAME & GRATE SUPPLIED BY ICAST

Rim: 576.97' Rim to Invert: 3.33' Slack: 0.96" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	573.64'	0°	20"	18" ADS N-12	22"	Hole 24	24"	24"	-2"	0"
Invert 2	573.64'	180°	20"	15" ADS N-12	18"	Hole 20	20"	20"	-1.5"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

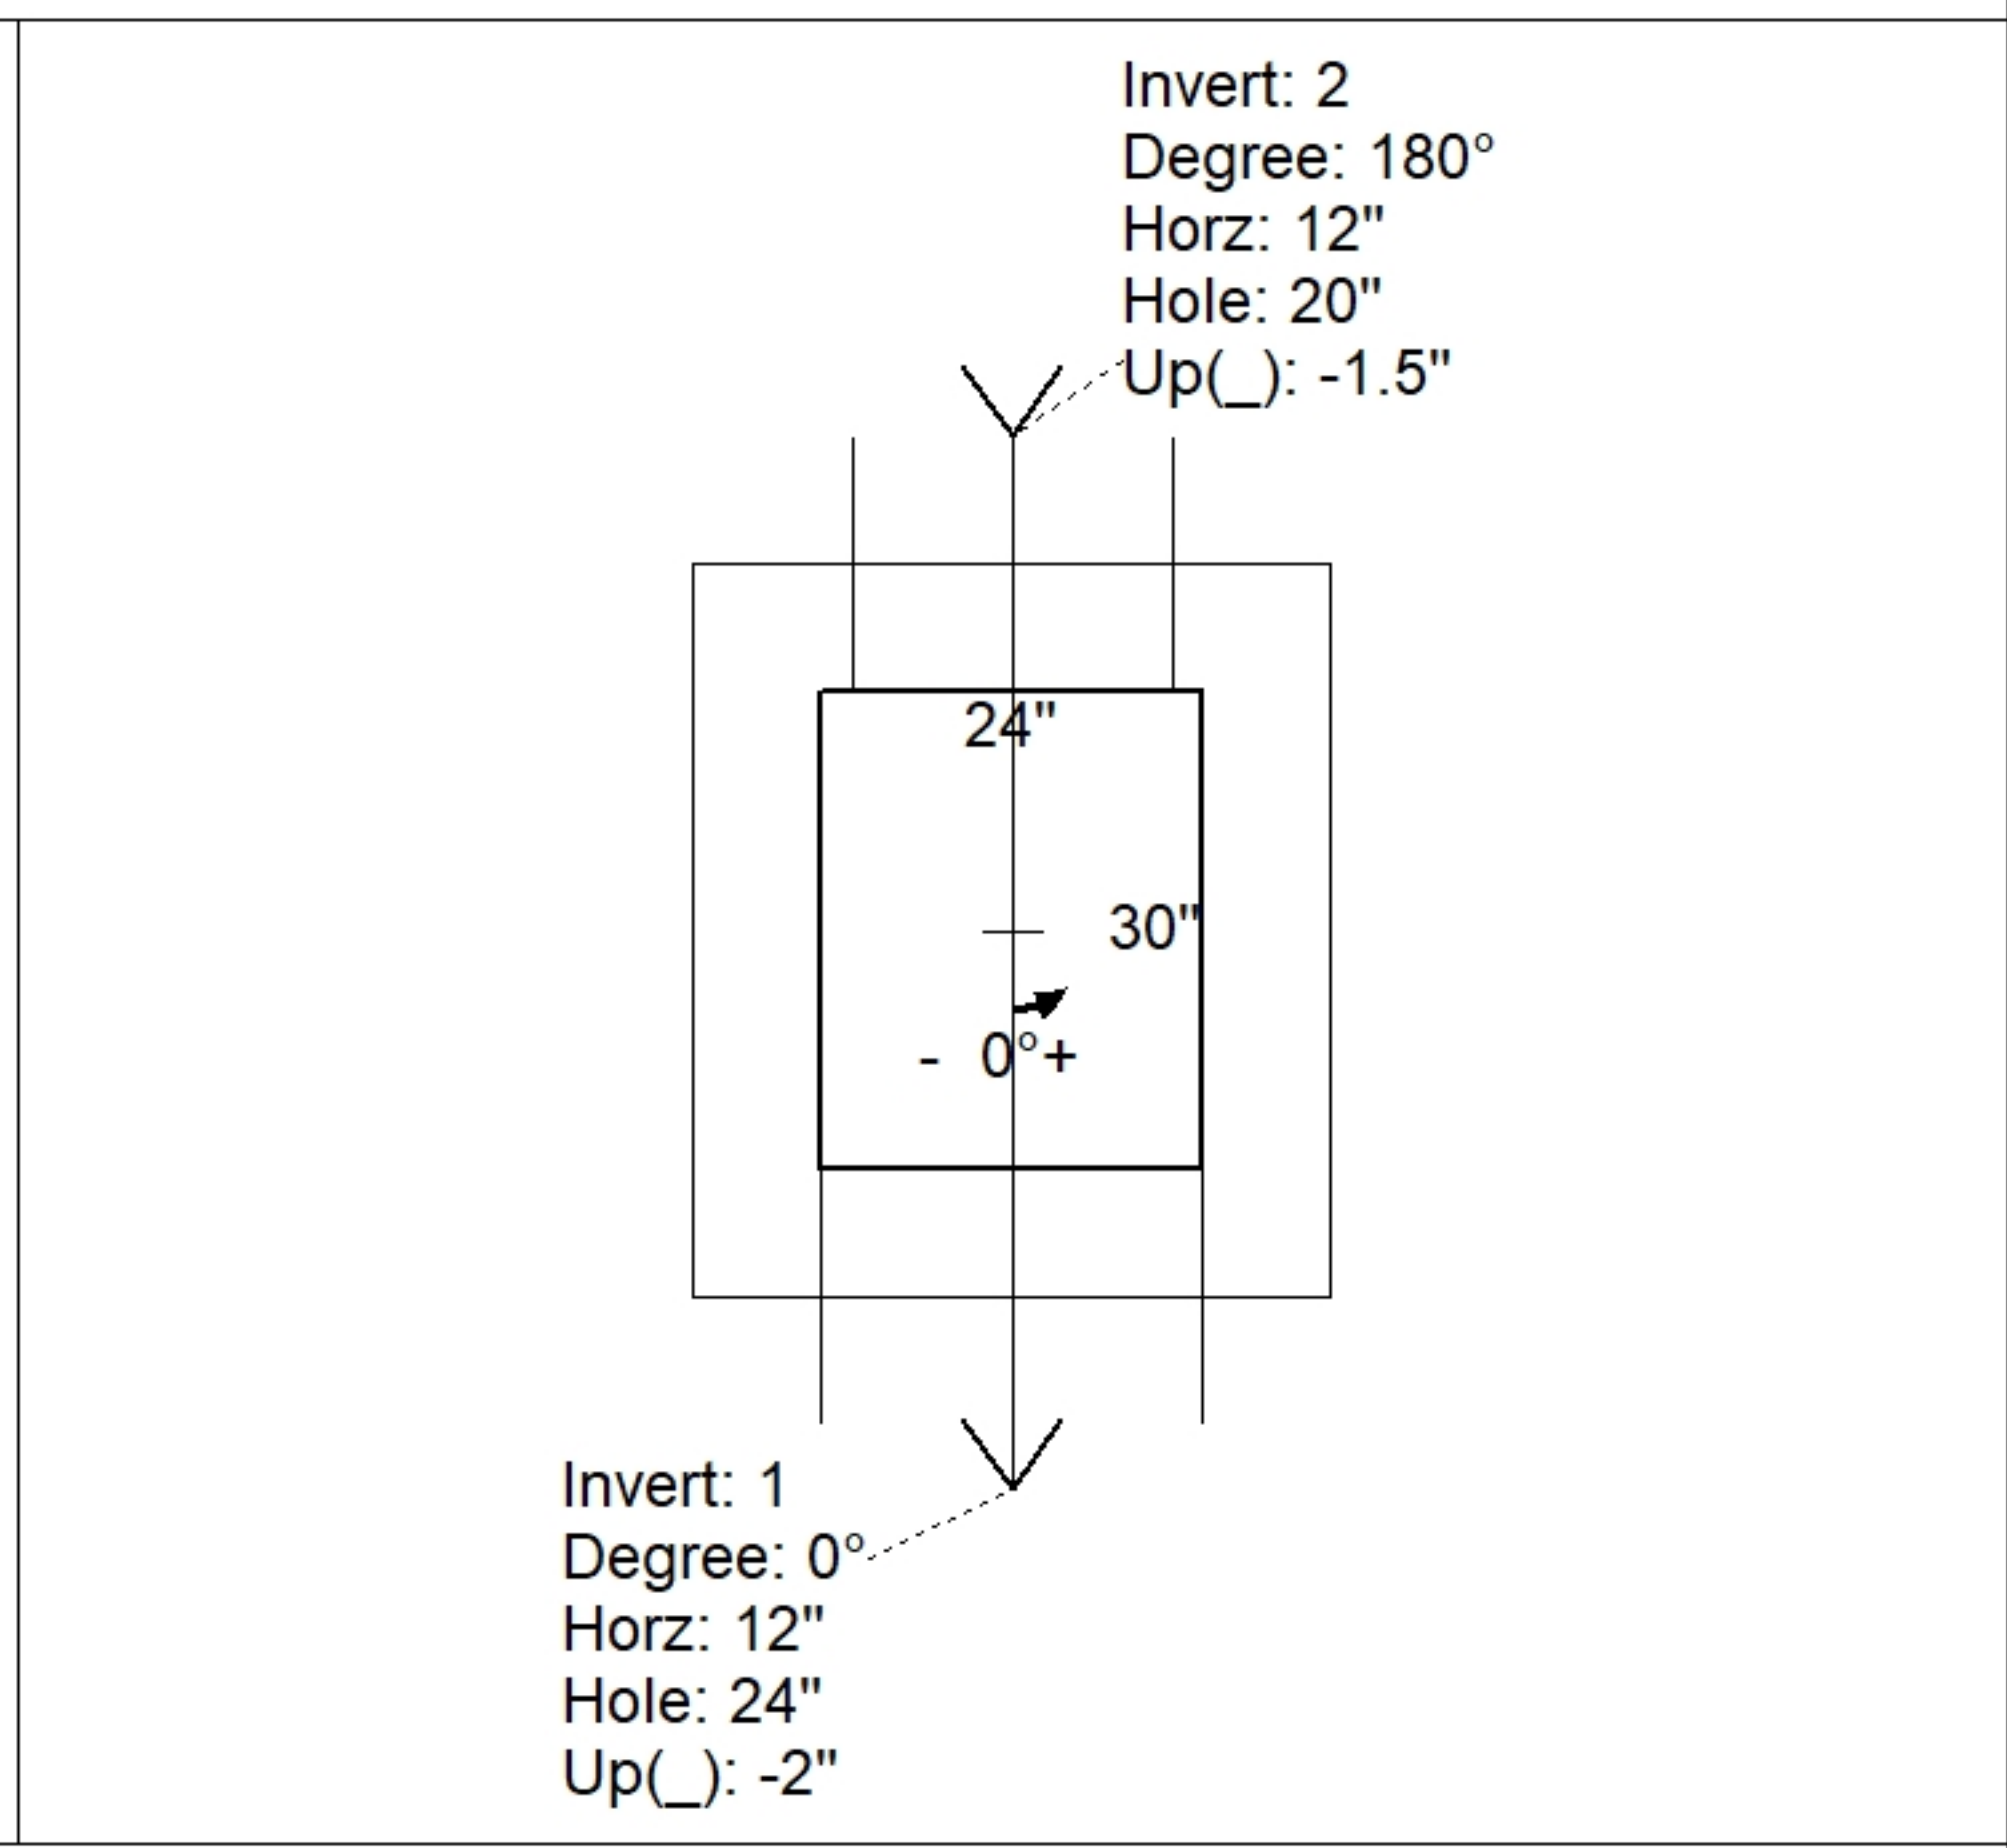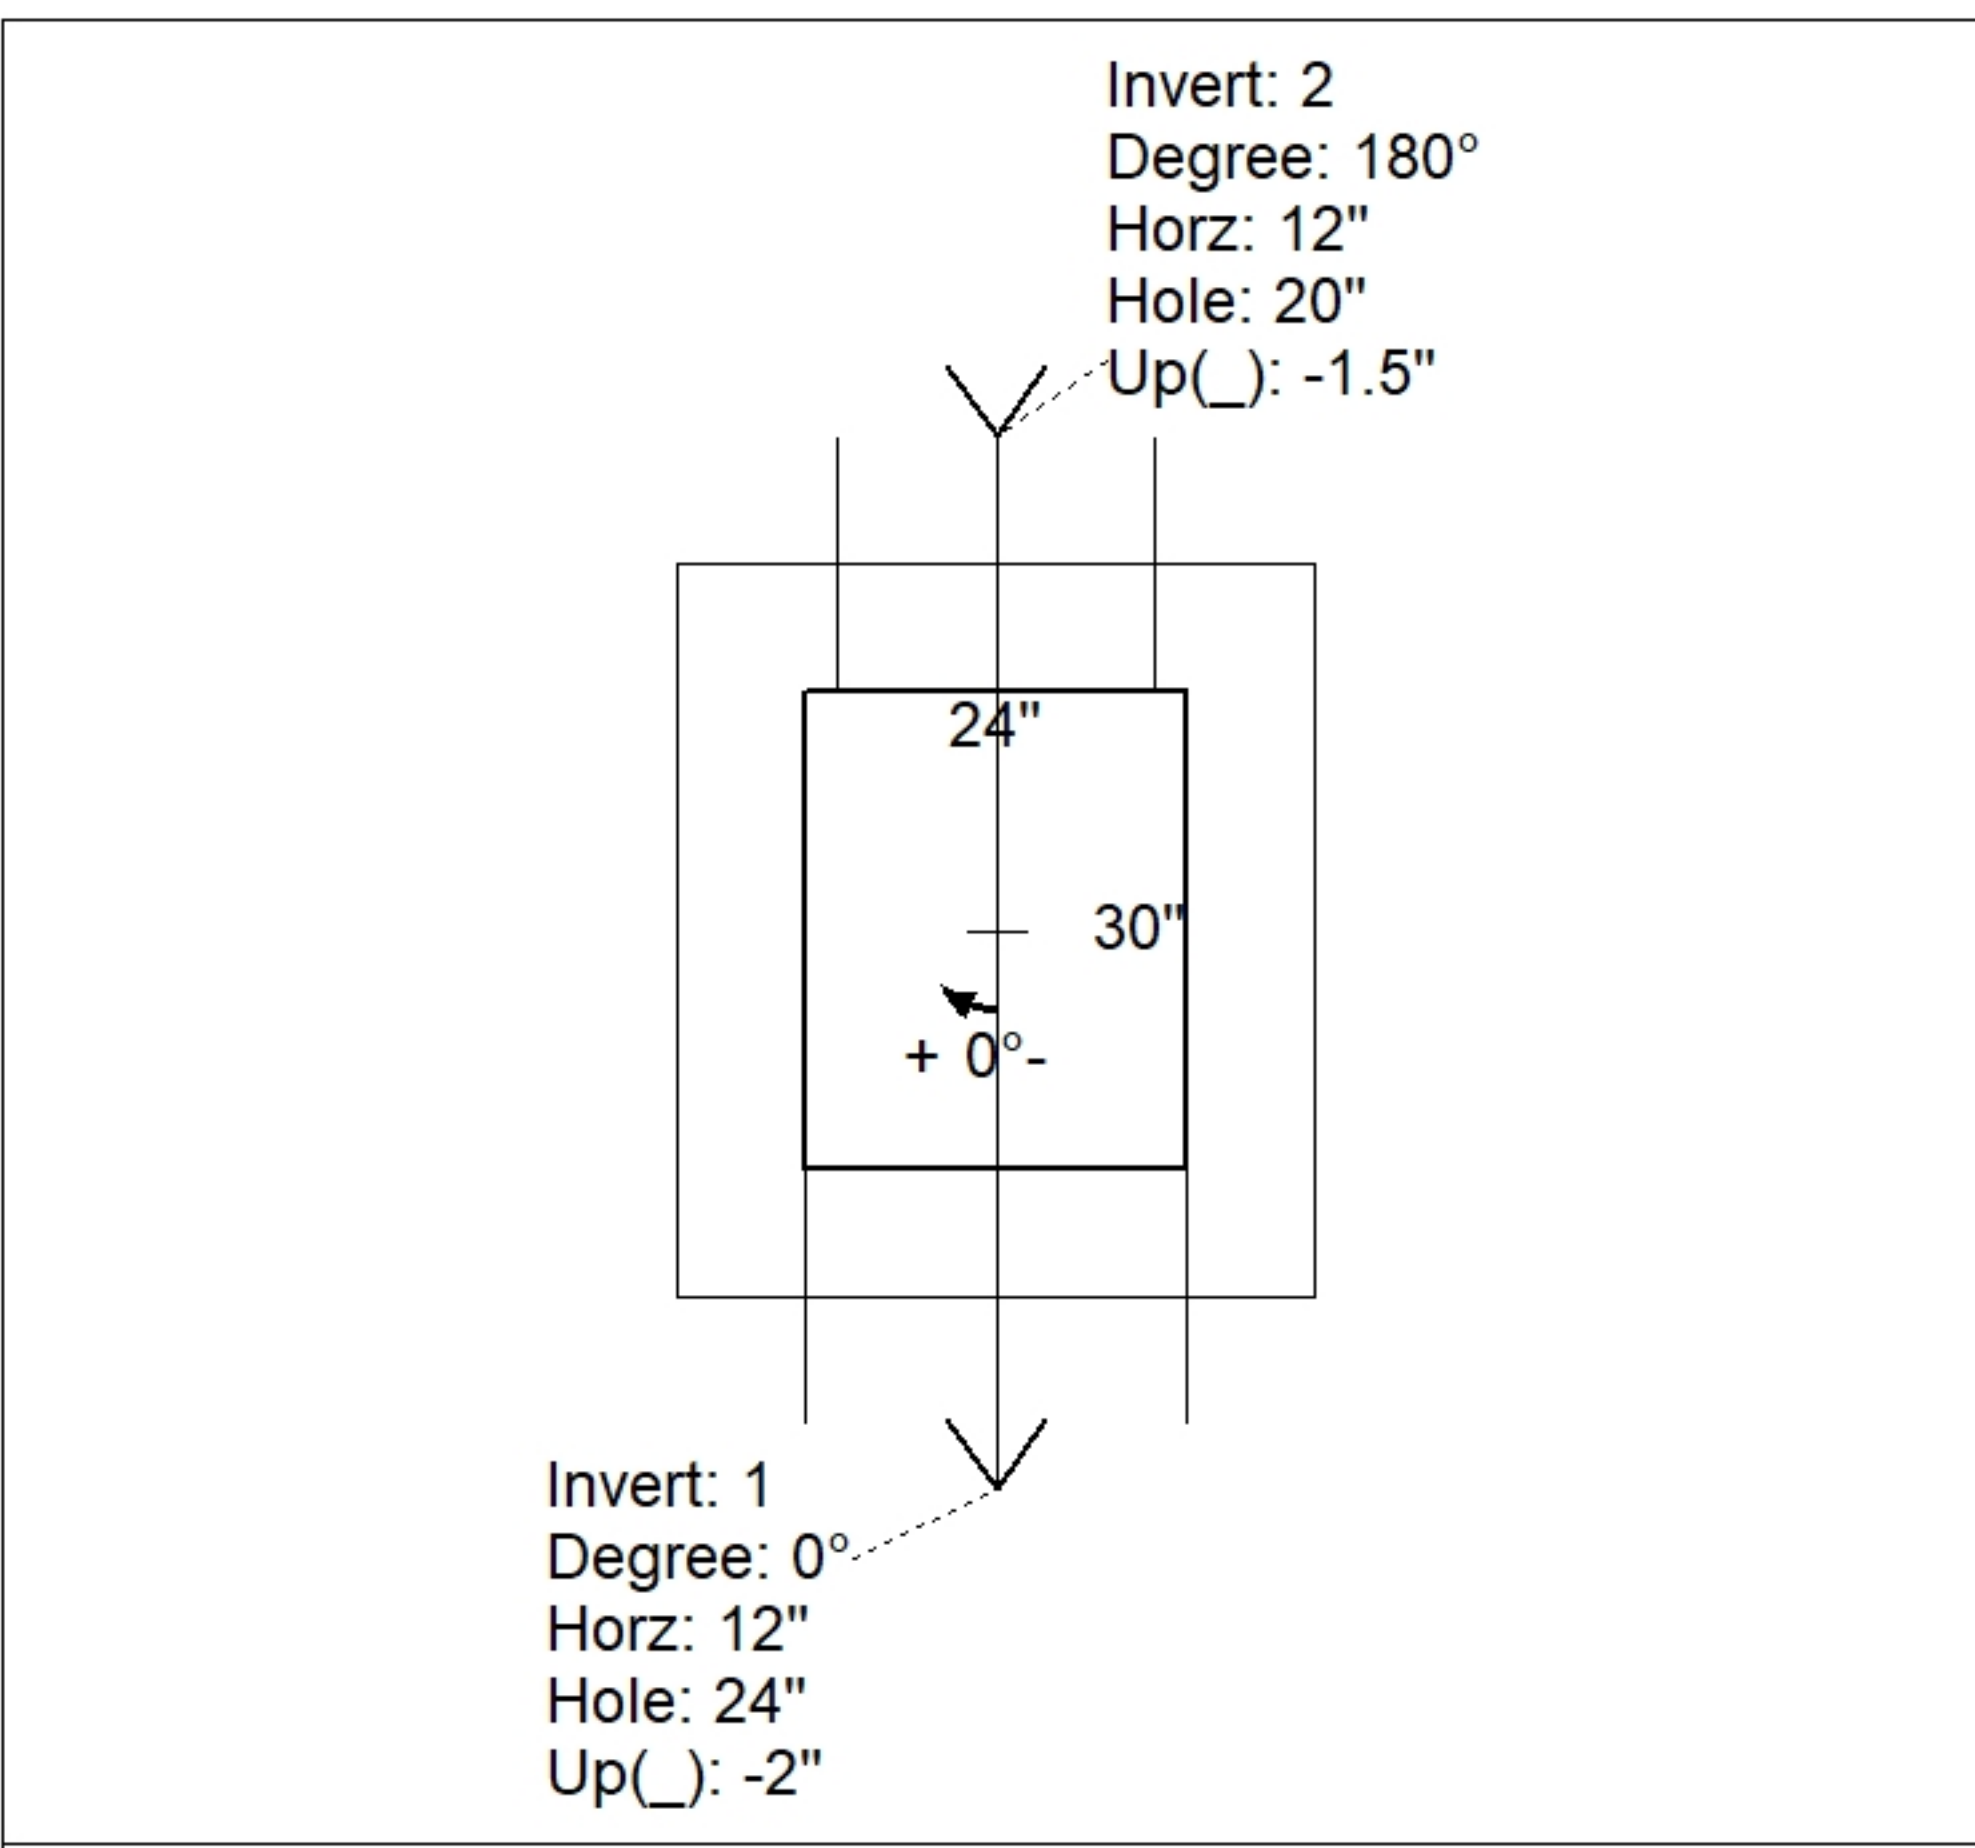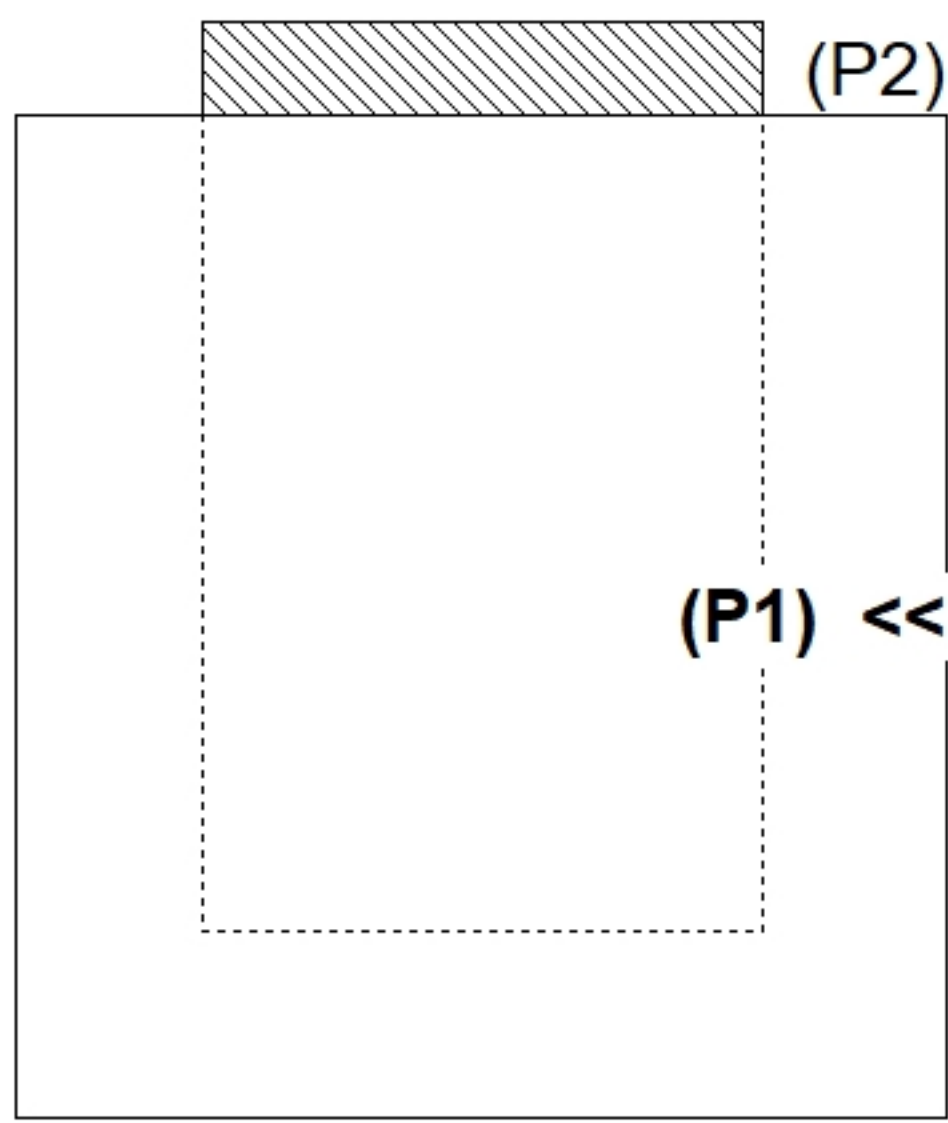

INSIDE WALL DIMENSIONS

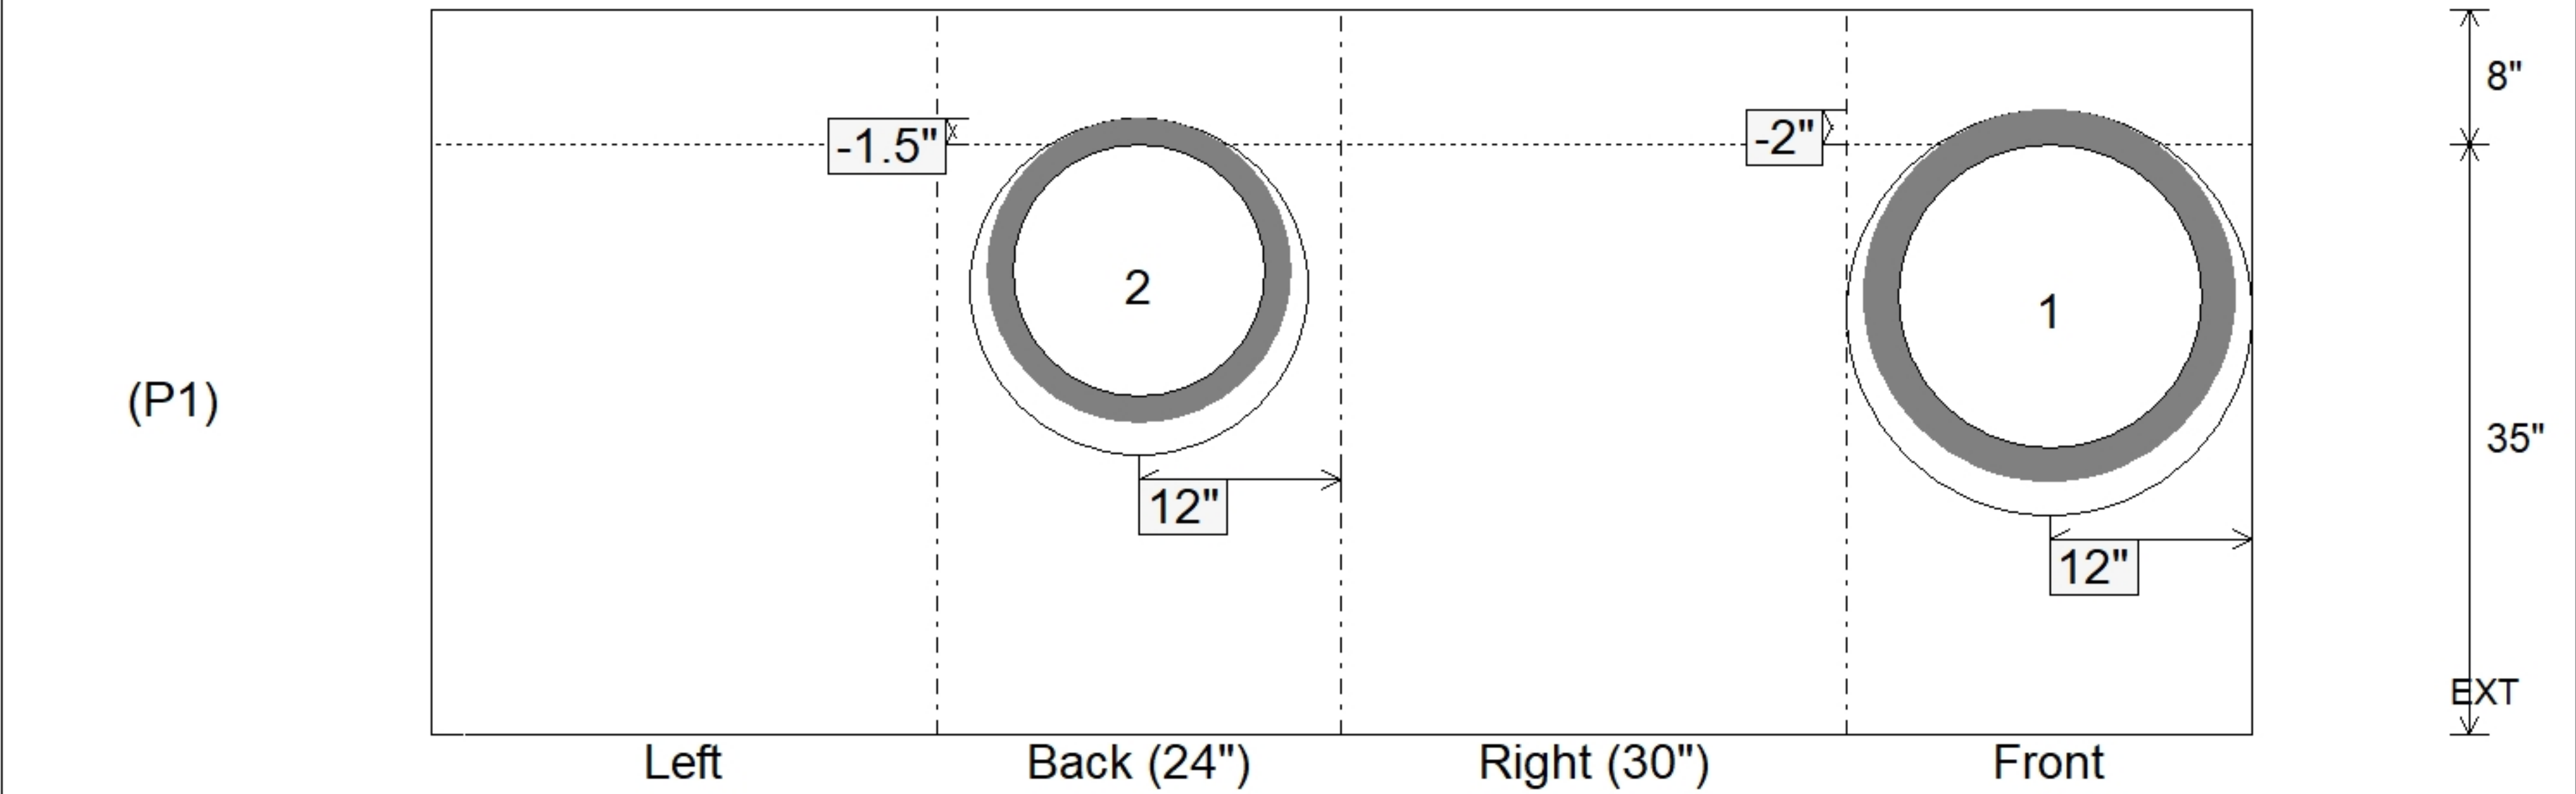

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 35" Height (Ext): 43"	Weight (Net): 4086 lb Volume (Net): 1.04cu.yd
----------------------------------	-------------------------------	--	--	--