

Structure ID: DBI9

P1 BX24300808VF

BOX BASE 8inW, 8inF, Variable Ht F/n

- P2) 24" x 30" - CASTING HEIGHT - 4" 0 lb
 - P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht F/n - 22" 3059 lb
 - 1) CASTING - HOE KY-460-11 F/G (DBI 11) 421 lb
 - 1) 24" x 30" - Conseal CS-102 1.00" 0 lb
 - 1) Hole - 20 0 lb
- Structure Total: 3480 lb




Structure Notes:
 PLAN LABEL: DBI 9
 1. PER ASTM C-913 SPECS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60)
 4. KY 460 FRAME & GRATE SUPPLIED BY ICAST

Rim: 576.44' Rim to Invert: 2.24' Slack: 0.88" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (⌋)	Offset
Invert 1	574.2'	30°	24.625"	15" ADS N-12	18"	Hole 20	20"	23.094"	-1.5"	-7.5"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

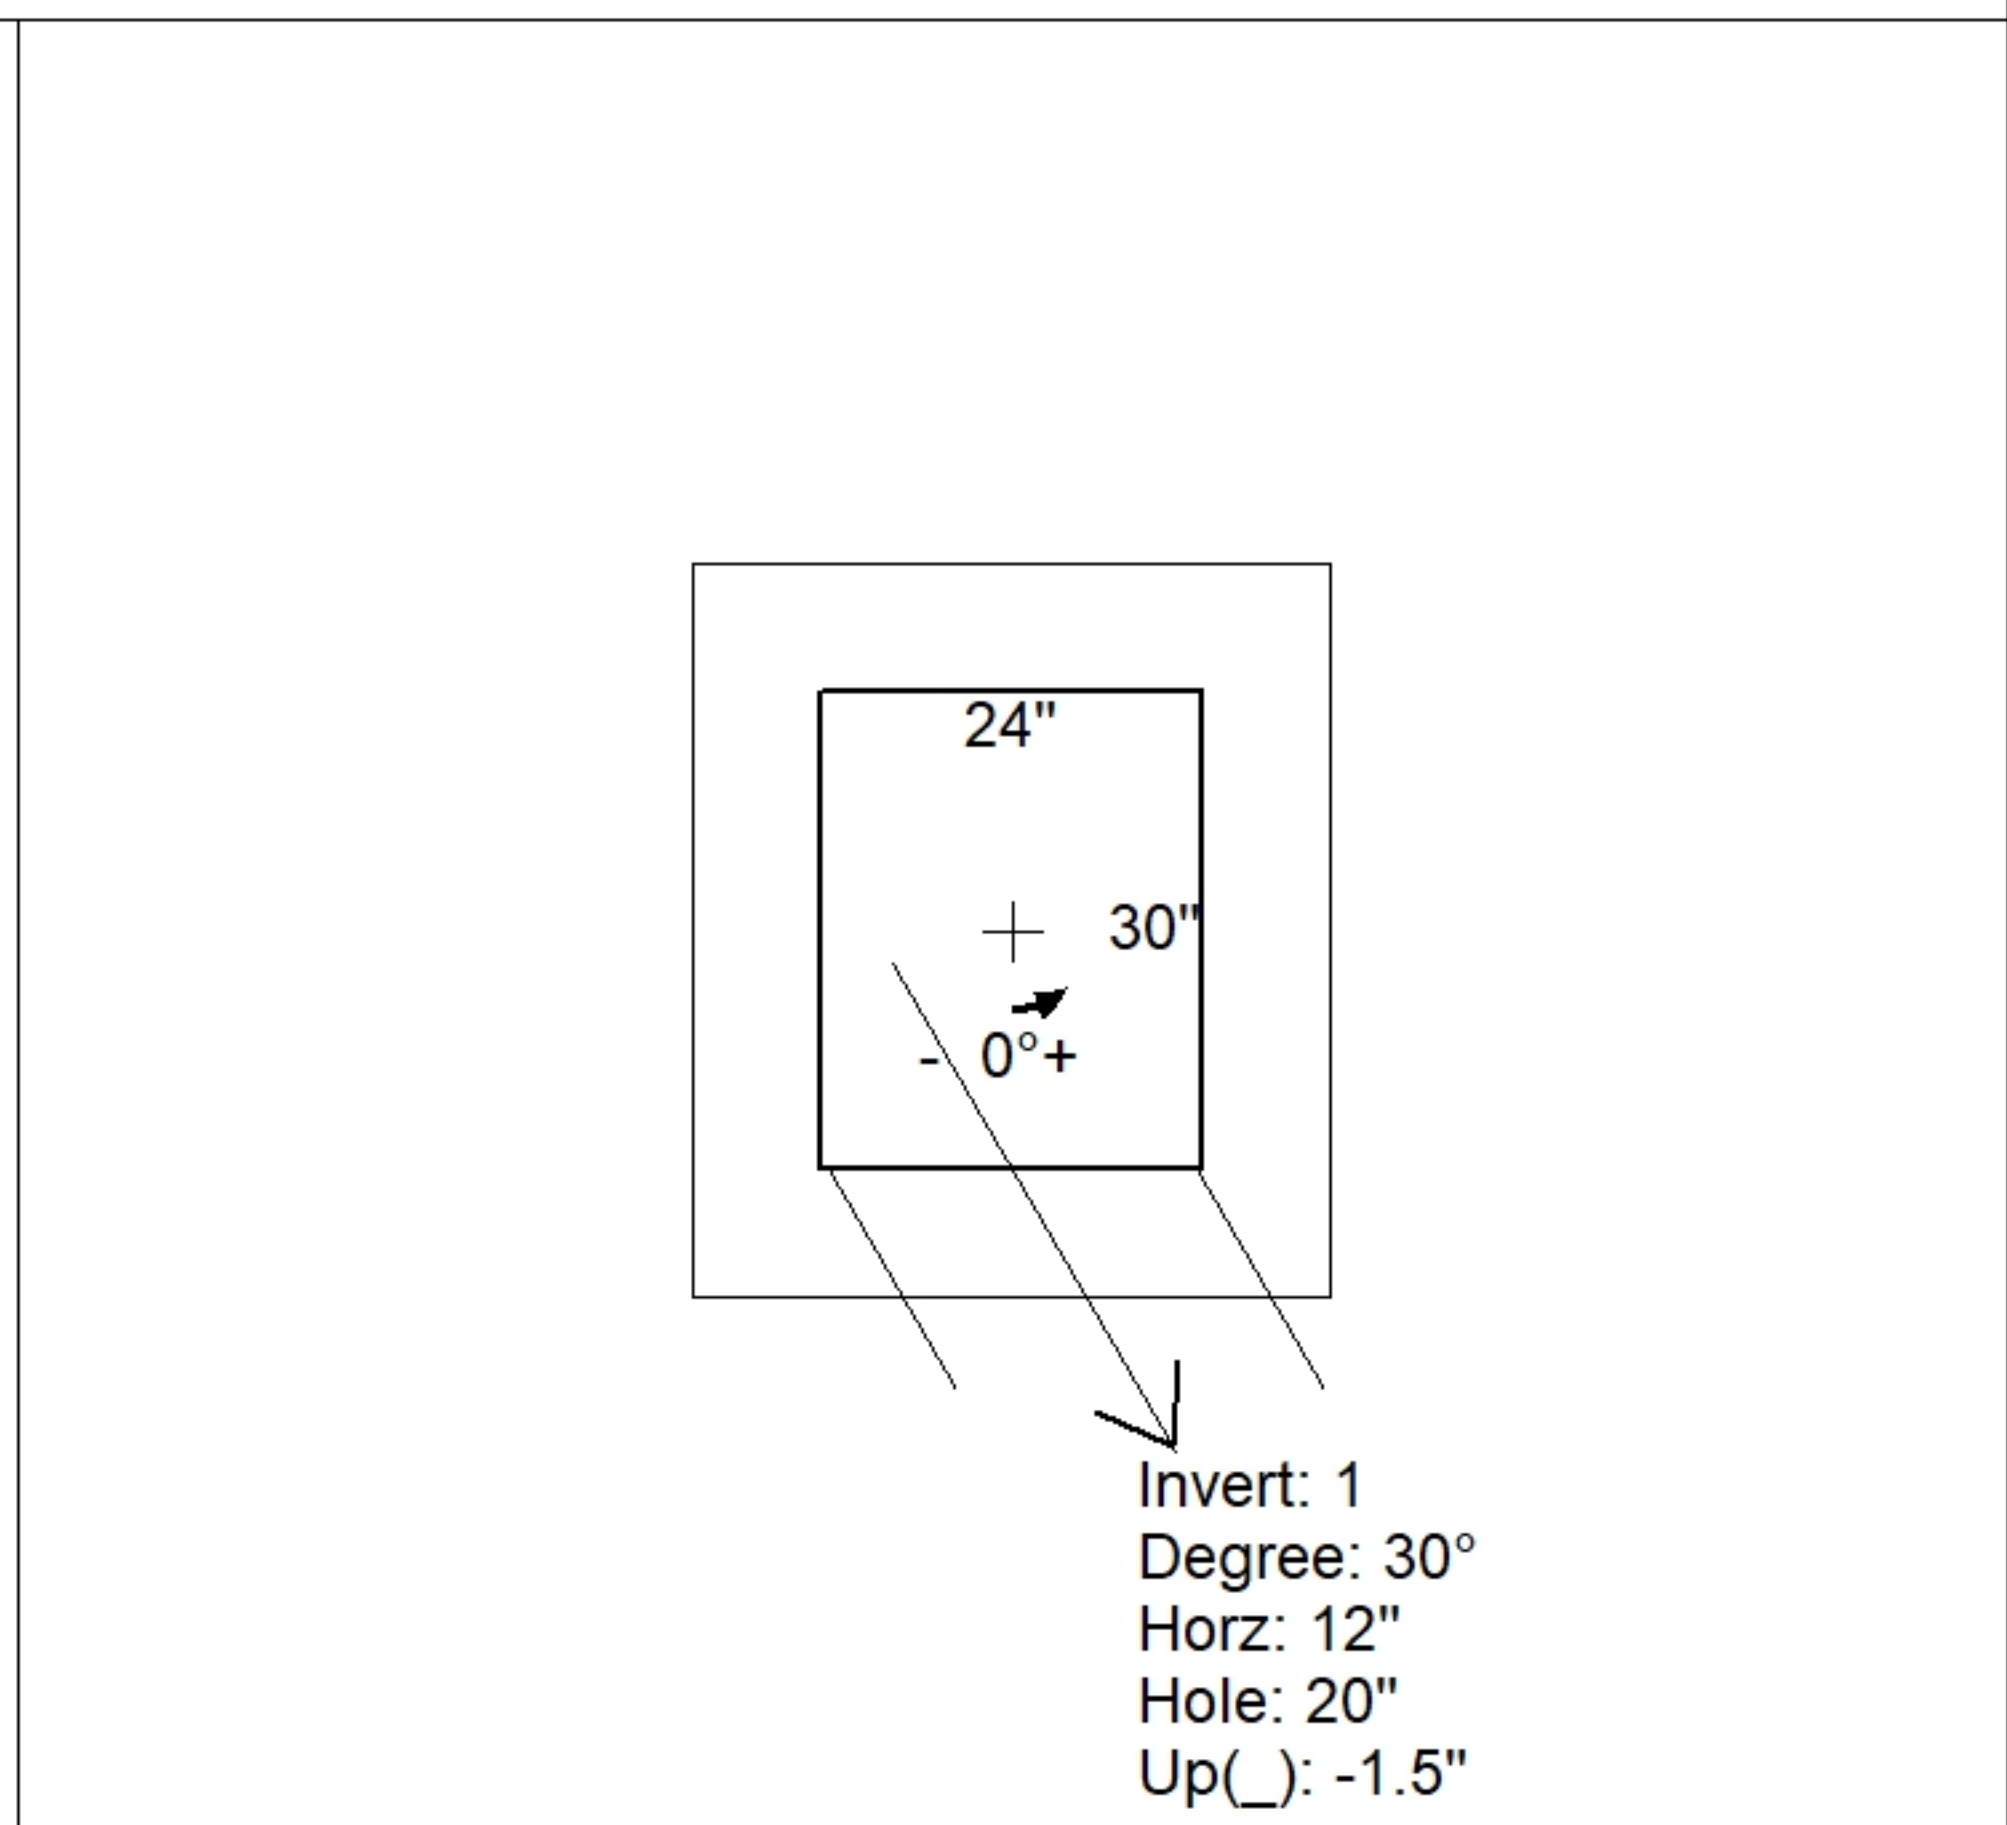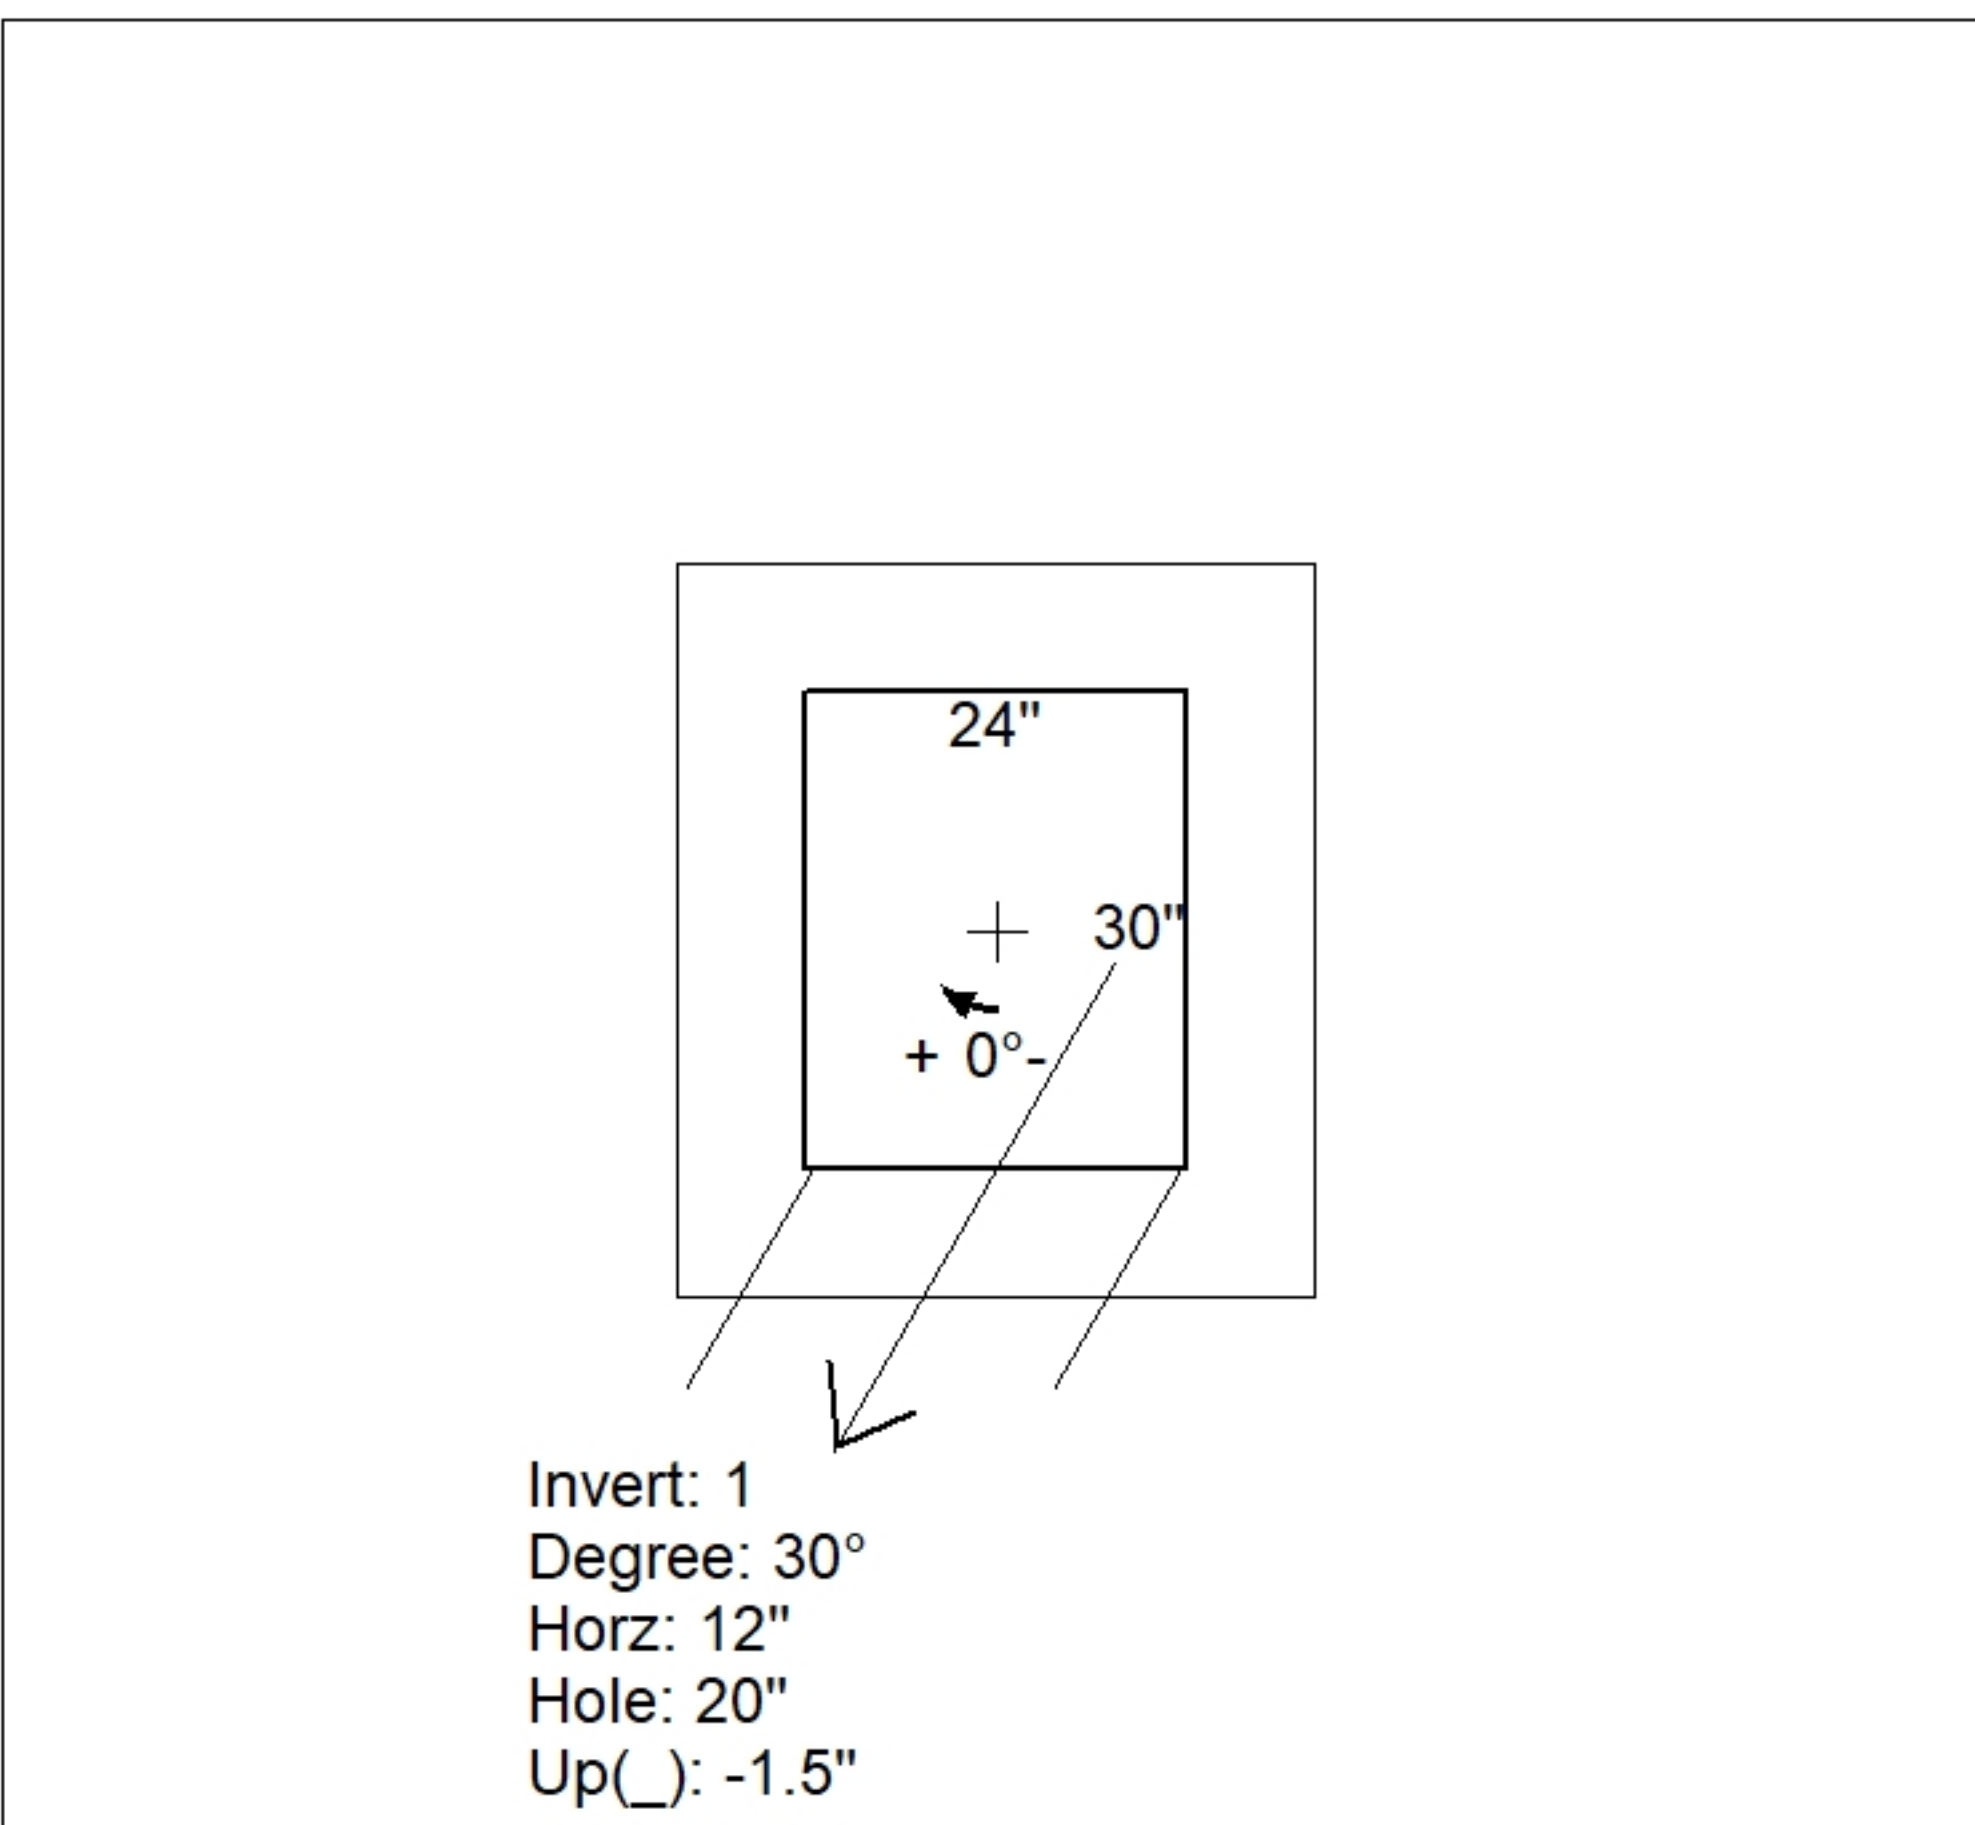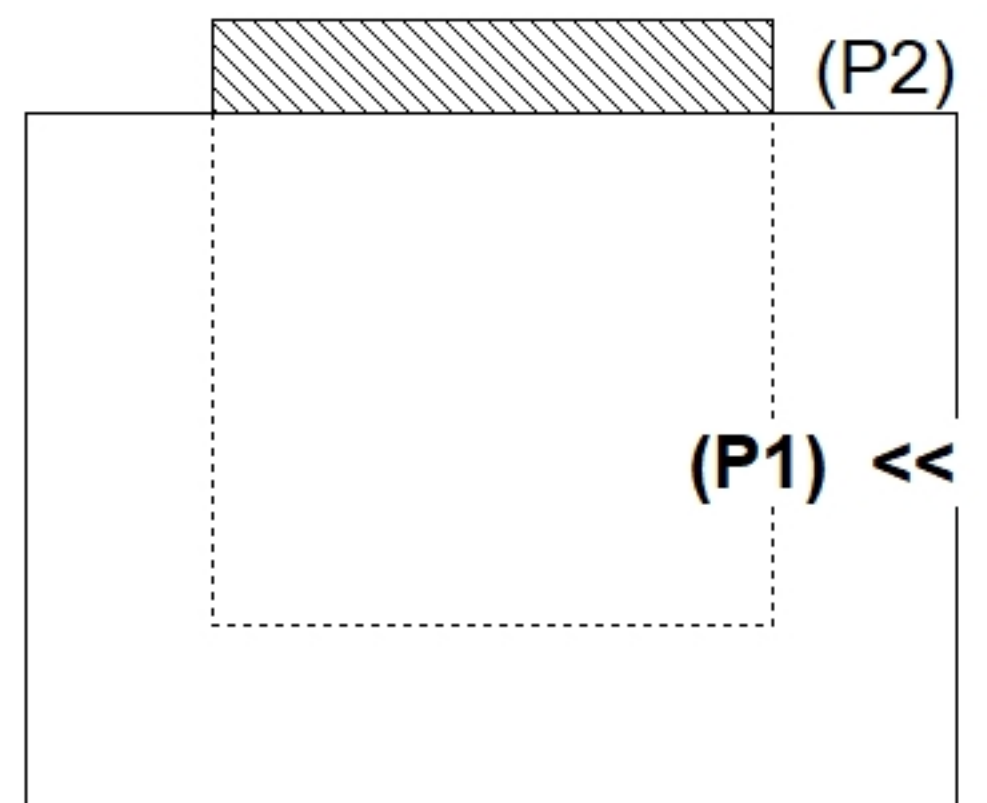

INSIDE WALL DIMENSIONS

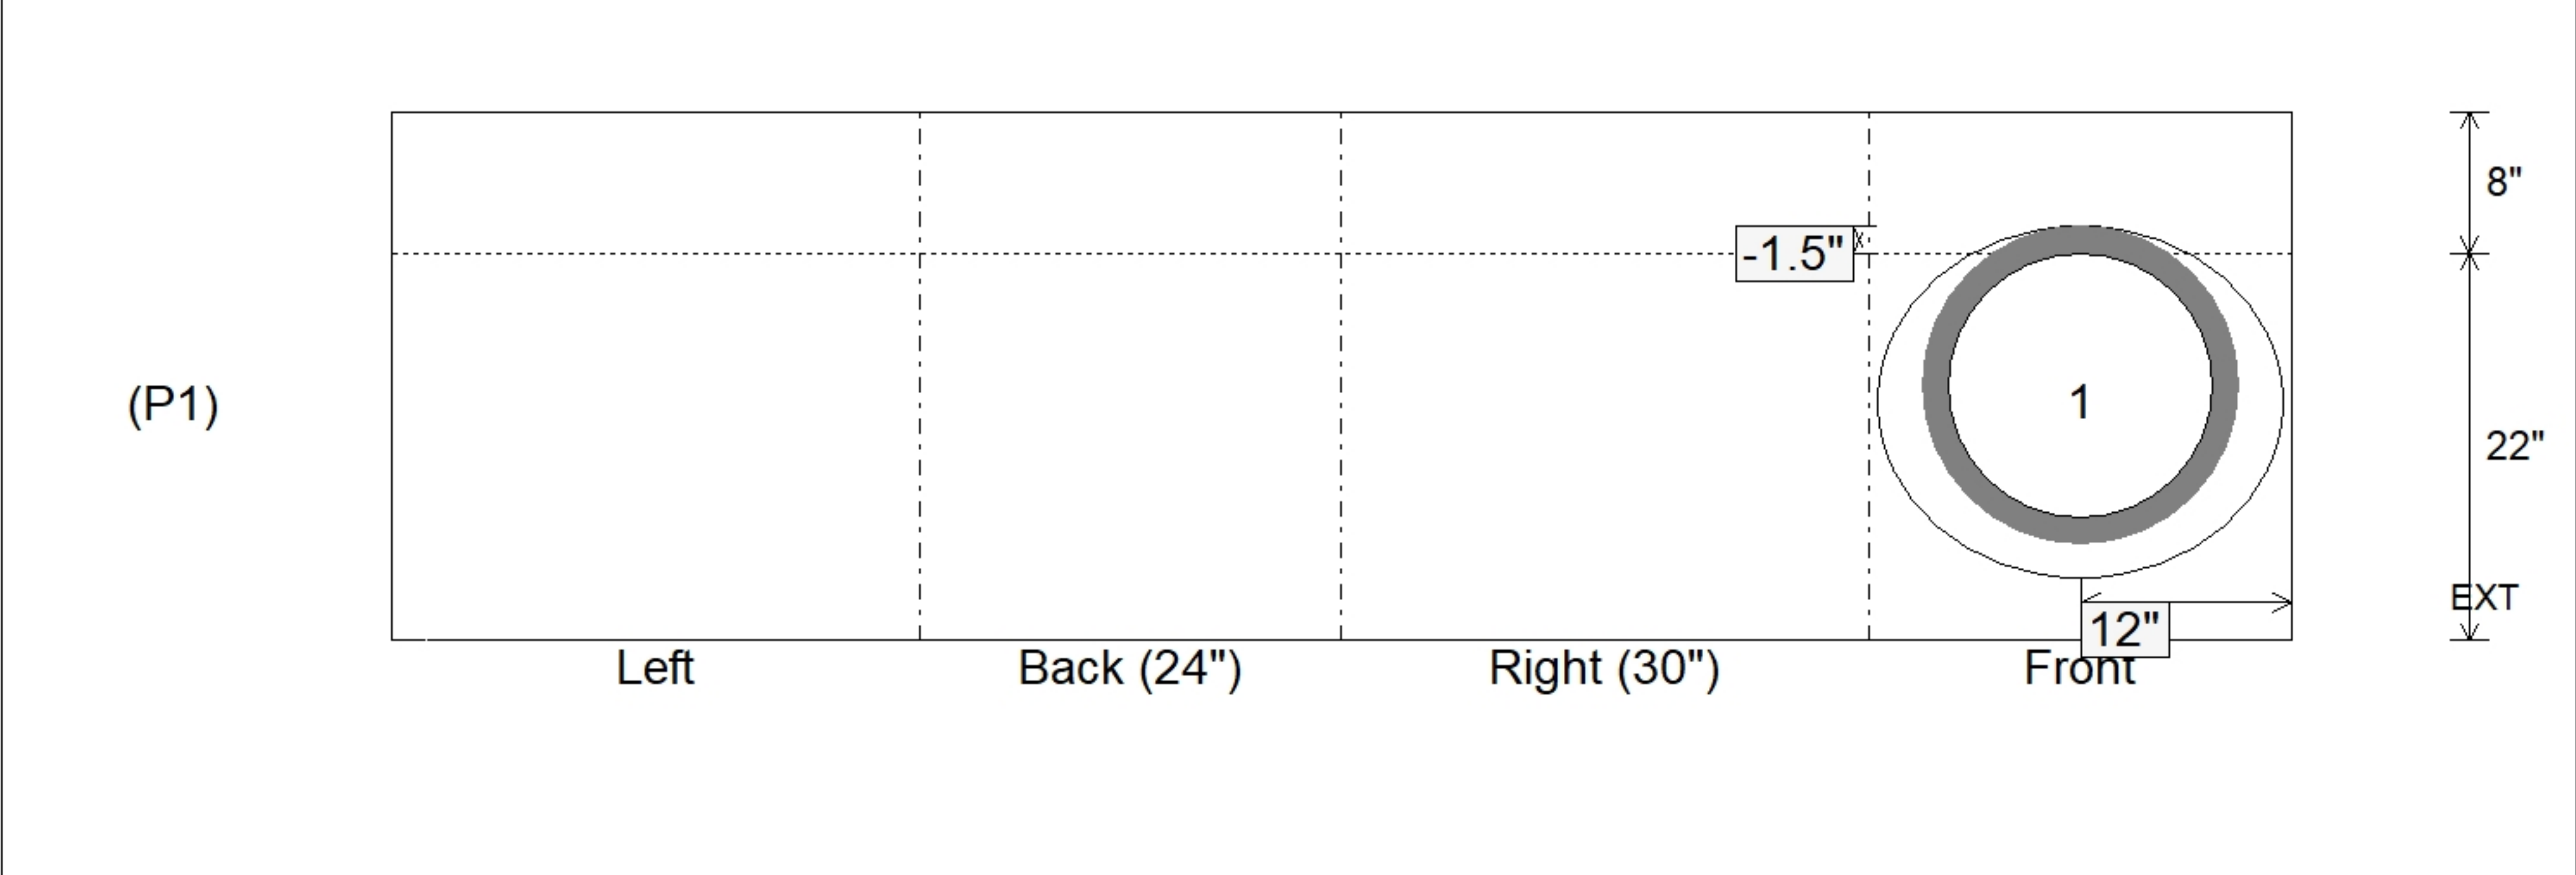

Coating (Int):	Seam Up: Flat	Wall Thickness: 8"	Height (Int): 22"	Weight (Net): 3059 lb Volume (Net): 0.78cu.yd
Coating (Ext):	Seam Dn: n/a	Floor Height: 8"	Height (Ext): 30"	