

Structure ID: CB2C

P1 BX2436-08BVF

BOX BASE 8inW, 8inF, Variable Ht F/n

P3) 24" x 24" - CASTING HEIGHT - 5" P2) 24" x 36" - BX FLAT LID 8inW w/24"x24" HOLE F/F - 8" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 41" 1) 24" x 36" - Conseal CS-102 1.00" 1) 24" x 24" - Conseal CS-102 1.00" 1) Hole - 24"	0 lb 1010 lb 5257 lb 0 lb 0 lb 0 lb ----- 6266 lb	Structure Notes: PLAN LABEL: CB-2C 1. KYTC CBI TYPE F / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. 5" CASTING SUPPLIED BY OTHERS
--	--	---



Structure Total: 6266 lb

Rim: 742' Rim to Invert: 4.5' Slack: 0" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	737.5'	110°	29.023"	18" ADS N-12	22"	Hole 24	24"	25.54"	-3"	-4"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)

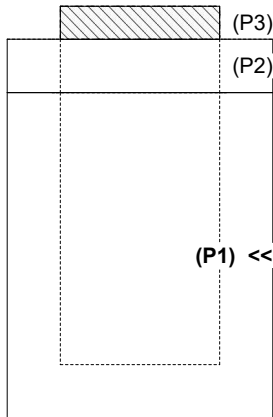

INSIDE WALL DIMENSIONS

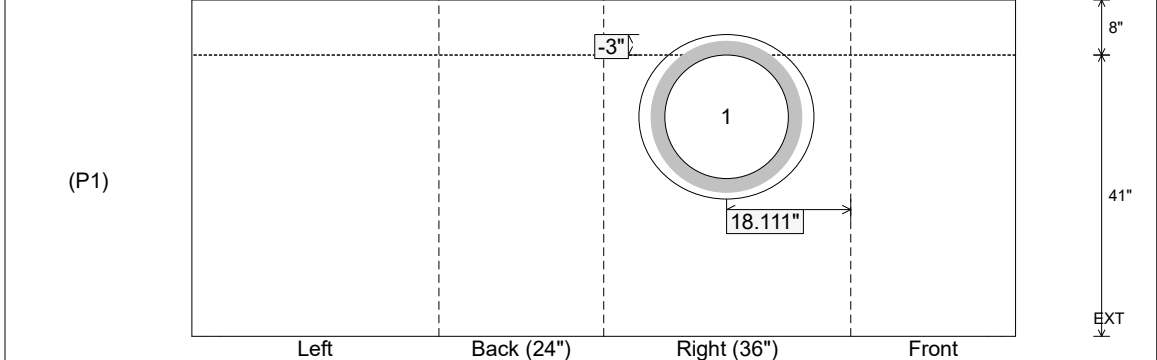

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 41" Height (Ext): 49"	Weight (Net): 5257 lb Volume (Net): 1.34cu.yd
----------------------------------	-------------------------------	--	--	--