

Job Name: 24-2057B The Village At Lemon Mill Sanitary  
 Job Location: Georgetown, KY  
 Contractor: C Squared Contracting LLC

Plant: Beaver Dam

Tech: J. Coppage

10/14/2025 2:28:12 PM

PC: C. Goff



**Structure ID: SSMH-B3 5+16.52**

**P2 MH048CN30-S**



**ECC CONE w/ 24" HOLE NO STEP**

- P4) 24" - CASTING HEIGHT - 7"
- P3) 24" - GRADE RING - 3"
- P2) 48" - ECC CONE w/ 24" HOLE NO STEP - 30"
- P1) 48" - MH BASE - 36"
- 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
- 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
- 1) 48" - MH INVERT CHANNEL - FULL HEIGHT
- 1) CASTING - HOE MC-375 F/C GMWSS
- 1) 48" - DBL 1"x14.5' Butyl (2x)
- 1) A-Lok - 0285
- 1) A-Lok - 0200

- Structure Notes:
1. JR HOE MC-375 GMWSS PROVIDED BY ICAST.
  2. PER ASTM C478 SPECIFICATIONS.
  3. CONCRETE = 4,000 PSI AT 28 DAYS.
  4. REINFORCING PER ASTM A615 (GRADE 60).  
 - CONE (As .12)  
 - RISER/WALLS (As .12)  
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
  5. **\*\*NO STEPS\*\***

0 lb  
 202 lb  
 2050 lb  
 3797 lb  
 0 lb  
 0 lb  
 1440 lb  
 271 lb  
 0 lb  
 1 lb  
 1 lb

Structure Total: 7763 lb

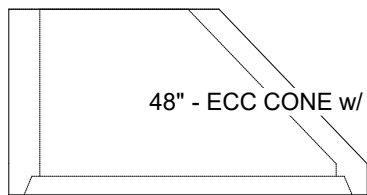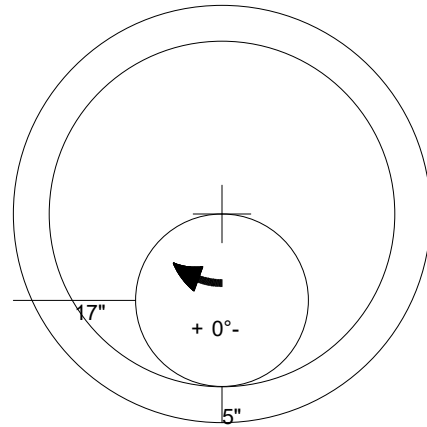

48" - ECC CONE w/ 24" HOLE NO STEP - 30" - (P2)

Coating (Int):  
 Coating (Ext):

Seam Up: Flat  
 Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 30"

Weight (Net): 2050 lb  
 Volume (Net): 0.41cu.yd