



36" - PIPE CULVERT HEADWALL F/F

ISOMETRIC VIEW


STEPPED HOLE FORMER
FOR CORRESPONDING PIPE Ø.
(PIPE O.D. + 3" - 4")

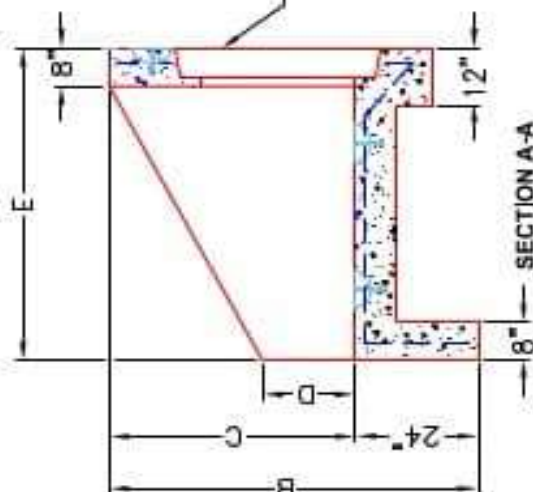

FRONT ELEVATION

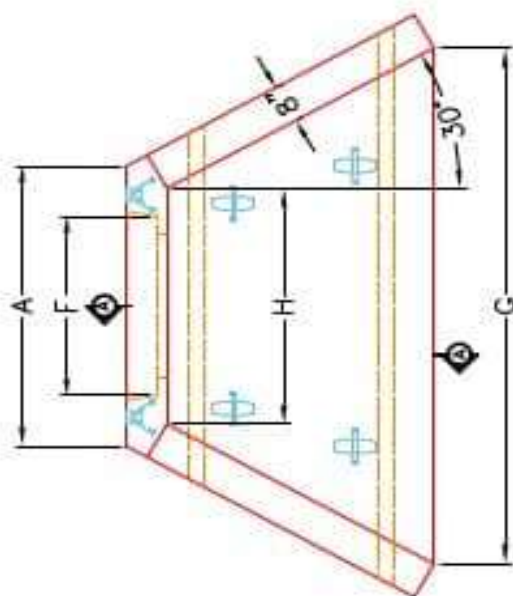

PLAN VIEW

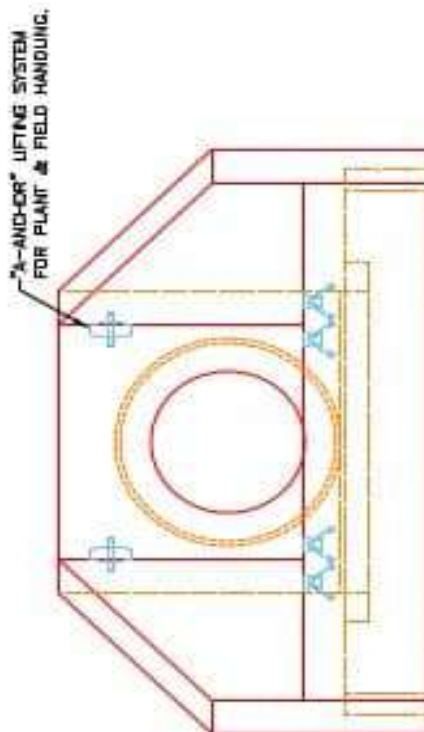

FRONT ELEVATION

NOTES:

1. CONCRETE: KYTC APPROVED.
2. REINFORCING: #5 BAR @ 12" C/C E.W.—GRADE 60,
(WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. PIPE AND LIFTING ANCHOR POCKETS TO BE GROUTED
WITH KYTC APPROVED NON-SHRINK GROUT.
5. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING
RDH-110-02, RDH-210-D3 AND THE STANDARD SPECIFICATIONS FOR ROAD
AND BRIDGE CONSTRUCTION.
6. $\frac{3}{4}$ " CHAMFER ON ALL EXPOSED EDGES.
7. PERFORMED STEPPED HOLE SIZED AS PER O.D. OF PIPE + 3" ± 4".

APPROVED FOR DESIGN ONLY

APPROVED

4/20/2021 9:50 am

170710711



INFRASTRUCTURE PRECAST, INC.
601 WEST 7TH ST., NEWARK NJ, 07102
PHONE: (973) 586-1000, FAX: (973) 586-2001

KYTC 30°-60° PIPE CULVERT HEADWALL

ISSN 0013-7901	ISSN 1365-3113
----------------	----------------

RESEARCHER: DR. J. H. BROWN, JR.	REPORT BY: M. J. JONES
----------------------------------	------------------------

FOR INFO	WWW.JAFCINC.COM
----------	-----------------

THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PROJECT, INC. ANY USE OR REPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.