

Job Name: 25-3194B KYTC Todd Co Call 101 (251113)  
 Job Location: Guthrie, KY  
 Contractor: Scott & Ritter, Inc.

Plant: 100  
 11/17/2025 1:49:05 PM

Tech: J. Horsley - A  
 PC: Celina Goff



**Structure ID: 0+40 (62+75 LT)**



**P3 MH048CN36**

**ECC CONE w/ 24" HOLE F/G**

- P4) 24" - CASTING HEIGHT - 7"
- P3) 48" - ECC CONE w/ 24" HOLE F/G - 36"
- P2) 48" - MH RISER T/G - 36"
- P1) 48" - MH BASE T/n - 30"
- 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
- 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
- 1) 48" - MH INVERT CHANNEL - FULL HEIGHT
- 2) 48" - Conseal CS-102 1.00" (Double)
- 2) PSX - 12-08 NYLO
- 8) MH Step ML-10-TDS-NCR - 10"

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>0 lb</li> <li>3000 lb</li> <li>2515 lb</li> <li>3330 lb</li> <li>0 lb</li> <li>0 lb</li> <li>1440 lb</li> <li>0 lb</li> <li>16 lb</li> <li>0 lb</li> </ul> | <p><b>Structure Notes:</b><br/>           STATION: 0+40 (US 79 NEAR 62+50)<br/>           1. HOE MC-315 F/C "Sanitary" PROVIDED BY ICAST.<br/>           2. PER ASTM C478 SPECIFICATIONS.<br/>           3. CONCRETE = 4,000 PSI AT 28 DAYS.<br/>           4. REINFORCING PER ASTM A615 (GRADE 60).<br/>           - CONE (As .12)<br/>           - RISER/WALLS (As .12)<br/>           - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.</p> |
|---|---|

Structure Total: 10301 lb

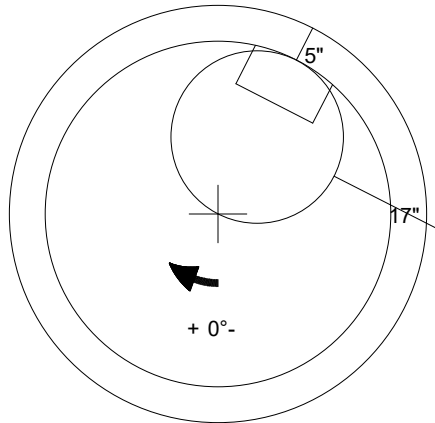

48" - ECC CONE w/ 24" HOLE F/G - 36" - (P3)

|                                  |                                  |                    |                   |   |
|----------------------------------|----------------------------------|--------------------|-------------------|---|
| Coating (Int):<br>Coating (Ext): | Seam Up: Flat<br>Seam Dn: Groove | Wall Thickness: 5" | Height (Ext): 36" | Weight (Net): 3000 lb<br>Volume (Net): 0.5cu.yd |
|----------------------------------|----------------------------------|--------------------|-------------------|---|