

Structure ID: CBI 19

P2 MH060RS24

MH RISER T/G



P4) 18" x 36" - CASTING HEIGHT - 5.5" P3) 60" - MH FLAT TOP w/18"x36" Hole F/G - 13" P2) 60" - MH RISER T/G - 24" P1) 60" - MH BASE Custom Ht T/n - 56" 2) 60" - Conseal CS-102 1.00" 1) 18" x 36" - Conseal CS-102 1.00" 1) Hole - 44 6) MH Step ML-10-TDS-NCR - 10"	0 lb 2658 lb 2505 lb 7738 lb 0 lb 0 lb 0 lb 0 lb ----- 12901 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. STEPS AT 90 DEGREES 5. HOE 580-A FRAME & GRATES SUPPLIED BY OTHERS
--	--	---

Structure Total: 12901 lb


Rim: 1008' Rim to Invert: 8' Slack: 0.35" Sump: 2.85" Step Position: 90°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

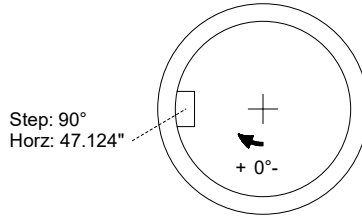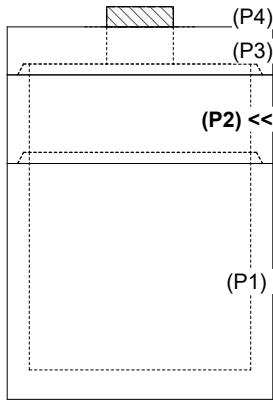

INSIDE WALL DIMENSIONS

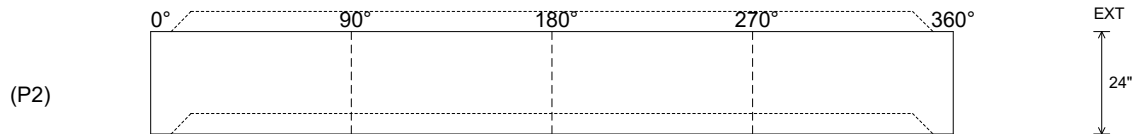

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 6" Floor Height: 0"	Height (Int): 24" Height (Ext): 24"	Weight (Net): 2505 lb Volume (Net): 0.64cu.yd
----------------------------------	------------------------------------	--	--	--