

Contractor: Hinkle Construction Services, LLC


Plant: 100



Slack: 4.44"

5. RIM ELEVATION AS SHOWN ON THIS SUBMITTAL IS TO THE TOP OF CURB (8" ABOVE FLOW LINE ELEVATION PROVIDED IN PLANS).


Structure Total: 13364 lb

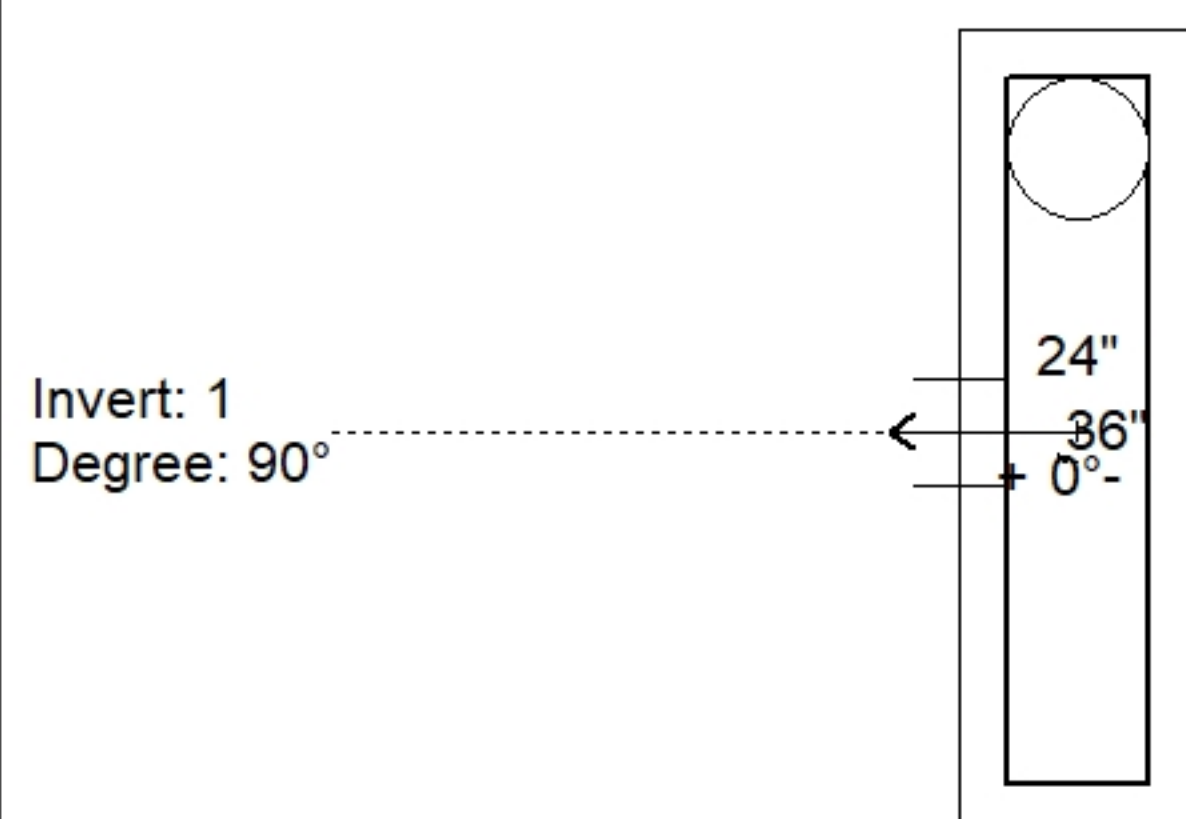

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (⌵)	Ref
Rim	656.4'							
Reducer								
Invert 1	651.03'	90°	15" CMP	16"	18"	Hole 18	-1.5"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 32" - (P1)

(P1)

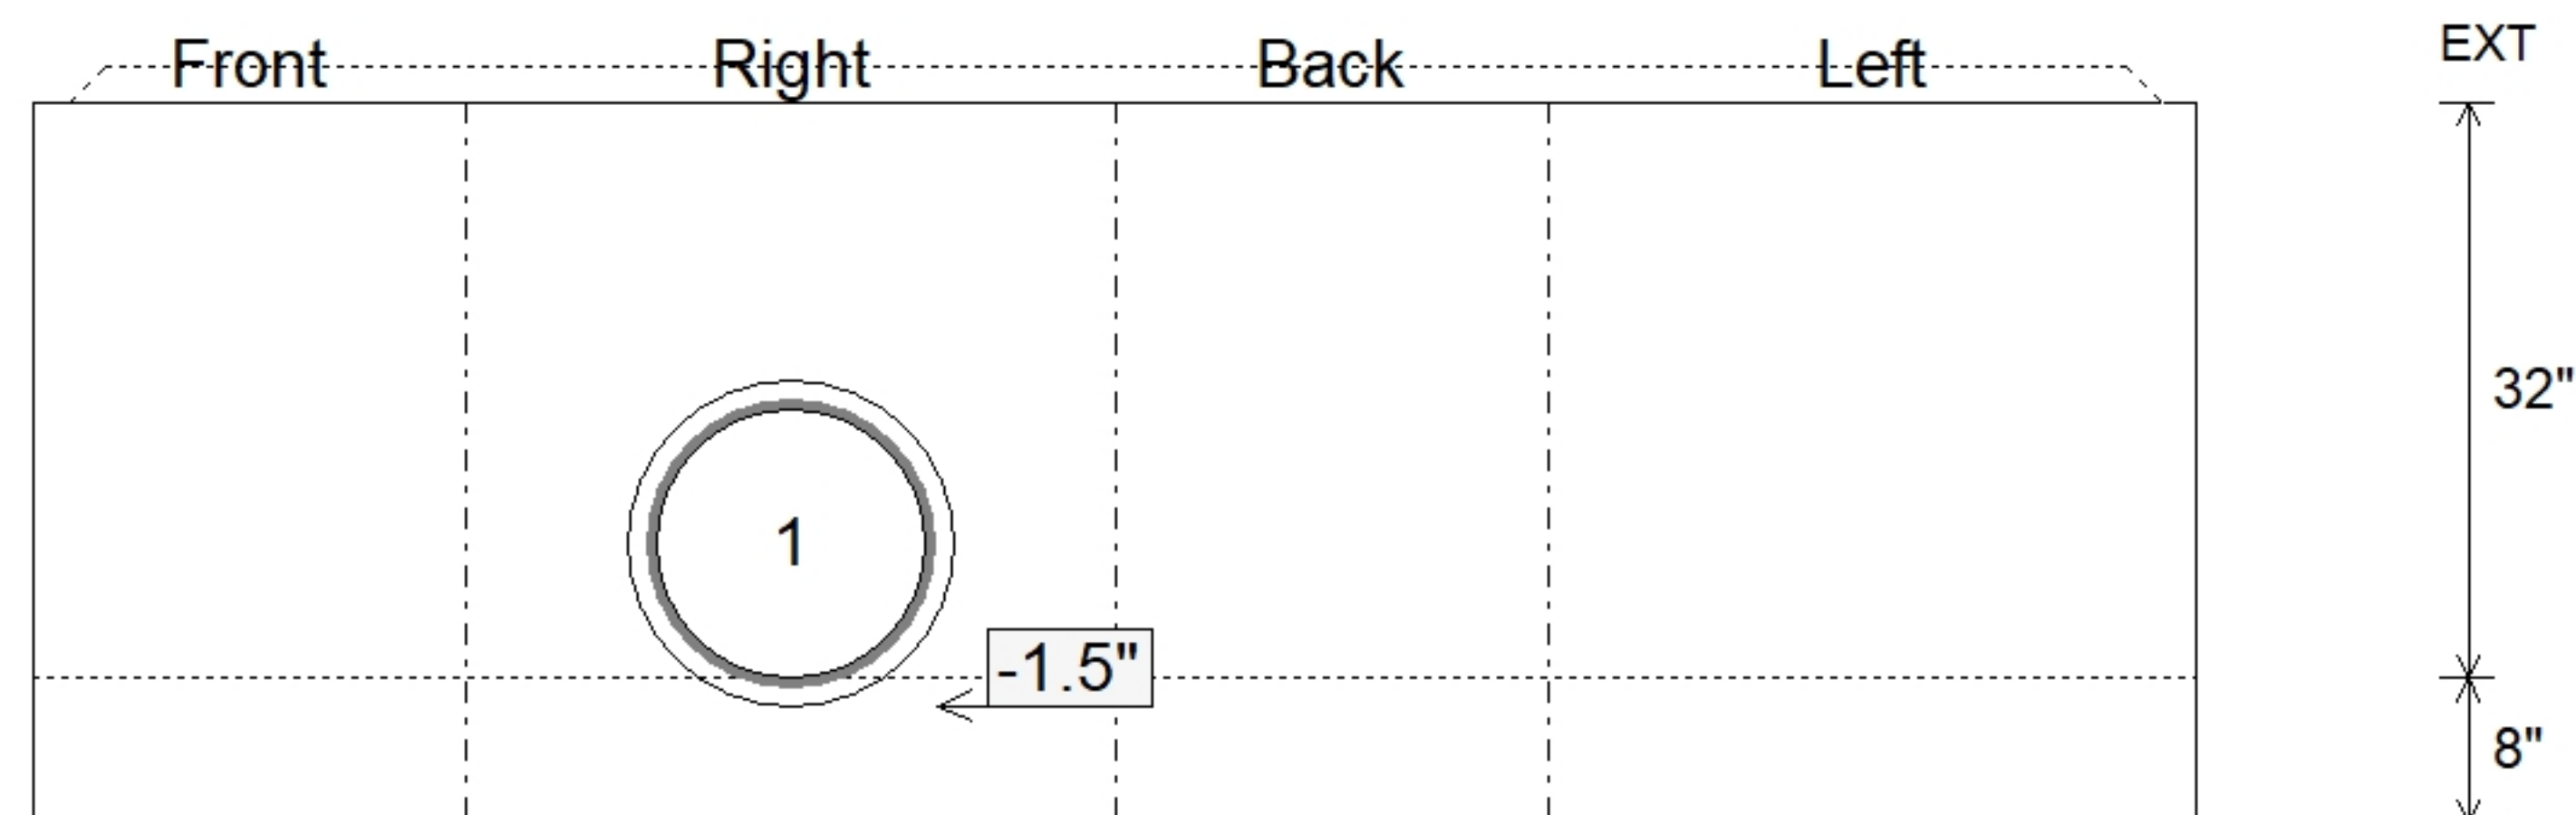

SUBMITTAL
APPROVED BY: