

**Job Name: 25-3198 - Garner Farm Ph 2**  
**Job Location: Somerset, Ky**  
**Contractor: Weddle Enterprises, Inc**

PC: C. Goff  
 TECH: C. Russ  
 Plant: Beaver Dam



Structure ID: CBI 26

Spec: Storm  
 Type: STM.MH  
 Size: 60"

Rim: 1045.7'  
 Invert: 1037.7'  
 Rim to Invert: 8'

Sump: 2.85"  
 Floor (Top): 1037.463'  
 Floor Height: 8"


Floor (Bot): 1036.796'  
 Overall Height: 8.875'  
 Slack: 0.35"

**Structure Notes:**


- PER ASTM C-478 SPECIFICATIONS
- CONCRETE: 4,000 PSI AT 28 DAYS
- REINFORCEMENT:
  - FLAT LID: #5 BAR @ 6" C.C. E.W. (GRADE 60)
  - BASE & RISER: PER ASTM A615
- NO STORM INVERT
- STEPS AT 90 DEGREES
- HOE 580-A FRAME & GRATES SUPPLIED BY OTHERS

**STRUCTURE SUMMARY:**


P4) 18" x 36" - CASTING HEIGHT - 5.5"	0 lb
P3) 60" - MH FLAT TOP w/18"x36" Hole F/G - 13"	2658 lb
P2) 60" - MH RISER T/G - 24"	2505 lb
P1) 60" - MH BASE Custom Ht T/n - 56"	6663 lb
2) 60" - Conseal CS-102 1.00"	0 lb
1) 18" x 36" - Conseal CS-102 1.00"	0 lb
2) Hole - 44	0 lb
1) Hole - 24	0 lb
6) MH Step ML-10-TDS-NCR - 10"	0 lb
<b>Structure Total:</b>	<b>11826 lb</b>

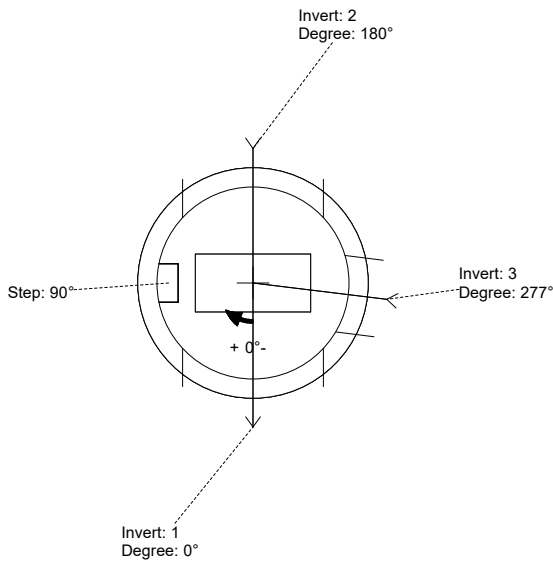

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (")	Ref
Rim	1045.7'							
Reducer								
Invert 1	1037.7'	0°	36" HDPE	41.7"	44"	Hole 44	0"	P1
Invert 2	1037.7'	180°	36" HDPE	41.7"	44"	Hole 44	0"	P1
Invert 3	1037.7'	277°	18" HDPE	21.2"	24"	Hole 24	1.25"	P1
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

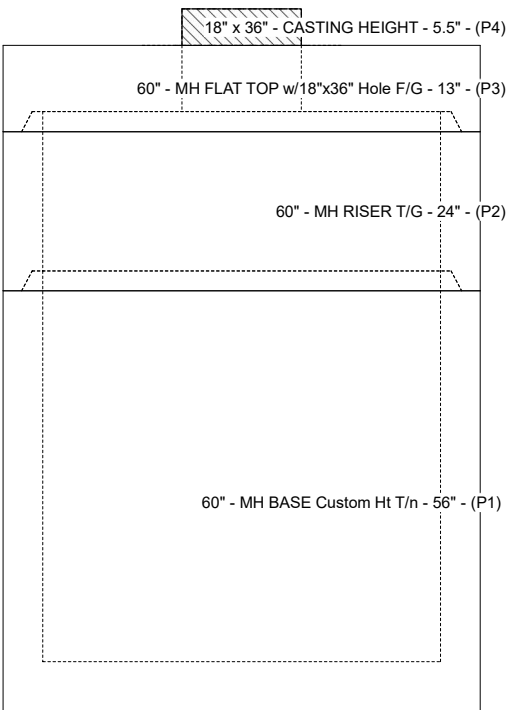

**Cast (Int. Dim.) - Interior Dimensions**

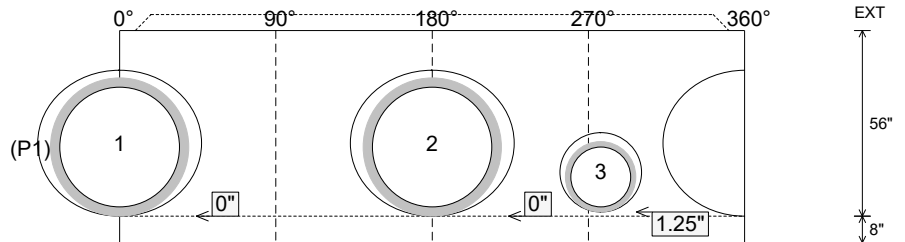

Submittal Drawing  
 1/27/2026 2:03:20 PM

SUBMITTAL  
 APPROVED BY: