

**Structure ID: C1**

**P1 BX18180606VF**

**BOX BASE 6inW, 6inF, Variable Ht F/n**

P2) 18" x 18" - CASTING HEIGHT - 4" P1) 18" x 18" - BOX BASE 6inW, 6inF, Variable Ht F/n - 20" 1) 18" x 18" - SGL 1"x14.5' Butyl 1) Hole - 16	0 lb 1319 lb 0 lb 0 lb <hr style="width: 50px; margin: 0;"/> Structure Total: 1319 lb
--	---

**Structure Notes:**




1. PER ASTM C913 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. HOE 165-A F/G BY ICAST
4. REINFORCING PER ASTM A615 (GRADE 60).  
 - WALLS (As .12) #5 BARS AT 12" C.C.E.W.  
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 903.85'      Rim to Invert: 2'      Slack: 0"      Sump: 0"      Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	901.85'	0°	15"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

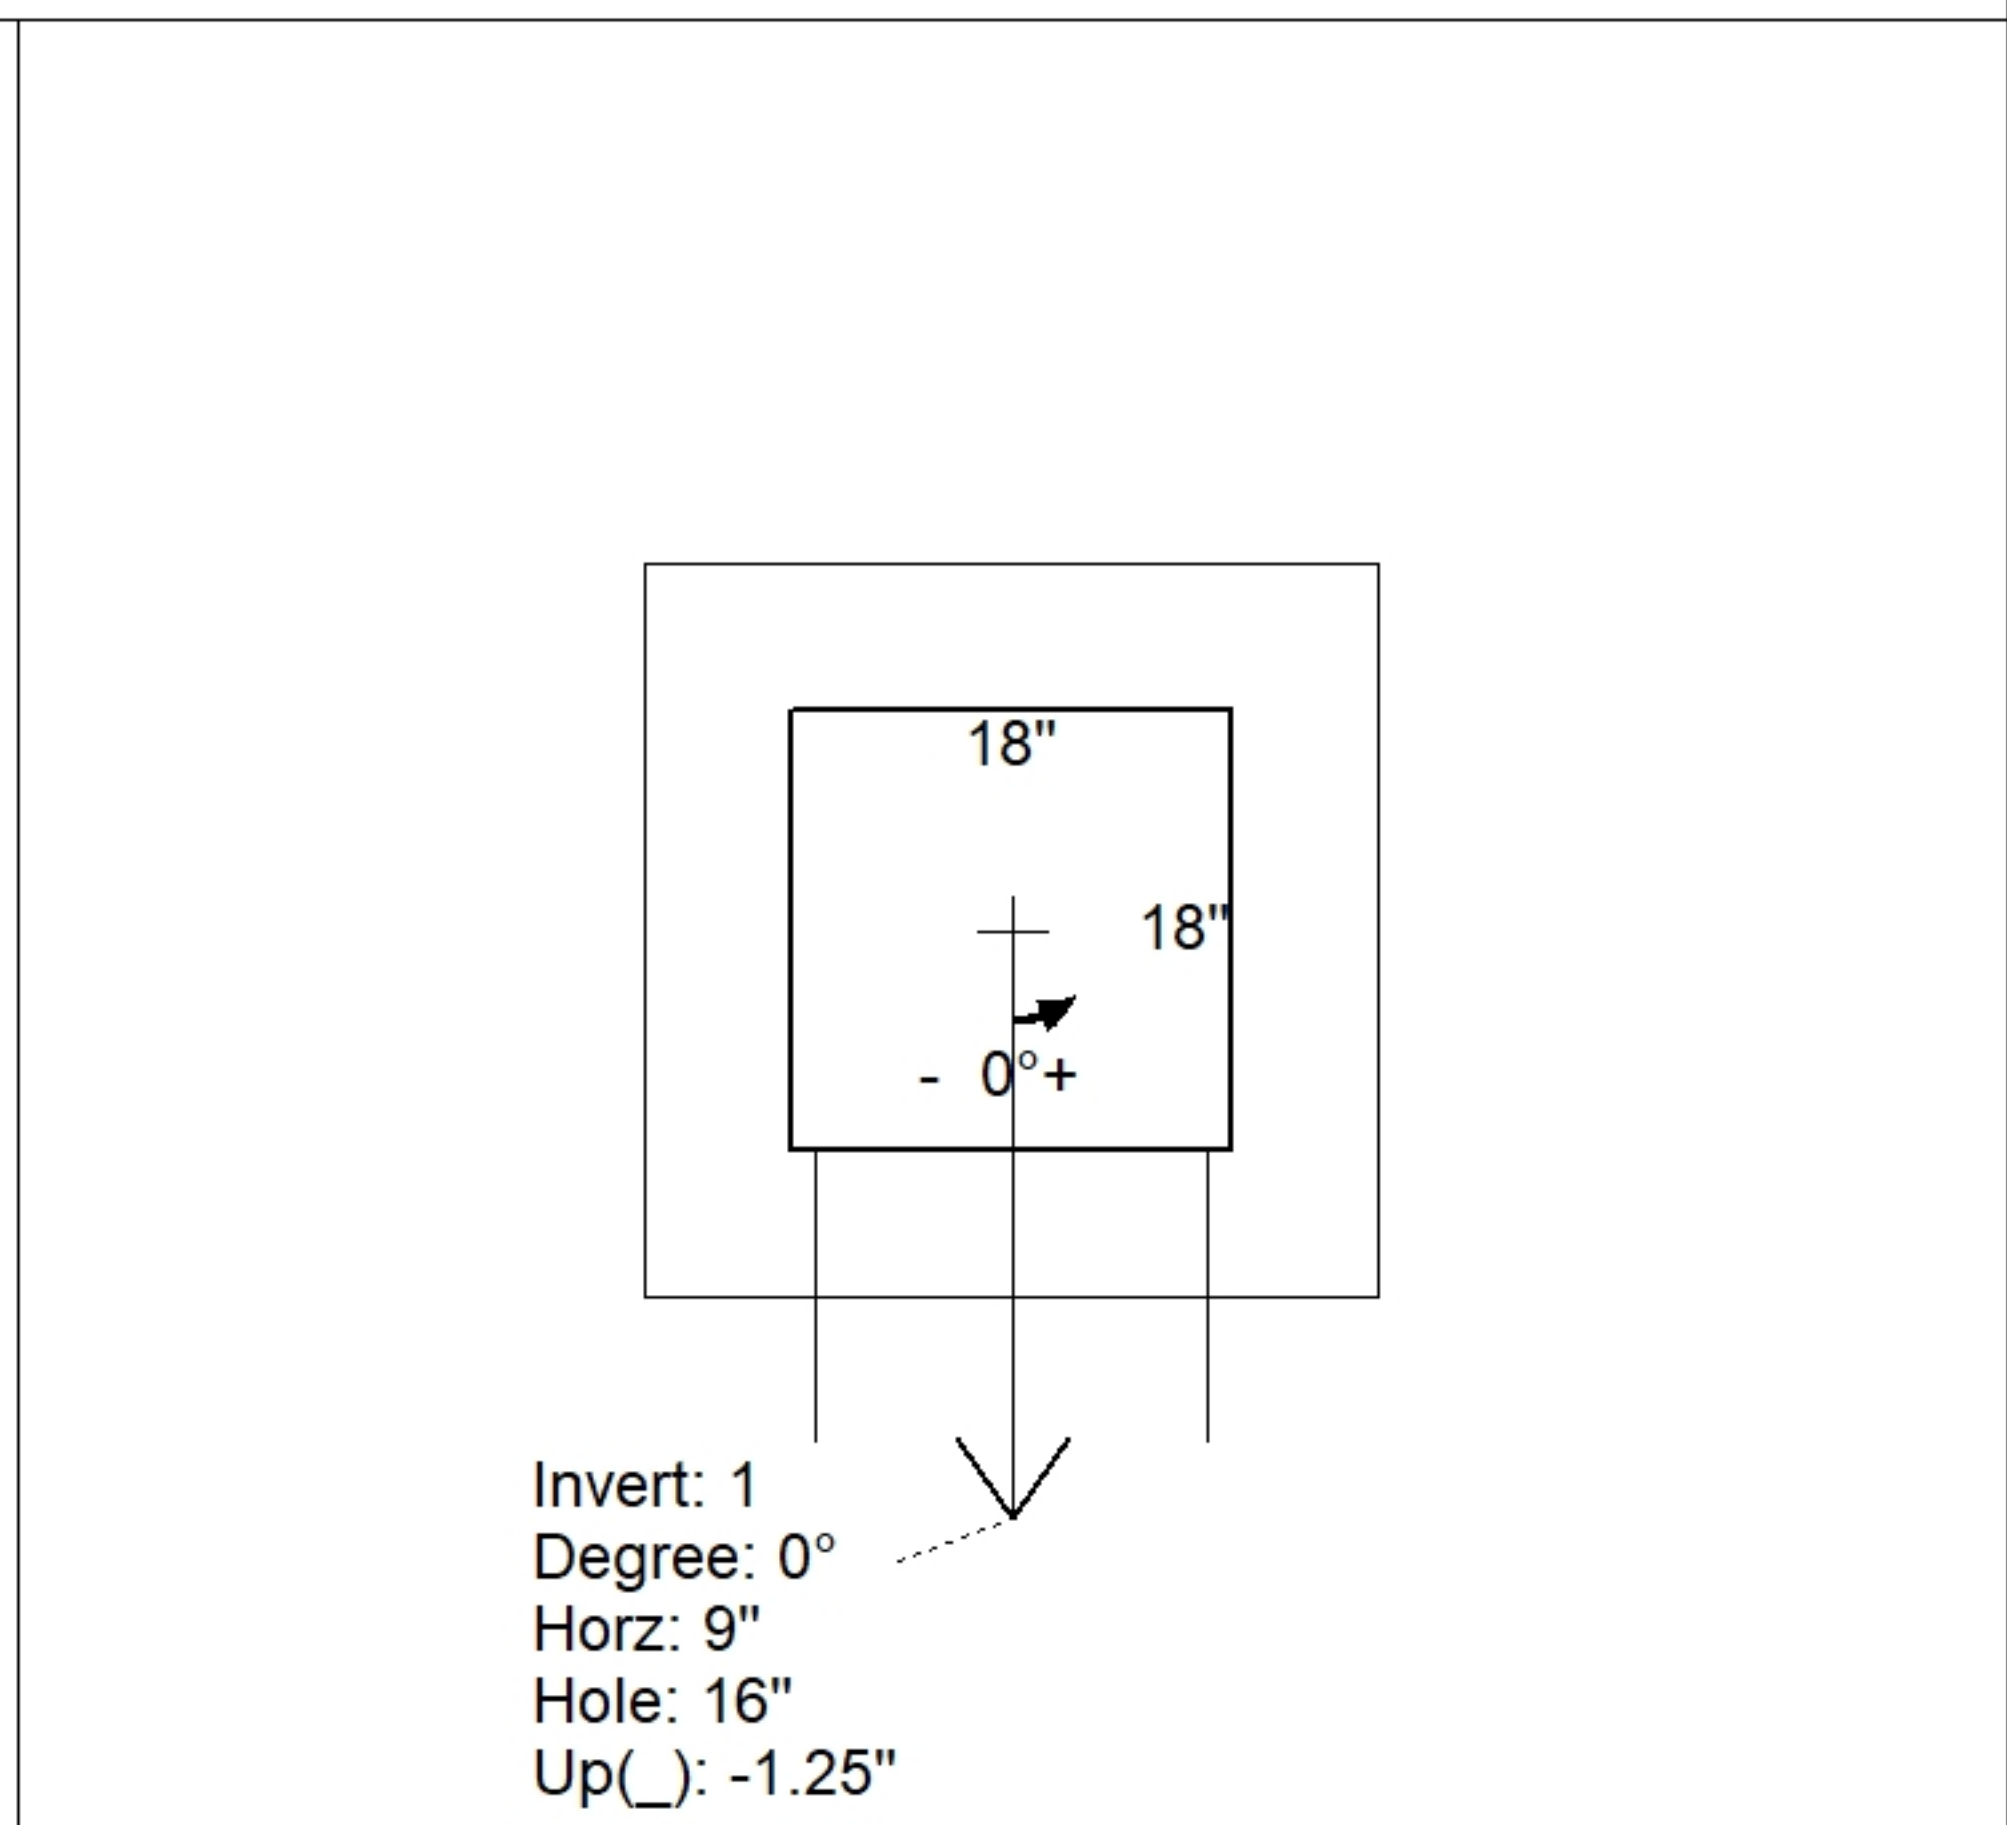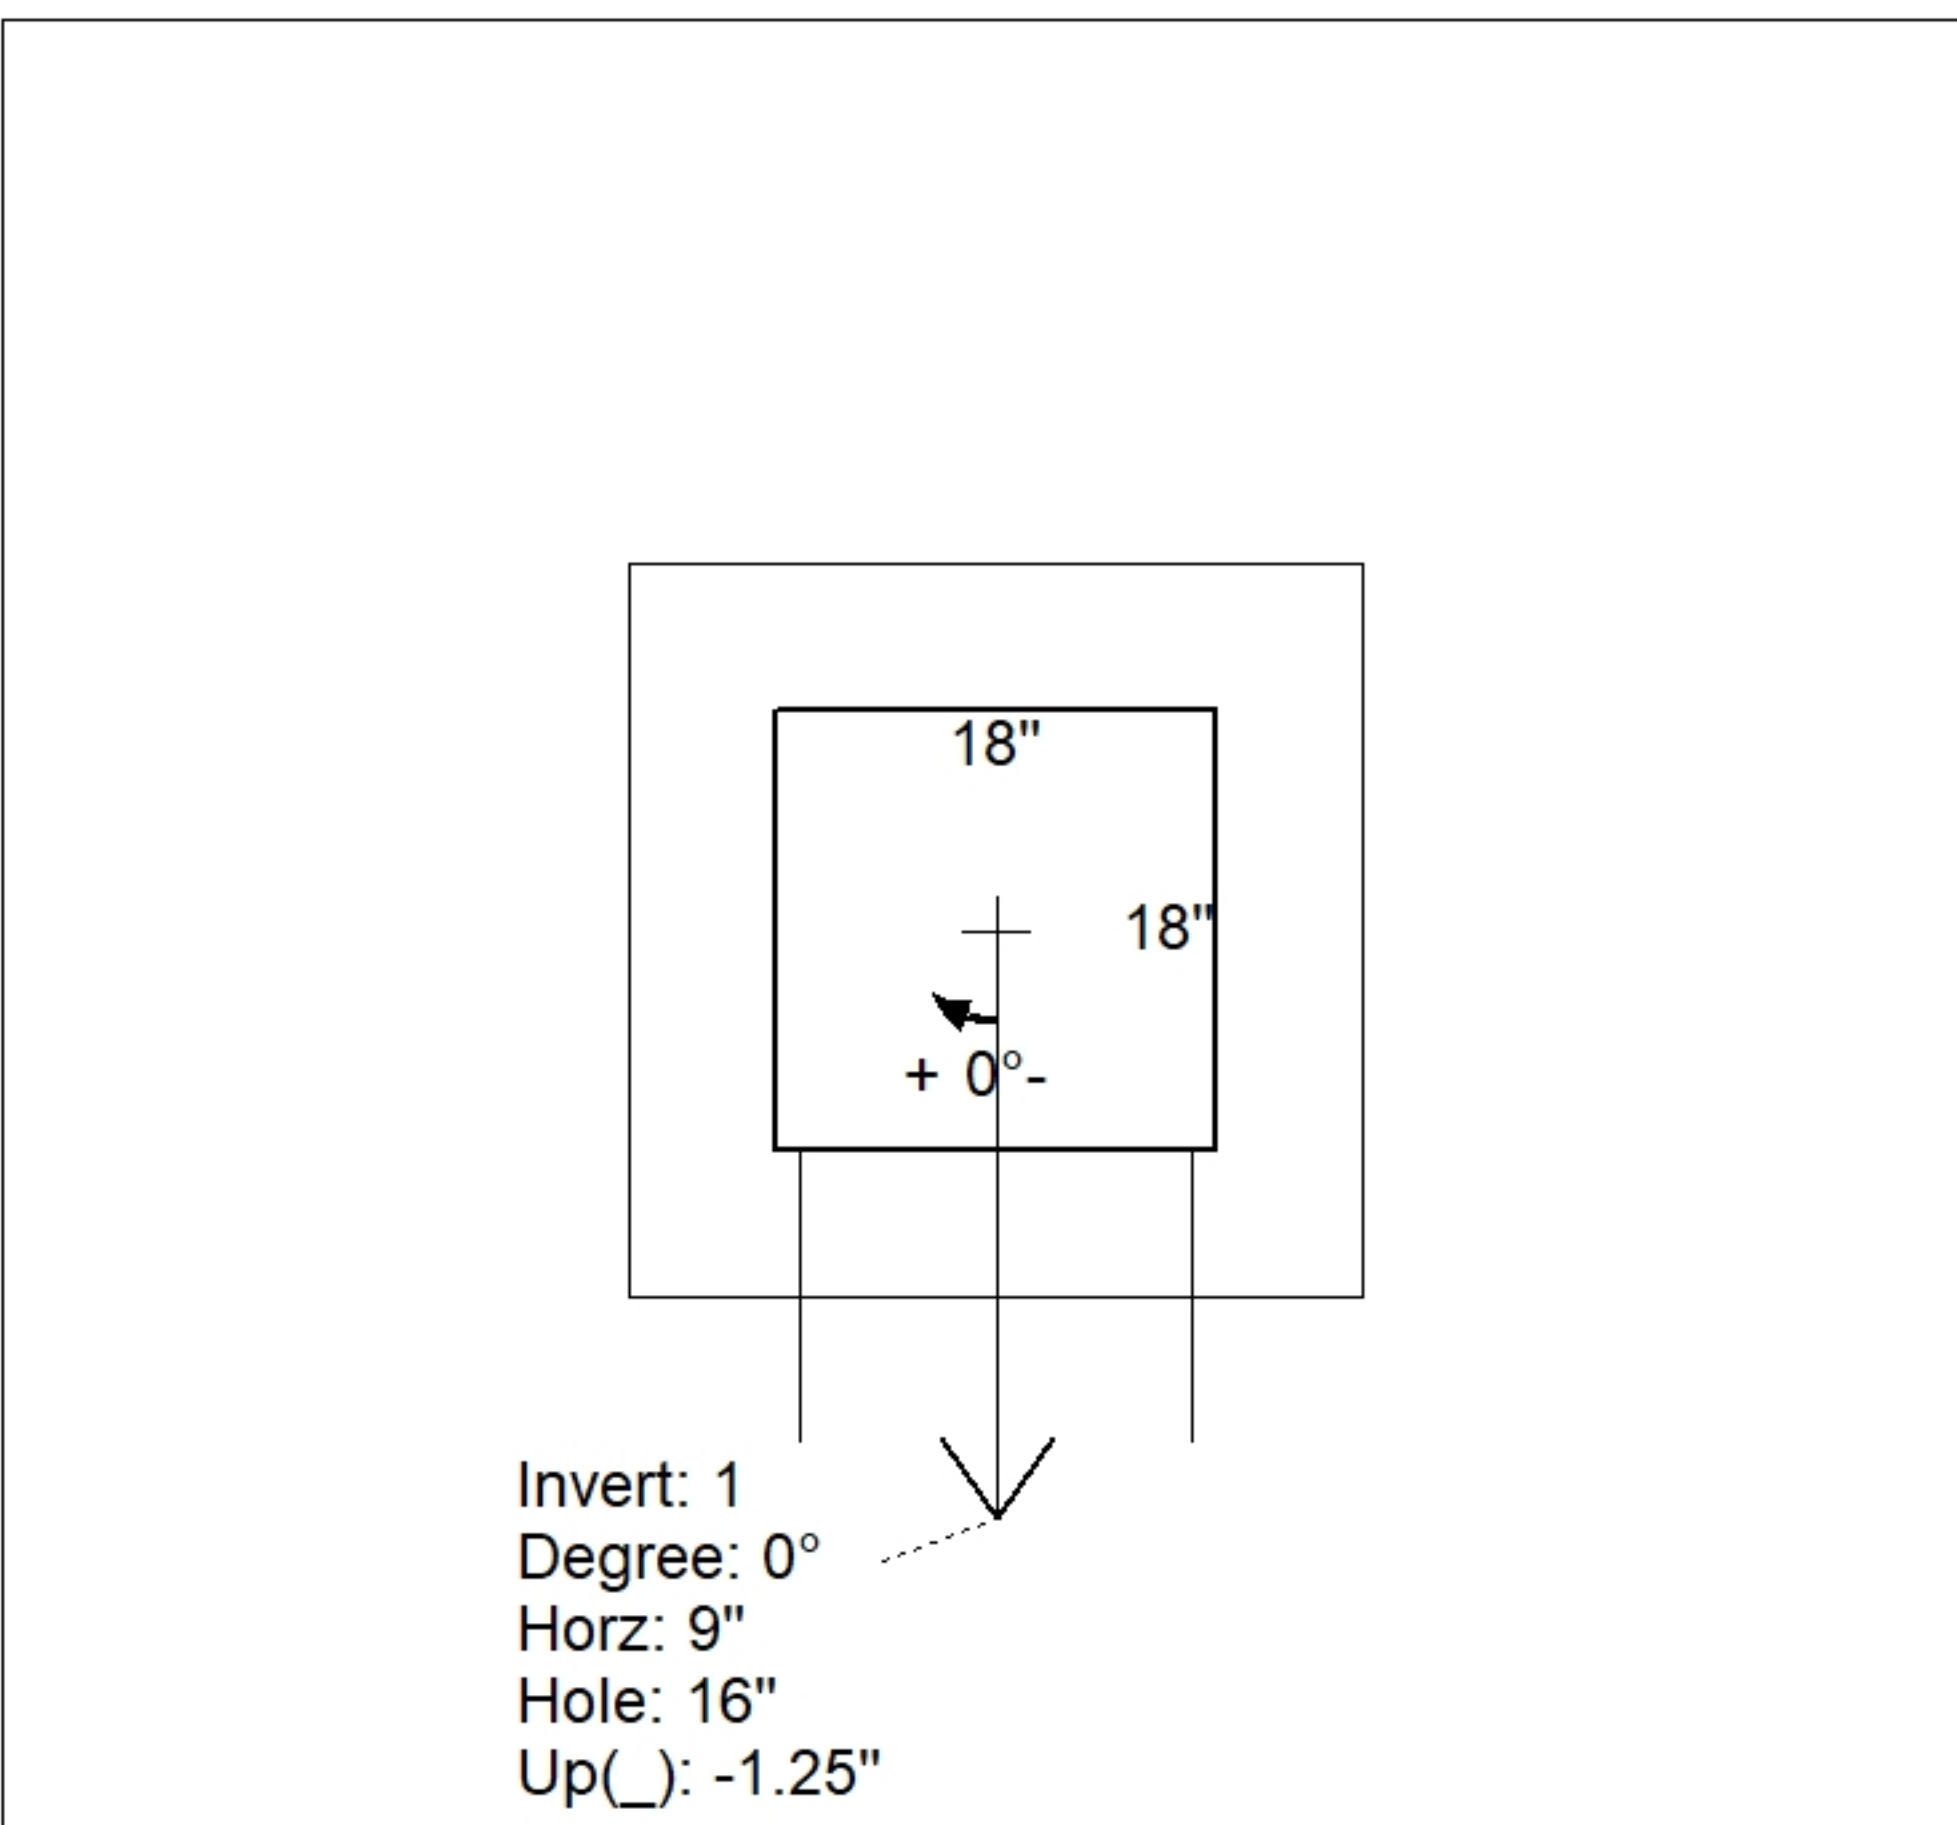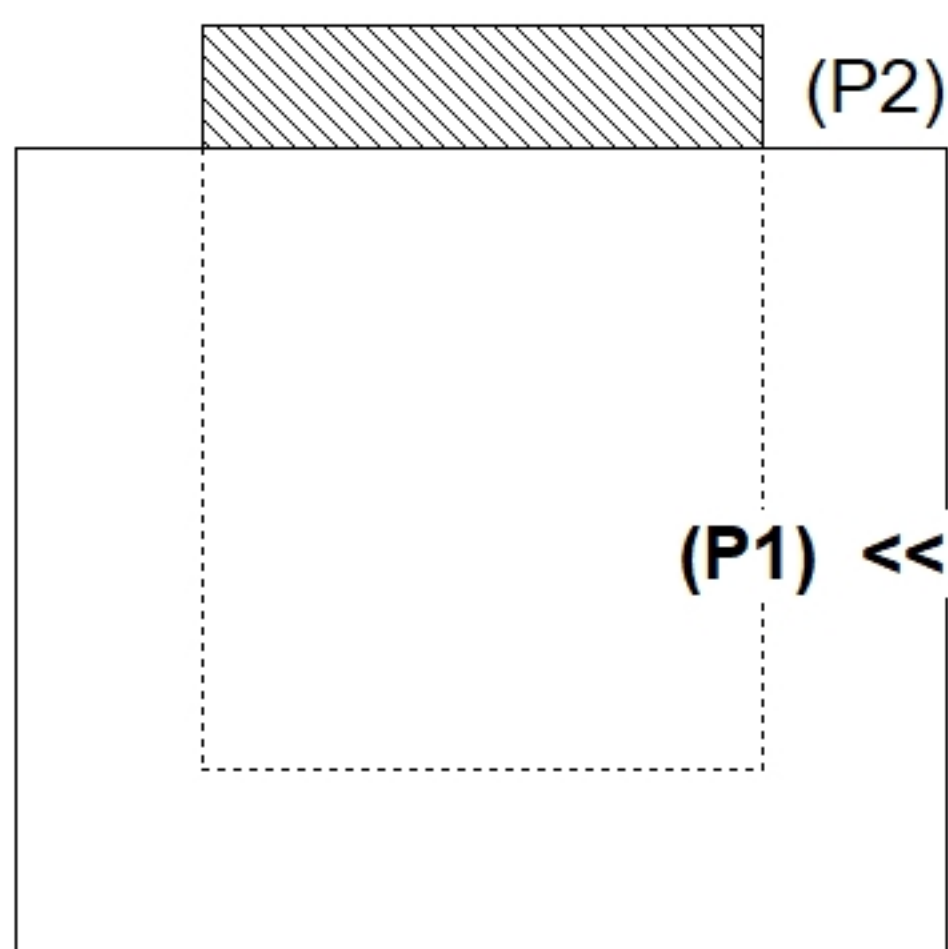

INSIDE WALL DIMENSIONS

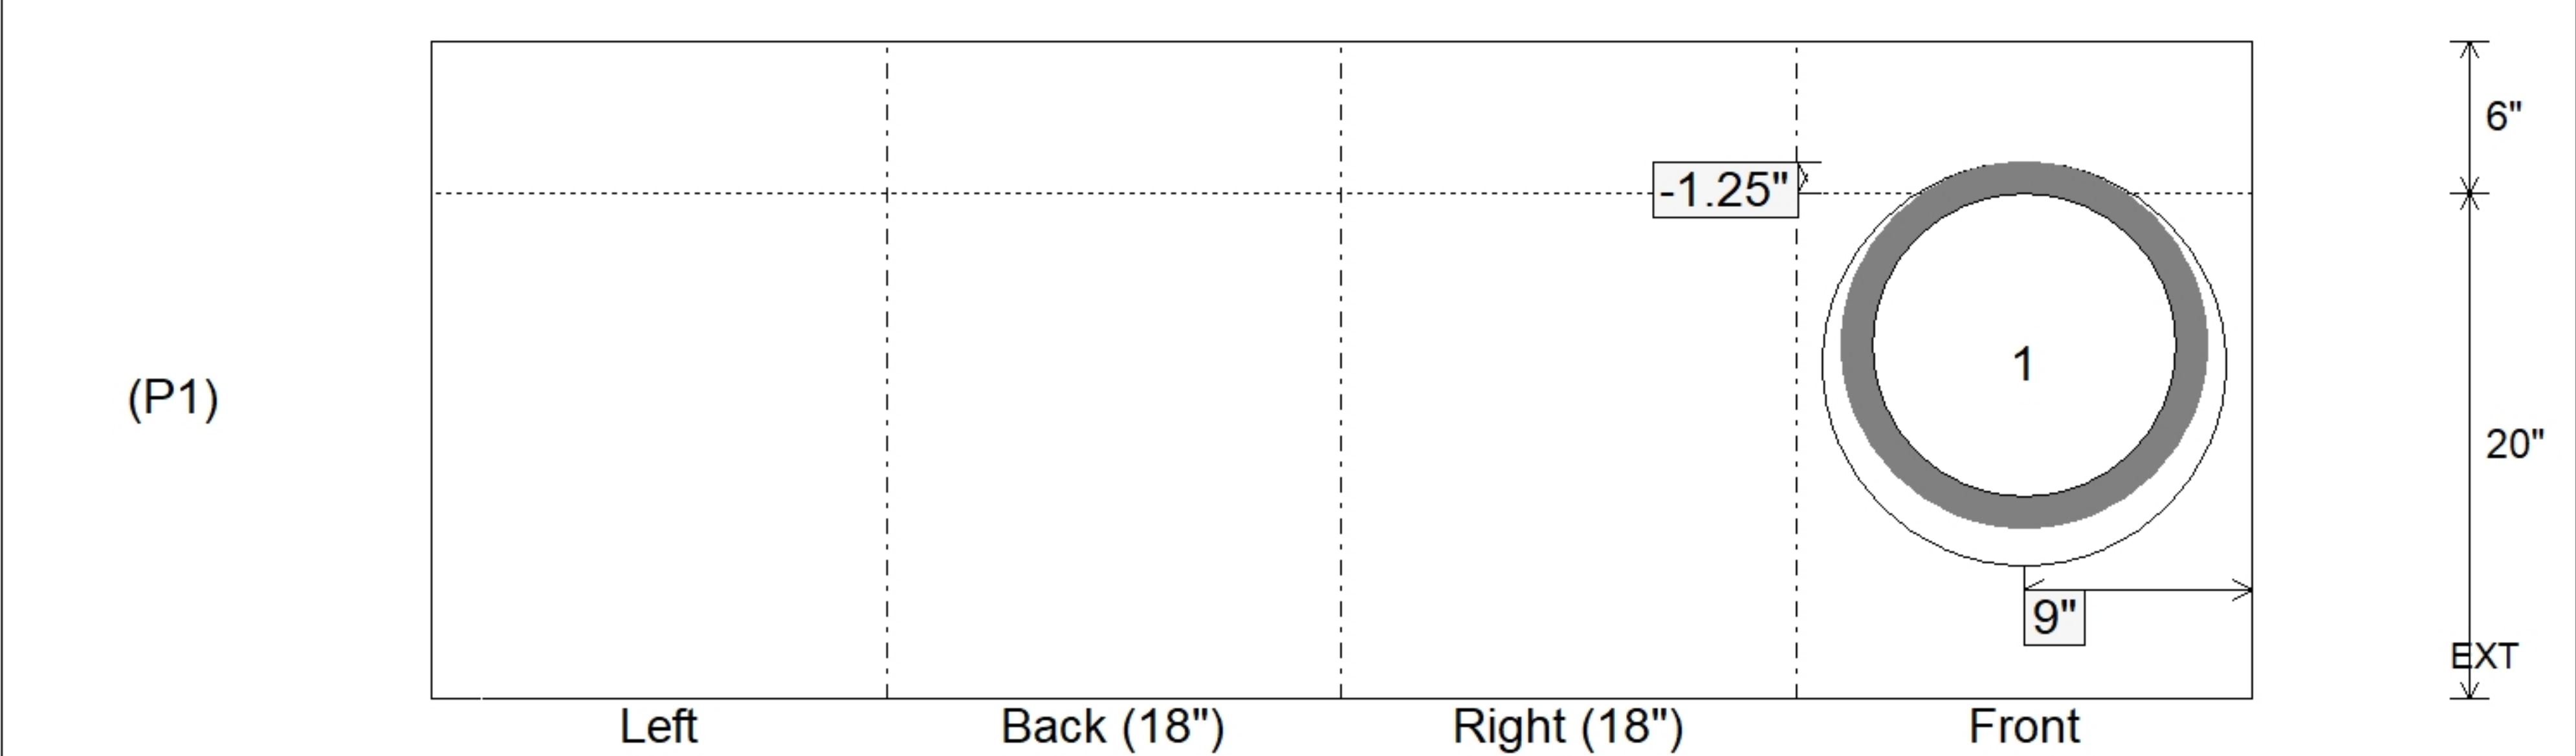

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 20" Height (Ext): 26"	Weight (Net): 1319 lb Volume (Net): 0.34cu.yd
----------------------------------	-------------------------------	--	--	--