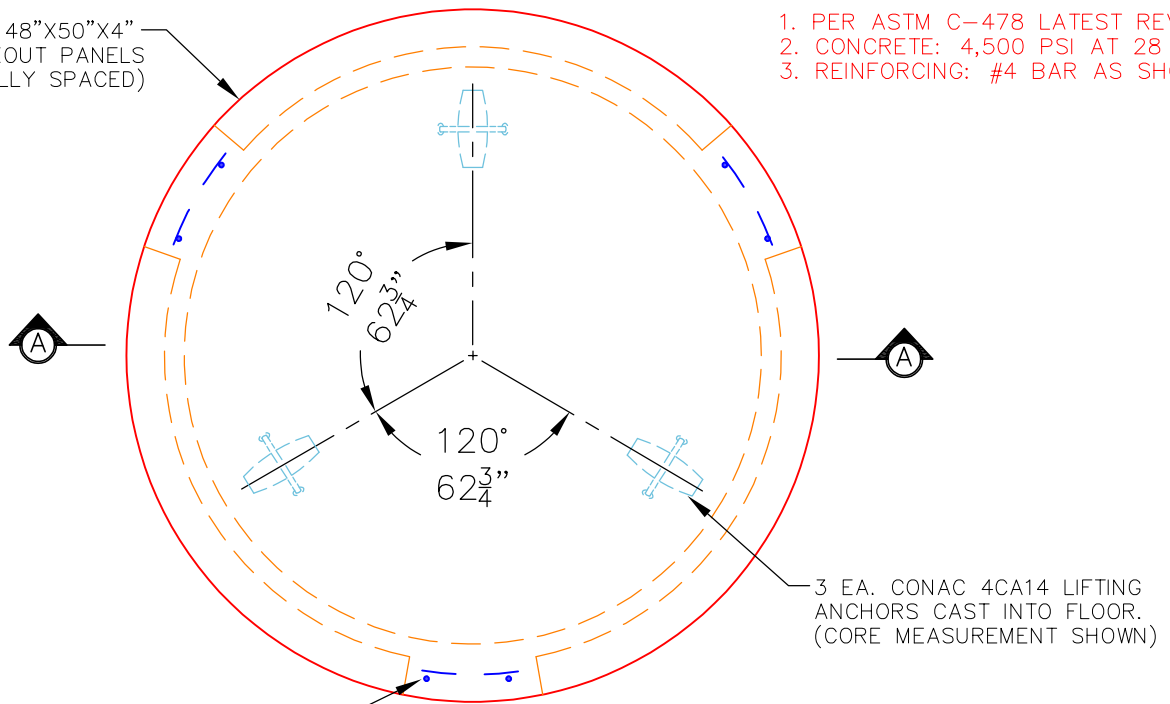


GENERAL NOTES:


1. PER ASTM C-478 LATEST REVISION.
2. CONCRETE: 4,500 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR AS SHOWN.

3 EA. 48"X50"X4"
KNOCKOUT PANELS
(EQUALLY SPACED)

**PLAN VIEW**

(UPSIDE-DOWN)

#4 BAR @ 12" C/C
E.W. MAT IN FLOOR W/
2-#4 VERTICAL BARS
TIED BETWEEN KO PANELS.

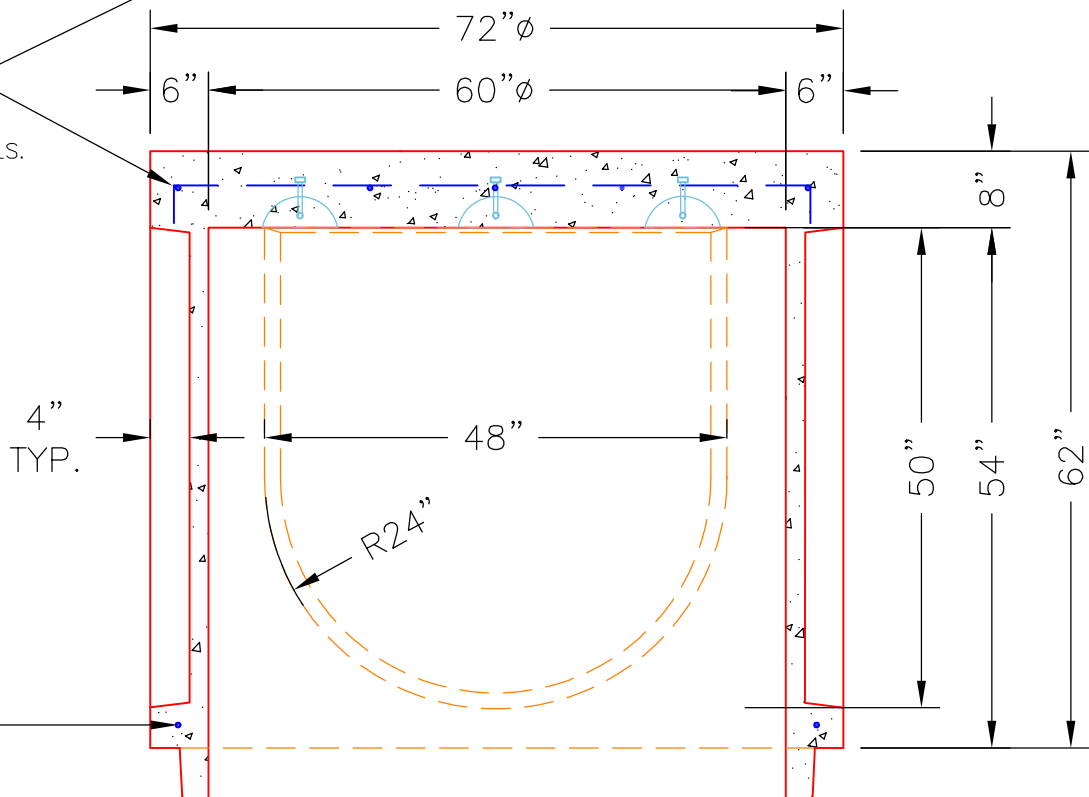

#4 BAR CIRCULAR BAR
TIED ABOVE PANELS.

SECTION A-A

(UPSIDE-DOWN)

PRODUCTION WORK ORDER

PRODUCT I.D.:
MH060BA54-KO

DESCRIPTION:
KNOCKOUT MANHOLE BASE 60"Ø X 54" TALL



QUALITY CONTROL CHECKLIST

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ KNOCKOUT PANELS CORRECT.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY OKAY.
- ☐ TONGUE INSTALLED.
- ☐ BASE CLEAN & FREE OF DEBRIS.

PRODUCT VIEW: UPSIDE-DOWN

PLANT: BEAVER DAM, KY.

WEIGHT: 6,090 LBS.

TOP JOINT: TONGUE

BOTTOM JOINT: N/A

QC CHECK INITIALS:

CUSTOMER: STOCK

PROJECT: STOCK

STRUCTURE ID.: N/A

SALES ORDER NO: N/A

CHK.: J.H. ROSS, PE

DRAWING: N. RICHARDS

DATE: 11/22/23

SCALE: NTS

PG. 1 of 1