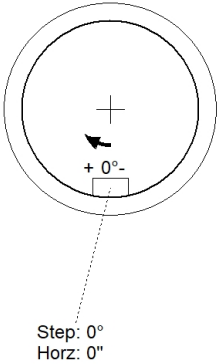



Job Name: 24-3432P3 - Sheperdsville CityPark Addition					Plant: 100		Tech: J. Horsley				
Job Location: Sheperdsville, KY					9/22/2026 12:27:15 PM		PC: A. Chamber				
Contractor: Yockum Trucking & Excavating											
Structure ID: Riser (60in x 12H)											
P1 MH060RS12			MH RISER T/G								
P1) 60" - MH RISER T/G - 12" 1) 60" - Conseal CS-102 1.00" 1) MH Step ML-10-TDS-NCR - 10"					1253 lb 0 lb 0 lb ----- Structure Total: 1253 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ? REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.. - RISER/WALLS (As .18) - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.				
Rim: 1'		Rim to Invert: 0'		Slack: 0"		Sump: 0"		Step Position: 0°			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions)											
Note: Use stock riser if available. 											
INSIDE WALL DIMENSIONS											
											
Coating (Int): Coating (Ext):				Seam Up: Tongue Seam Dn: Groove		Wall Thickness: 6" Floor Height: 0"		Height (Int): 12" Height (Ext): 12"		Weight (Net): 1253 lb Volume (Net): 0.32cu.yd	