

Job Name: 25-3292 Arbor View Sec. 2  
 Job Location: Eminence, KY  
 Contractor: Core & Main LP (Lou)

Plant: Beaver Dam

Tech: C.Russ

10/21/2025 9:21:18 AM

PC: J.Jarvis



**Structure ID: CBI-B6**

**P1 BX3636-08BAVF**

**BOX BASE 8inW, 8inF, Variable Ht F/n**

- P3) 24" x 36" - CASTING HEIGHT - 6"
- P2) 36" x 36" - CB FLAT TOP 8"W w/24"x36" HOLE F/F - 8"
- P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 43"
- 1) CASTING - HOE 525 LV SET (F/G/H)
- 1) 36" x 36" - SGL 1"x14.5' Butyl (2x)
- 3) Hole - 24"

0 lb  
 1235 lb  
 5965 lb  
 442 lb  
 0 lb  
 0 lb  
 -----  
 Structure Total: 7642 lb




- Structure Notes:**
1. PER ASTM C913 SPECIFICATIONS.
  2. CONCRETE = 4,000 PSI AT 28 DAYS.
  3. NO INVERT CHANNEL.
  4. HOE 525 BY ICAST
  5. REINFORCING PER ASTM A615 (GRADE 60).  
 - WALLS (As .12) #5 BARS AT 12" C.C.E.W.  
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 900.08' Rim to Invert: 4.75' Slack: 0" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	895.33'	200°	28.625"	18" HDPE	21.2"	Hole 24	24"	25.54"	-1.625"	-6.479"
Invert 2	895.43'	0°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-0.375"	0"
Invert 3	895.43'	270°	26"	18" HDPE	21.2"	Hole 24	24"	24"	-0.375"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

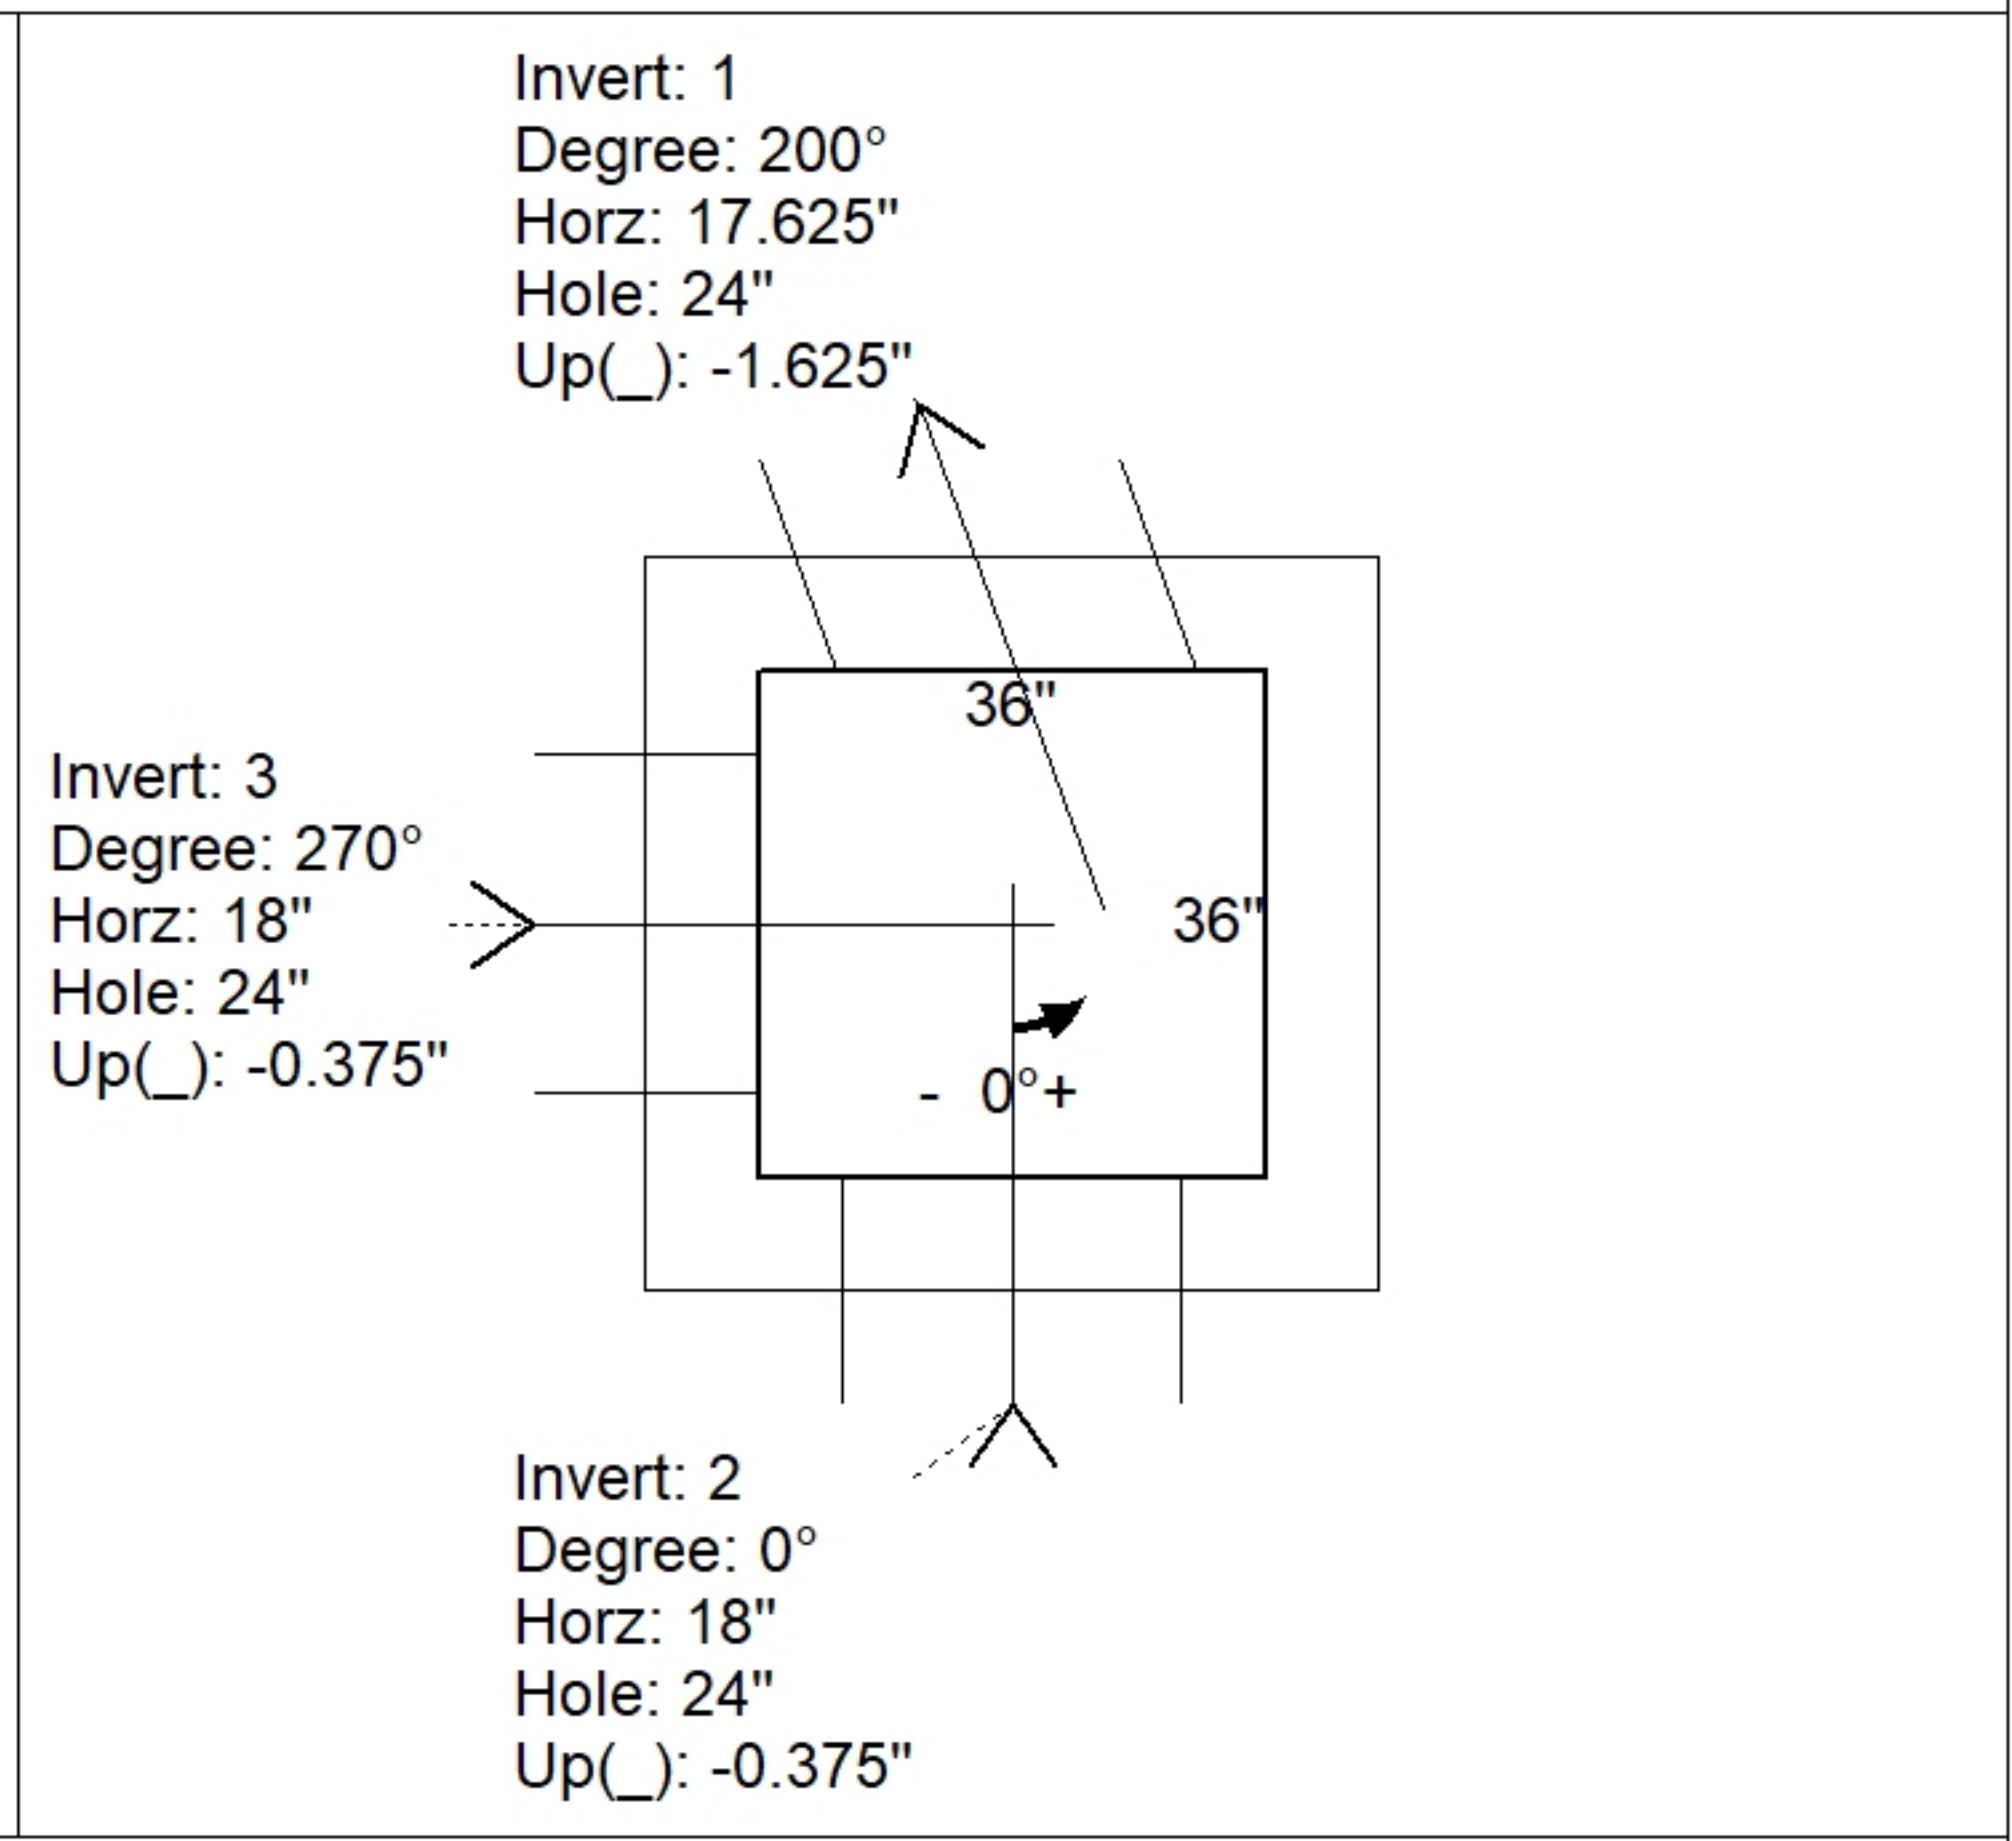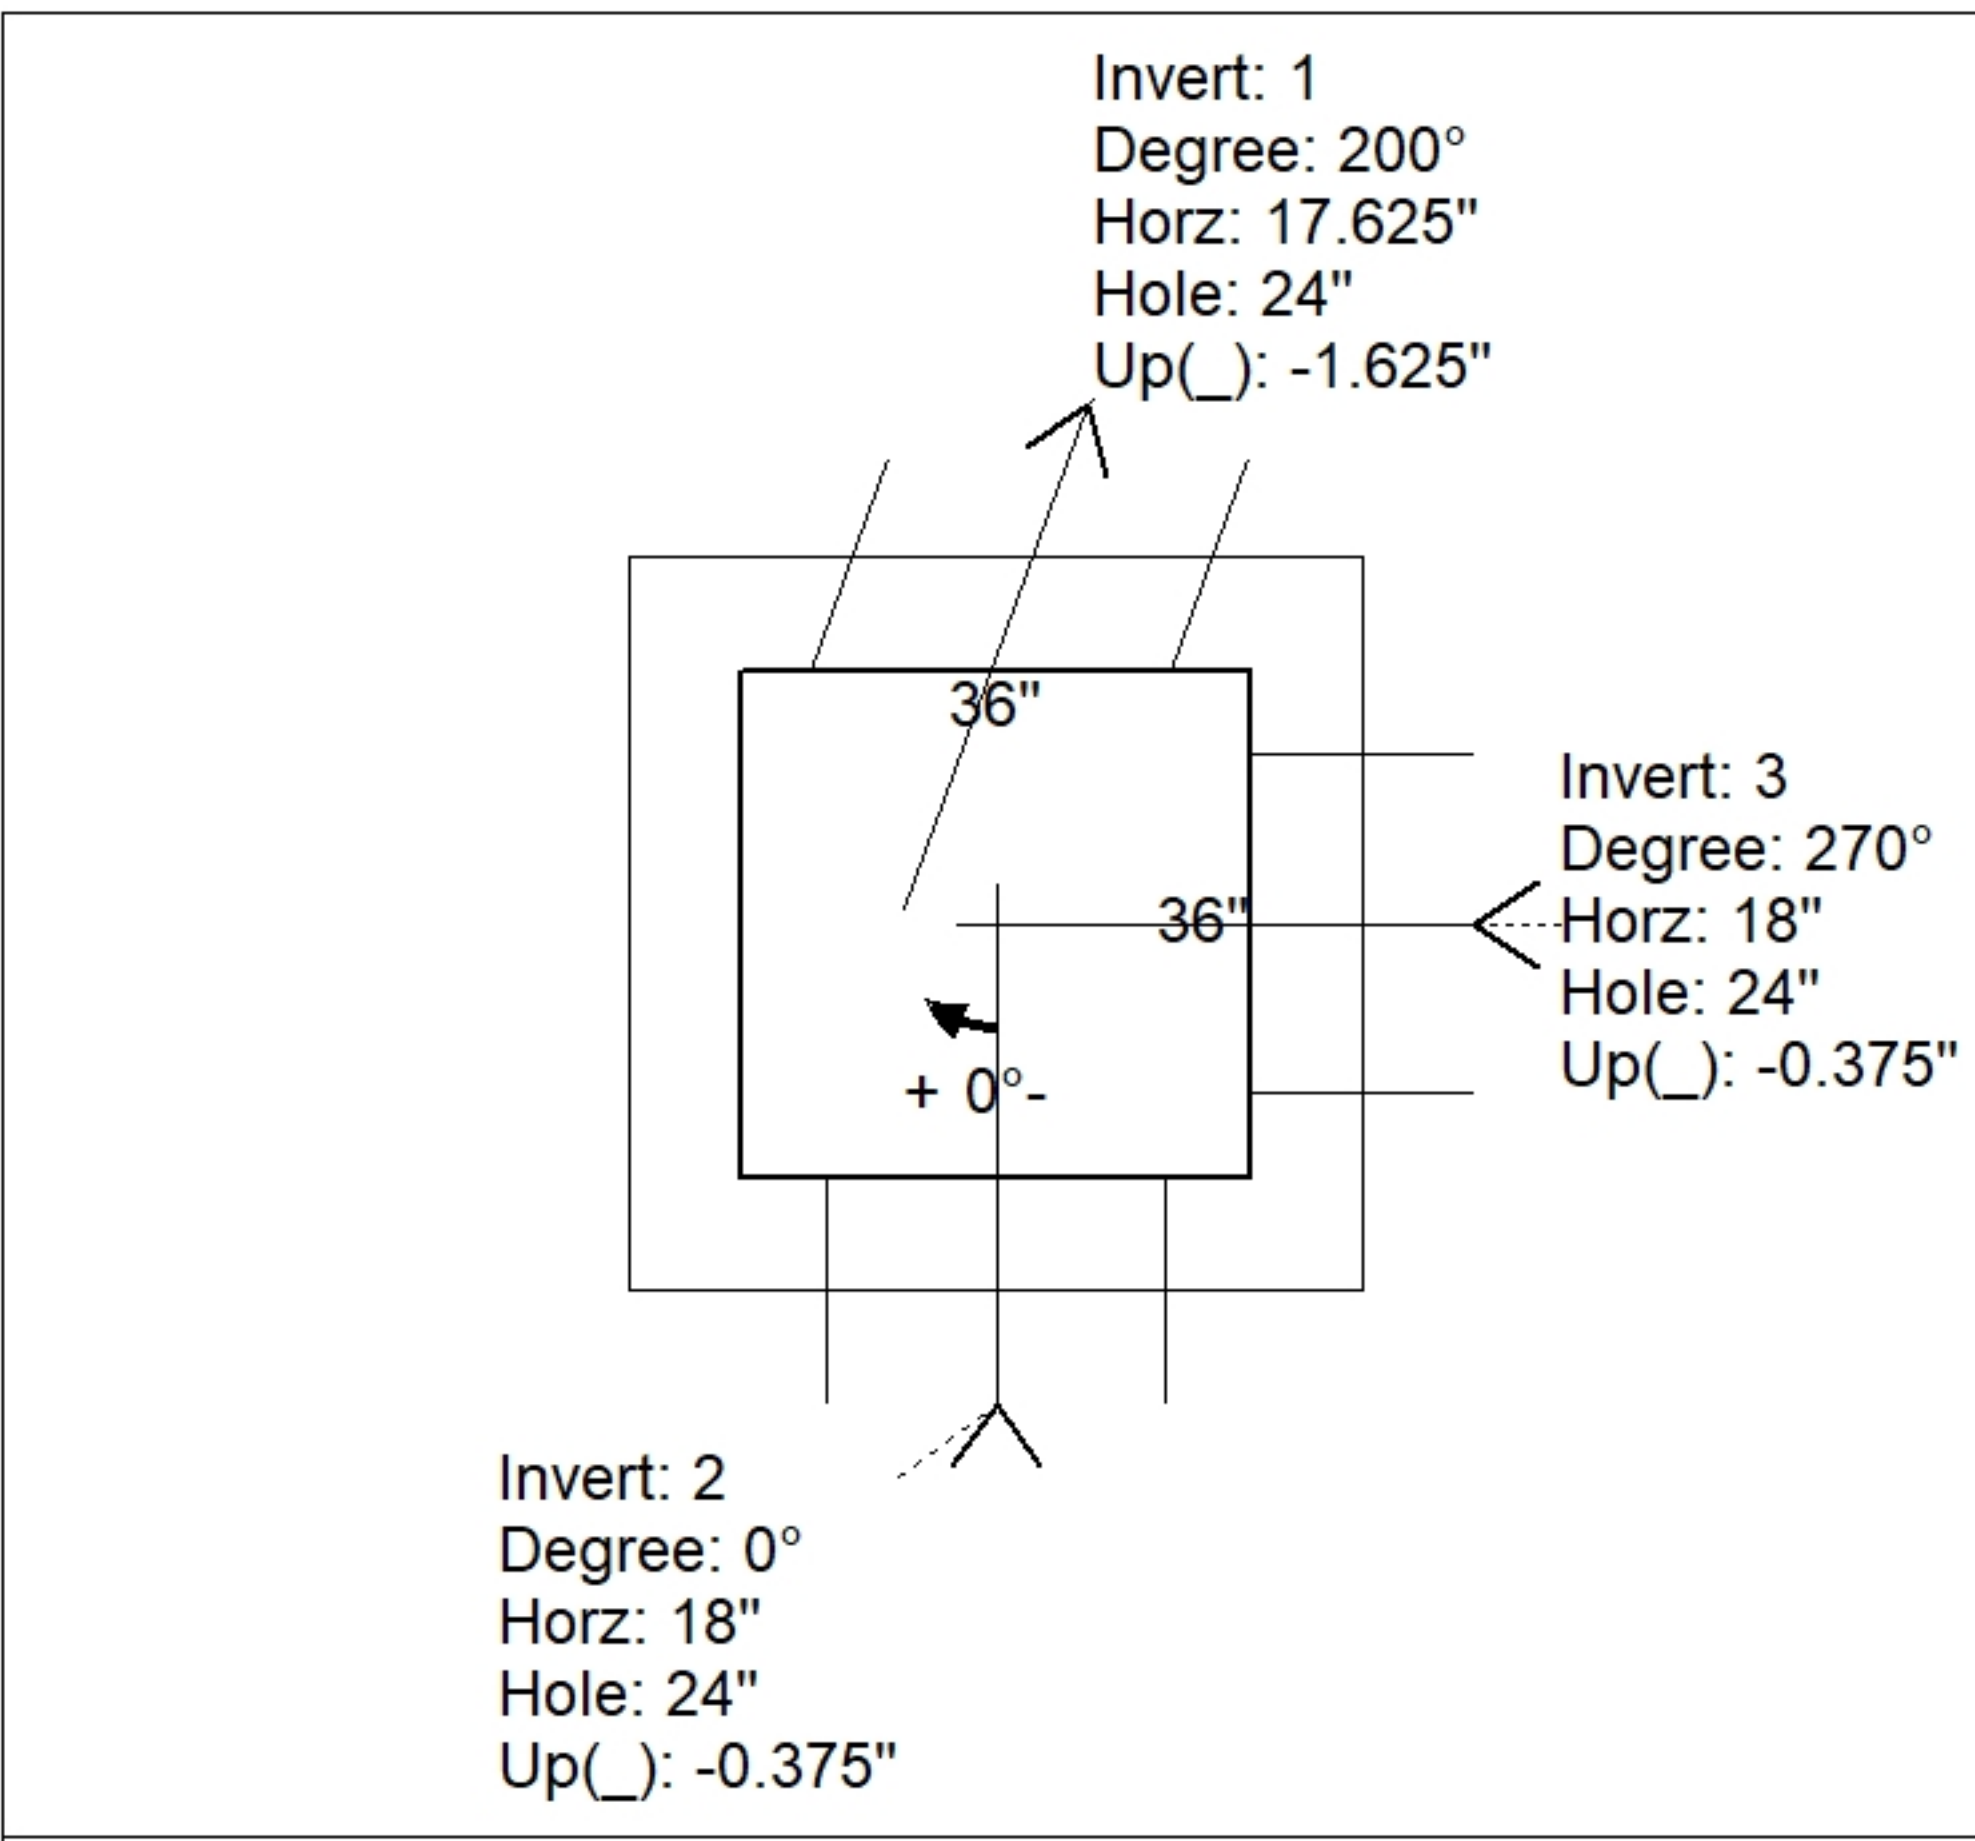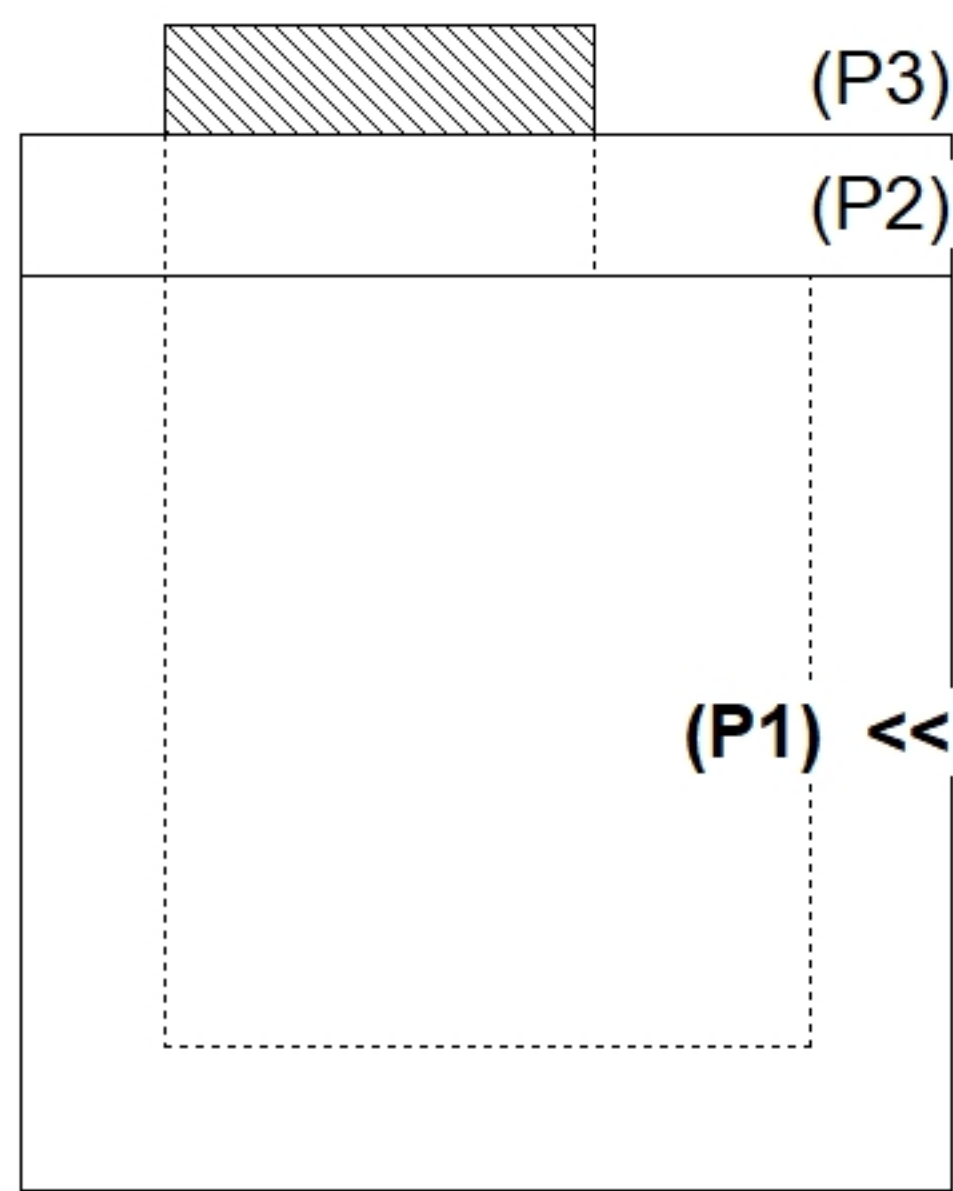

INSIDE WALL DIMENSIONS

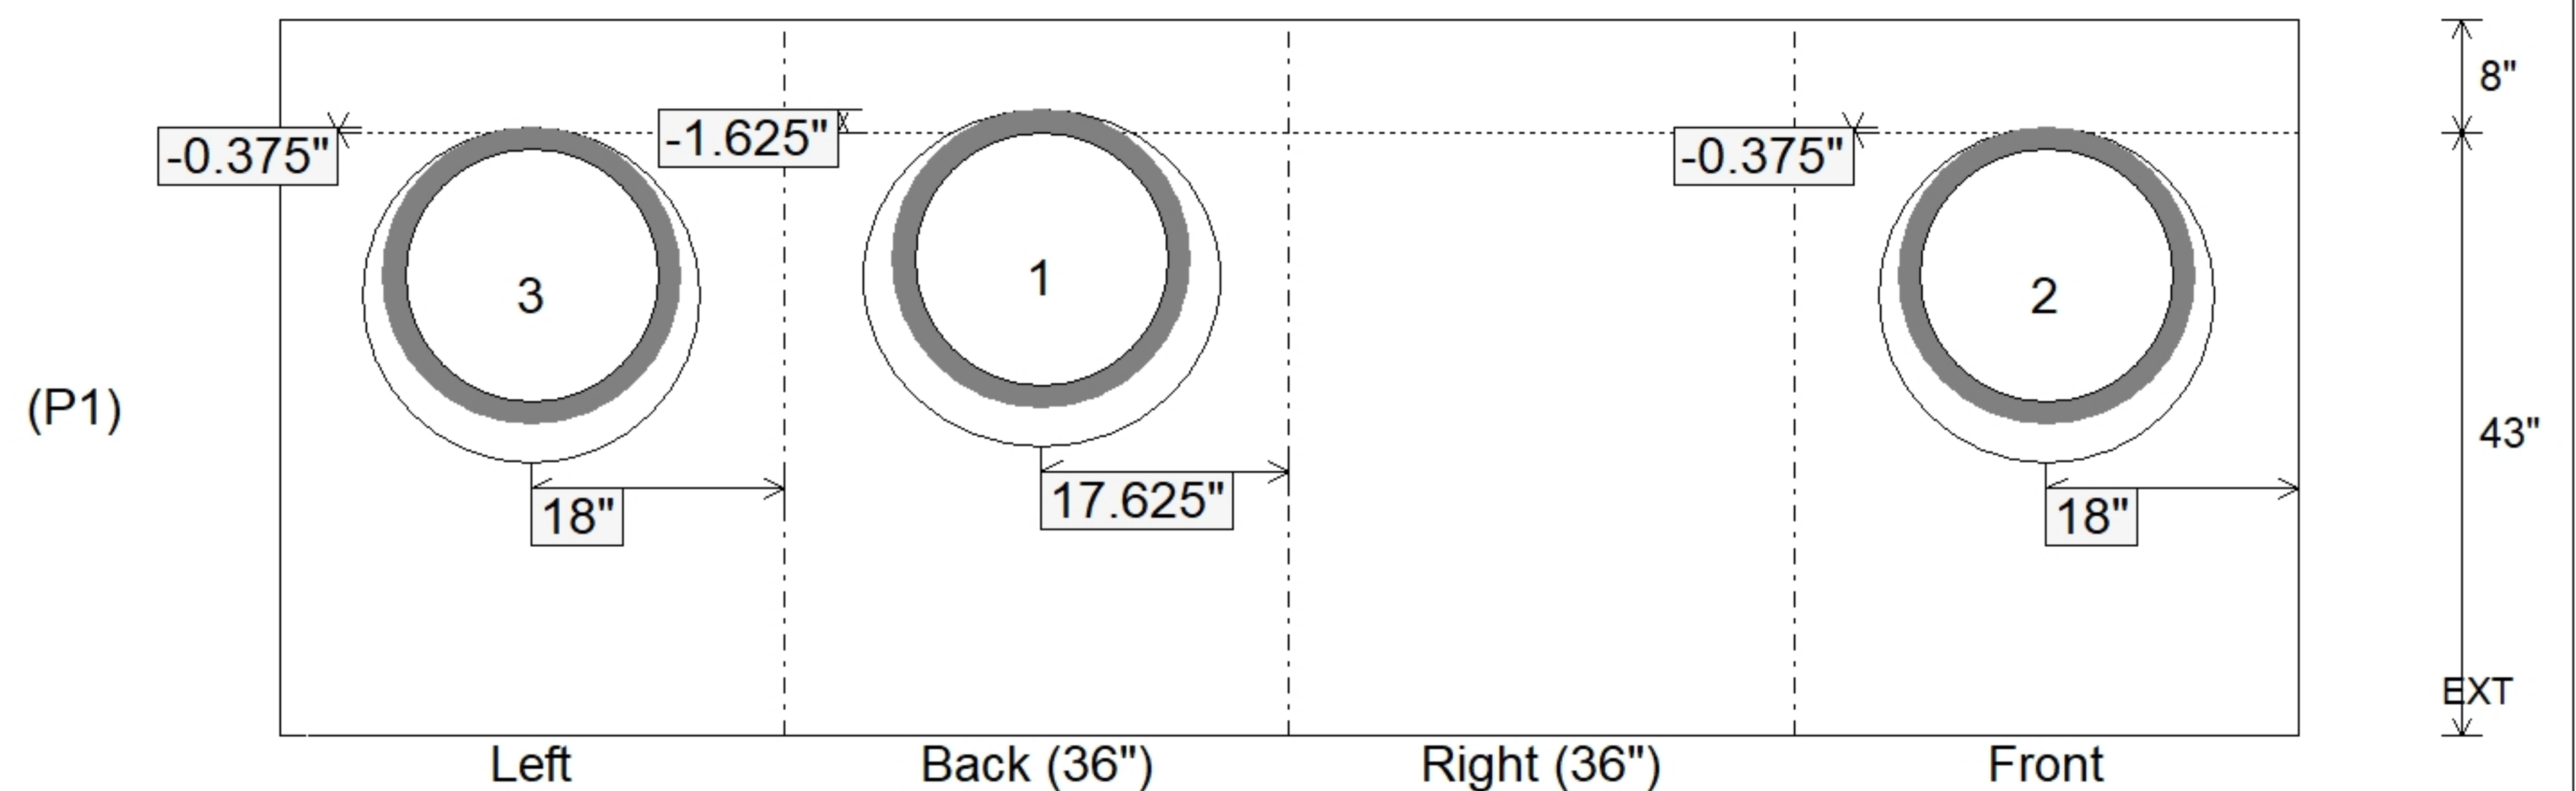

Coating (Int):  
 Coating (Ext):

Seam Up: Flat  
 Seam Dn: n/a

Wall Thickness: 8"  
 Floor Height: 8"

Height (Int): 43"  
 Height (Ext): 51"

Weight (Net): 5965 lb  
 Volume (Net): 1.52cu.yd