


THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

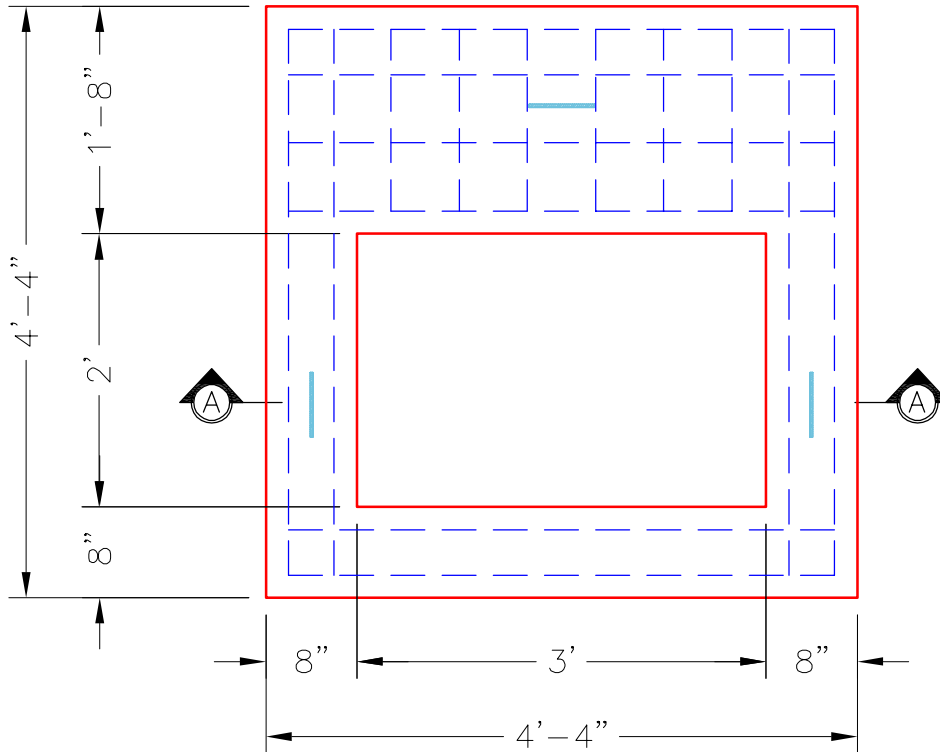


PLAN VIEW

24" X 36" OPENING
OFFSET IN SLAB

3 EA. CONAC 1.6 TON
WIRE ROPE ANCHORS
REQUIRED—MINIMUM.

#5 BAR @ 4" C/C TYP.

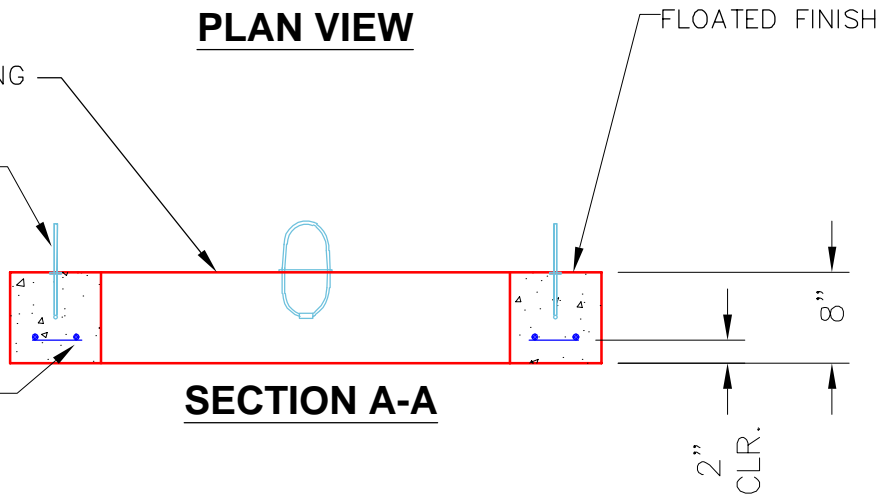

SECTION A-A

NOTES:

- CONCRETE: 4500 PSI @ 28 DAYS.
- REINFORCING: #5 BAR @ 4" & 6" C/C—GRADE 60.
- 3 EA. CONAC WIRE LOOP LIFTERS REQUIRED.

<p>PRODUCTION WORK ORDER</p>		<p>PRODUCT I.D.: BX3636_08LD08</p>	<p>DESCRIPTION: TOP SLAB 36"X36"X 8" W/ 24"X36" OPENING</p>	
	<p>QUALITY CONTROL CHECKLIST</p>		<p>CUSTOMER: CORE & MAIN LP (LOU)</p>	
	<input type="checkbox"/> ALL DIMENSIONS CORRECT.		<p>PLANT: BEAVER DAM, KY.</p>	
	<input type="checkbox"/> LIFTERS INSTALLED.		<p>PROJECT: ARBOR VIEW SEC. 2</p>	
	<input type="checkbox"/> OPENING OFFSET.		<p>STRUCTURE: CBI-B6</p>	
	<input type="checkbox"/> REINFORCING CORRECT.		<p>JOB NUMBER: 25-3292</p>	
<input type="checkbox"/> SHIP-LAP TONGUE INSTALLED.		<p>PC: J.H. ROSS, PE</p>		
<input type="checkbox"/> EDGES CHAMFERED.		<p>DRAWING: C. RUSS</p>		
<input type="checkbox"/> ANY PATCHWORK ACCEPTABLE.		<p>DATE: 10/13/25</p>		
<p>QC CHECK INITIALS:</p>		<p>SCALE: NTS</p>		
		<p>PG. 1 of 1</p>		