


Job Name: 25-3303 INDOT B44119-A ORX-Sect. 3 - Vanderburgh Co.	Plant: 100	Tech: J. Horsley	
Job Location: Evansville, IN Contractor: Blankenberger Brothers, Inc.	10/21/2025 7:34:45 PM	PC: A. Chambers	

Structure ID: 110 (4242+59)



P4 MH048CN30

ECC CONE w/ 24" HOLE F/G

P5) 24" - CASTING HEIGHT - 7"	0 lb
P4) 48" - ECC CONE w/ 24" HOLE F/G - 30"	2050 lb
P3) 48" - MH RISER T/G - 24"	1677 lb
P2) 60" - MH Transition Slab 48" Hole T/G - 13"	1928 lb
P1) 60" - MH BASE T/n - 72"	9780 lb
1) CASTING - EJ 1925 F/C	250 lb
1) 60" - SGL 1"x14.5" Butyl (2x)	0 lb
2) 48" - SGL 1"x14.5" Butyl (2x)	0 lb
2) Hole - 22	0 lb
2) Hole - 10	0 lb
11) MH Step ML-10-TDS-NCR - 10"	0 lb
Structure Total:	15684 lb

Structure Notes:
****INDOT STATE PROJECT****
 1. INDOT MH TYPE C / ASTM C478 SPEC'S.
 2. CONCRETE = 4,000 PSI AT 28 DAYS.
 3. NO INVERT CHANNEL.
 4. CASTING BY ICAST (INDOTY TY.4/ EJ 1925 F/C)

REINFORCING PER ASTM A615 (GRADE 60).
 - CONE (As .12)
 - RISER/WALLS (As .12)
 - FLOOR (As .62) #5 BARS AT 6" C.C.E.W.

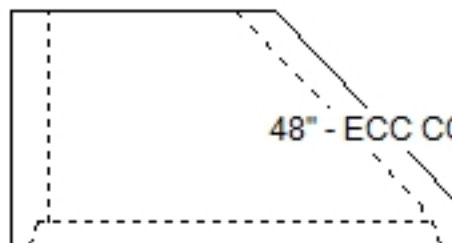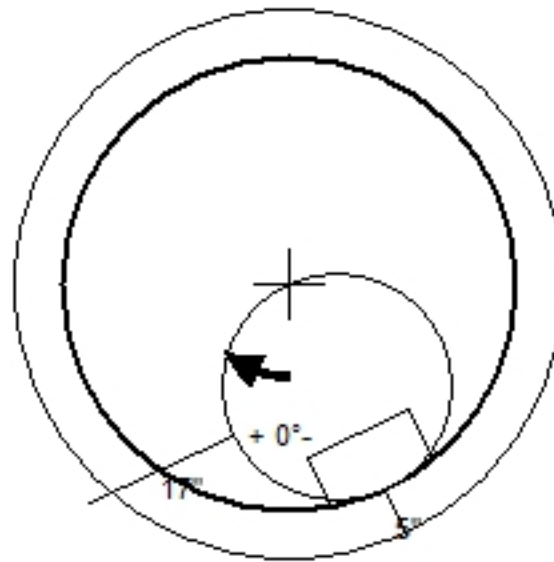

48" - ECC CONE w/ 24" HOLE F/G - 30" - (P4)

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 2050 lb Volume (Net): 0.41cu.yd
----------------------------------	----------------------------------	--------------------	-------------------	--