

Job Name: 25-3304 - Vuteq Warehouse Expansion
 Job Location: Georgetown, KY
 Contractor: Brown General Contractors

Plant: 100

3/19/2026 11:40:31 AM

Tech: Jared - A

PC: Erica Bradley



Structure ID: ST-6

P1 MH060BA60

MH BASE T/n

- P6) 24" - CASTING HEIGHT - 7"
- P5) 48" - ECC CONE w/ 24" HOLE F/G - 36"
- P4) 48" - MH RISER T/G - 60"
- P3) 60" - MH Transition Slab 48" Hole T/G - 15"
- P2) 60" - MH RISER SPECIAL T/G - 72"
- P1) 60" - MH BASE T/n - 60"
- 1) CASTING - HOE MC-315 F/C Storm
- 2) 60" - Conseal CS-102 1.00"
- 2) 48" - Conseal CS-102 1.00"
- 2) Hole - 40
- 19) MH Step ML-10-TDS-NCR - 10"

0 lb
 3000 lb
 4192 lb
 2204 lb
 6835 lb
 8315 lb
 258 lb
 0 lb
 0 lb
 0 lb
 0 lb
 0 lb

 24803 lb

- Structure Notes:**
1. PER ASTM C-478 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: PER ASTM A615
 4. NO STORM INVERT
 5. STEPS AT 233.5 DEGREES
 6. HOE MC-315 FRAME & COVER "STORM" SUPPLIED BY ICAST




Structure Total: 24803 lb

Rim: 919.21' Rim to Invert: 20.73' Slack: 2.26" Sump: 3.5" Step Position: 233.5°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	898.48'	0°	0"	30" RCP B WALL	37"	Hole 40	40"	43.784"	0"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

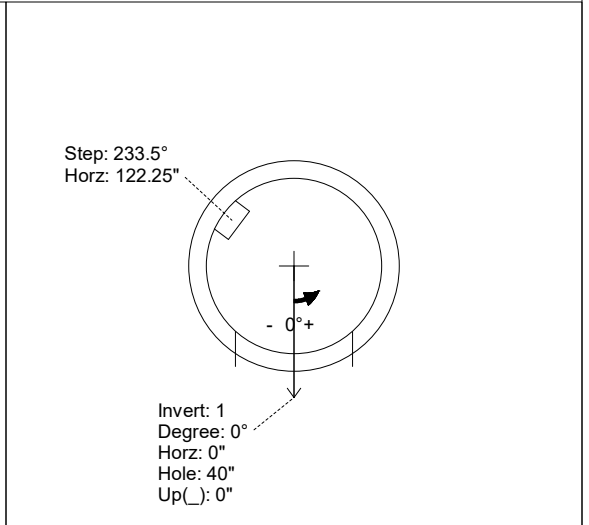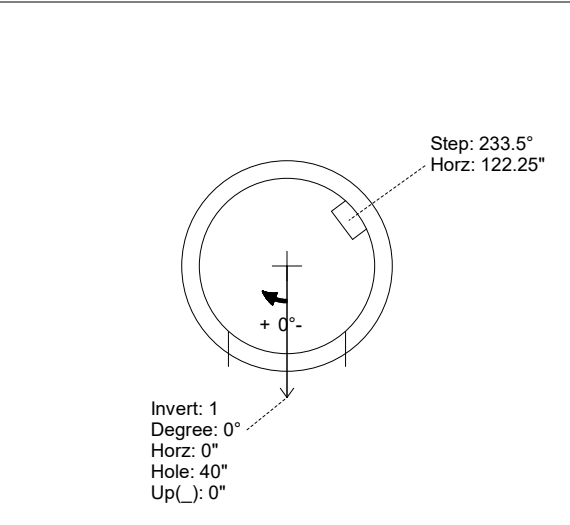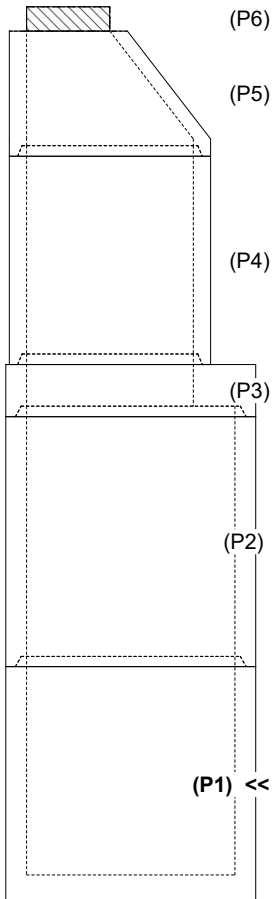

INSIDE WALL DIMENSIONS

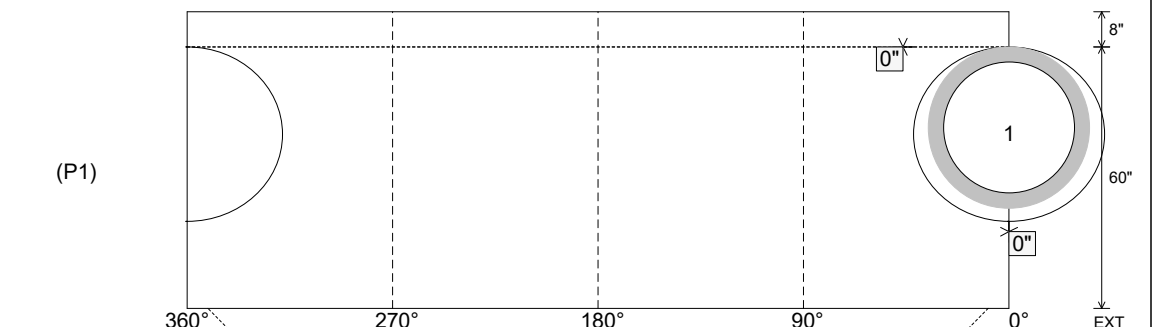

Coating (Int):
 Coating (Ext):

Seam Up: Tongue
 Seam Dn: n/a

Wall Thickness: 6"
 Floor Height: 8"

Height (Int): 60"
 Height (Ext): 68"

Weight (Net): 8315 lb
 Volume (Net): 2.12cu.yd