

Job Name: 25-3334 Hickory Industrial Park
 Job Location: Hickory, KY
 Contractor: Crider Paving & Excavating

Plant: Beaver Dam

11/17/2025 11:38:14 AM

Tech: C.Russ

PC: E.Bradley



Structure ID: SSMH-A1

P2 MH048CN30

ECC CONE w/ 24" HOLE



- P3) 24" - CASTING HEIGHT - 7"
- P2) 48" - ECC CONE w/ 24" HOLE - 30"
- P1) 48" - MH BASE - 24"
- 1) 48" - MH INVERT CHANNEL - FULL HEIGHT
- 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
- 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
- 1) 48" - Conseal CS-102 1.00" (Double)
- 1) PSX - 12-08 NYLO
- 4) MH Step ML-10-TDS-NCR - 10"
- 70.39 SqFt) Carboline Bitumastic 300M [EXT]

- 0 lb
- 2050 lb
- 2959 lb
- 1440 lb
- 0 lb
- 0 lb
- 0 lb
- 8 lb
- 0 lb
- 0 lb
-
- 6457 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. HOE MC-375 F/C "SANITARY" BY ICAST
4. REINFORCING PER ASTM A615 (GRADE 60).
 - CONE (As .12)
 - RISER/WALLS (As .12)
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
5. STRUCTURE TO HAVE TWO EXTERIOR COATS OF CARBOLINE 300M.

Structure Total:

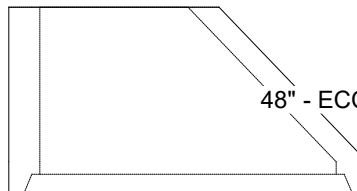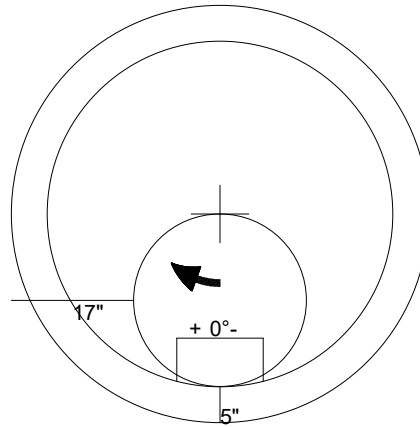

48" - ECC CONE w/ 24" HOLE - 30" - (P2)

Coating (Int):
 Coating (Ext): Carboline Bitumastic 300M

Seam Up: Flat
 Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 30"

Weight (Net): 2050 lb
 Volume (Net): 0.41cu.yd