

Structure ID: INL 9

P1 BX24240606VF

BOX BASE 6inW, 6inF, Variable Ht F/n

- P2) 24" x 24" - CASTING HEIGHT - 6"
- P1) 24" x 24" - BOX BASE 6inW, 6inF, Variable Ht F/n - 39"
- 1) CASTING - HOE 342 F/G
- 1) 24" x 24" - Conseal CS-102 1.00"
- 1) Hole - 20
- 1) Hole - 10
- 1) Hole - 8

0 lb
 2786 lb
 250 lb
 0 lb
 0 lb
 0 lb
 0 lb

 Structure Total: 3036 lb



- Structure Notes:
1. PER ASTM C-913 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
 4. NO STORM INVERT
 5. NO STEPS
 6. HOE 342-B FRAME & GRATE SUPPLIED BY ICAST

Rim: 540.4' Rim to Invert: 3.65' Slack: 0.05" Sump: 1.25" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	536.75'	0°	18"	15" HDPE	17.6"	Hole 20	20"	20"	0"	0"
Invert 2	536.75'	90°	18"	8" PVC SCH40	8.625"	Hole 10	10"	10"	0.875"	0"
Invert 3	538.9'	180°	18"	6" HDPE (perf pipe)	6.9"	Hole 8	8"	8"	26.625"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

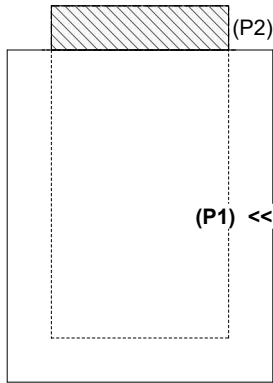

INSIDE WALL DIMENSIONS

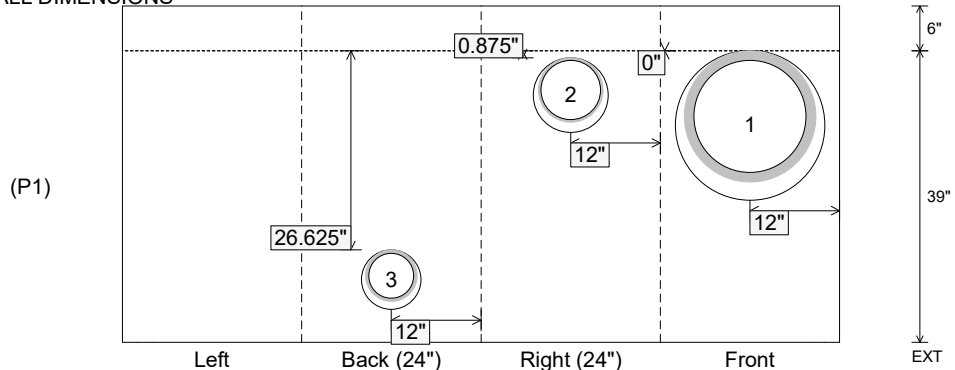

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 6" Floor Height: 6"	Height (Int): 39" Height (Ext): 45"	Weight (Net): 2786 lb Volume (Net): 0.71cu.yd
----------------------------------	-------------------------------	--	--	--