

Job Name: 25-3442 - Take 5
Job Location: Newburgh, IN 47630
Contractor: Stemaly Excavating Inc.

PC: Trevor Lewis
 TECH: J. Horsley - A
 Plant: Beaver Dam, KY



Structure ID: 9
 Spec: Storm
 Type: BX 8inW, 8inF
 Size: 24" x 36"

Rim: 394.05'
 Invert: 390.55'
 Rim to Invert: 3.5'

Sump: 1.25"
 Floor (Top): 390.446'
 Floor Height: 8"


Floor (Bot): 389.779'
 Overall Height: 4.25'
 Slack: 0.25"

- Structure Notes:**
 PLAN LABEL: 9
 1. PER ASTM C-913 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60)
 4. NO STORM INVERT
 5. NO STEPS
 6. HOE 518 FRAME & GRATE SUPPLIED BY ICAST


STRUCTURE SUMMARY:

P2) 24" x 36" - CASTING HEIGHT - 4"	0 lb
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 39"	5051 lb
1) CASTING - HOE 518 F/G	354 lb
1) 24" x 36" - Conseal CS-102 1.00"	0 lb
1) Hole - 18	0 lb
1) Hole - 16	0 lb
1) Hole - 6	0 lb


Structure Total:	5405 lb

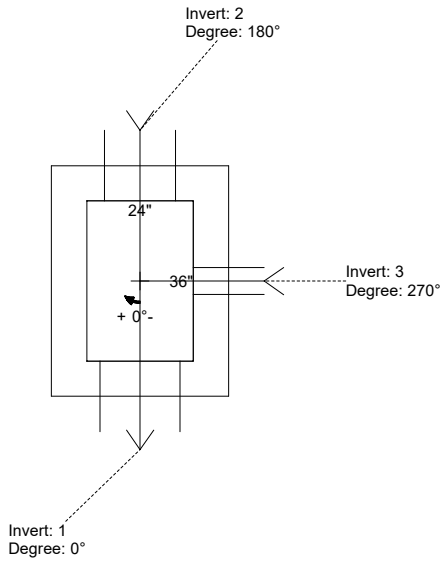

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (L)	Ref
Rim	394.05'							
Reducer								
Invert 1	390.55'	0°	12" HDPE	14.5"	18"	Hole 18	0"	P1
Invert 2	390.55'	180°	12" HDPE	14.5"	16"	Hole 16	0"	P1
Invert 3	390.65'	270°	4" HDPE (perf pipe)	4.8"	6"	Hole 6	2"	P1
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

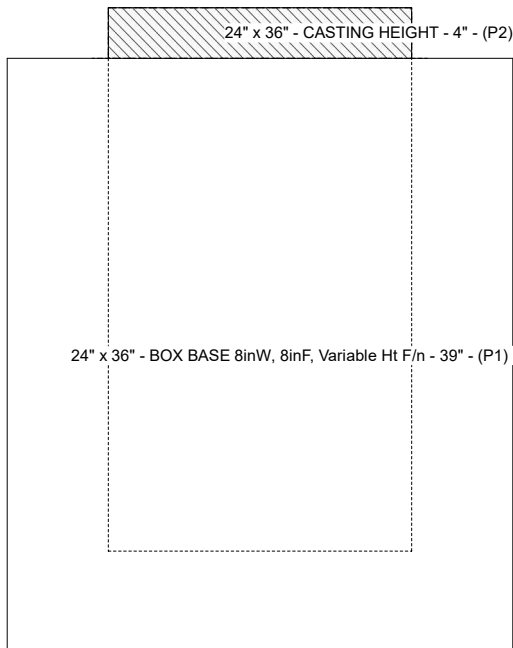

Cast (Int. Dim.) - Interior Dimensions

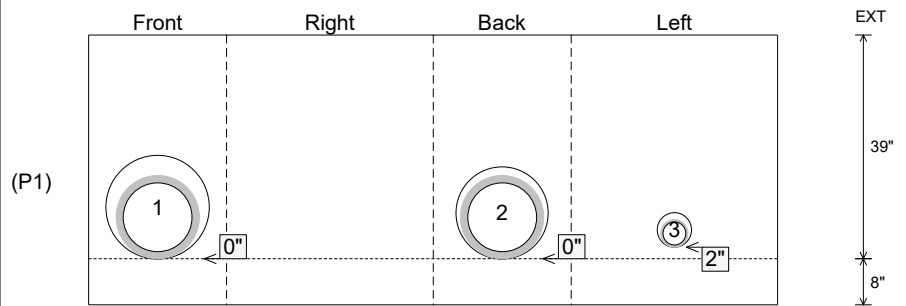

Submittal Drawing
 2/22/2026 3:21:17 PM

SUBMITTAL
 APPROVED BY: