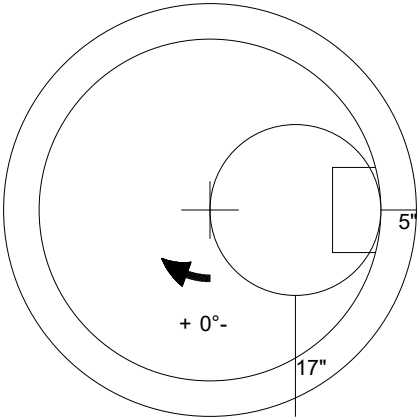



Job Name: 25-3452 - Churchill Downs Skye Terrace Improvements		Plant: 100		Tech: Jared - F		
Job Location: Louisville, KY 40208		4/30/2026 1:22:59 PM		PC: J. Jarvis		
Contractor: Louisville Paving and Construction						
Structure ID: S112						
P2 MH048CN36		ECC CONE w/ 24" HOLE F/G				
P3) 24" - CASTING HEIGHT - 7" P2) 48" - ECC CONE w/ 24" HOLE F/G - 36" P1) 48" - MH BASE Custom Ht T/n - 56" 1) CASTING - HOE MC-420 F/C Storm 1) 48" - Conseal CS-102 1.00" 2) Hole - 24 8) MH Step ML-10-TDS-NCR - 10"		0 lb 3000 lb 4848 lb 340 lb 0 lb 0 lb 0 lb ----- 8188 lb		<u>Structure Notes:</u> 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE MC-420 F/C STORM) REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
						
 48" - ECC CONE w/ 24" HOLE F/G - 36" - (P2)						
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove		Wall Thickness: 5"		Height (Ext): 36"
						Weight (Net): 3000 lb Volume (Net): 0.5cu.yd