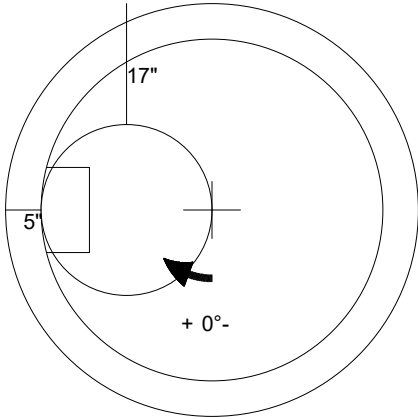
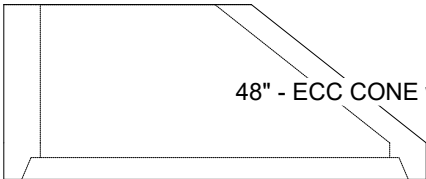


Job Name: 25-3452 - Churchill Downs Skye Terrace Improvements		Plant: 100	Tech: Jared - F	
Job Location: Louisville, KY 40208		4/30/2026 1:22:59 PM	PC: J. Jarvis	
Contractor: Louisville Paving and Construction				
Structure ID: S113				
P3 MH048CN24		ECC CONE w/ 24" HOLE F/G		
P4) 24" - CASTING HEIGHT - 7" P3) 48" - ECC CONE w/ 24" HOLE F/G - 24" P2) 48" - MH RISER T/G - 36" P1) 48" - MH BASE Custom Ht T/n - 32" 1) CASTING - HOE MC-420 F/C Storm 2) 48" - Conseal CS-102 1.00" 2) Hole - 24 1) Hole - 10 8) MH Step ML-10-TDS-NCR - 10"		0 lb 1550 lb 2482 lb 3171 lb 340 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 7543 lb	<u>Structure Notes:</u> 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE MC-420 F/C STORM) REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 24"	Weight (Net): 1550 lb Volume (Net): 0.33cu.yd