

Job Name: 25-3452 - Churchill Downs Skye Terrace Improvements
Job Location: Louisville, KY 40208
Contractor: Louisville Paving and Construction

Plant: 100

4/30/2026 1:23:05 PM

Tech: Jared - F

PC: J. Jarvis



Structure ID: S303

P3 MH048CN36

ECC CONE w/ 24" HOLE F/G

P4) 24" - CASTING HEIGHT - 7"
P3) 48" - ECC CONE w/ 24" HOLE F/G - 36"
P2) 48" - MH RISER T/G - 36"
P1) 48" - MH BASE Custom Ht T/n - 51"
1) CASTING - HOE MC-420 F/C Storm
2) 48" - Conseal CS-102 1.00"
2) Hole - 14
10) MH Step ML-10-TDS-NCR - 10"

0 lb
3000 lb
2515 lb
4762 lb
340 lb
0 lb
0 lb
0 lb



10617 lb

Structure Total:

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO INVERT CHANNEL.
4. CASTING BY ICAST (HOE MC-420 F/C STORM)

REINFORCING PER ASTM A615 (GRADE 60).
- CONE (As .12)
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

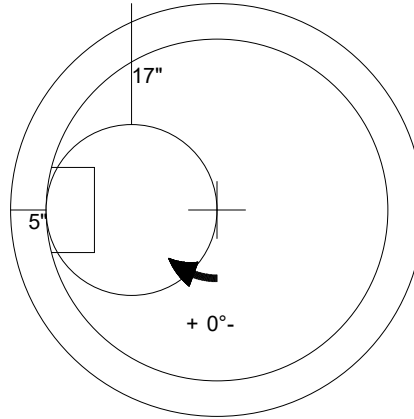

48" - ECC CONE w/ 24" HOLE F/G - 36" - (P3)

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 36"

Weight (Net): 3000 lb
Volume (Net): 0.5cu.yd