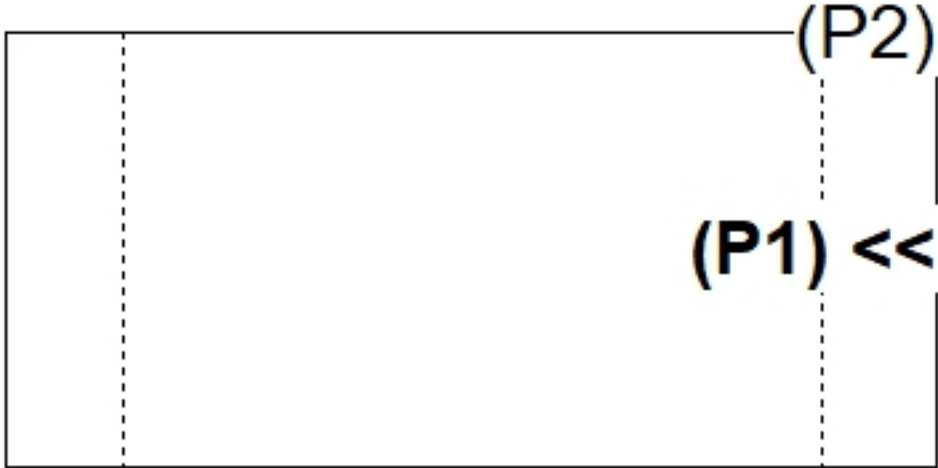
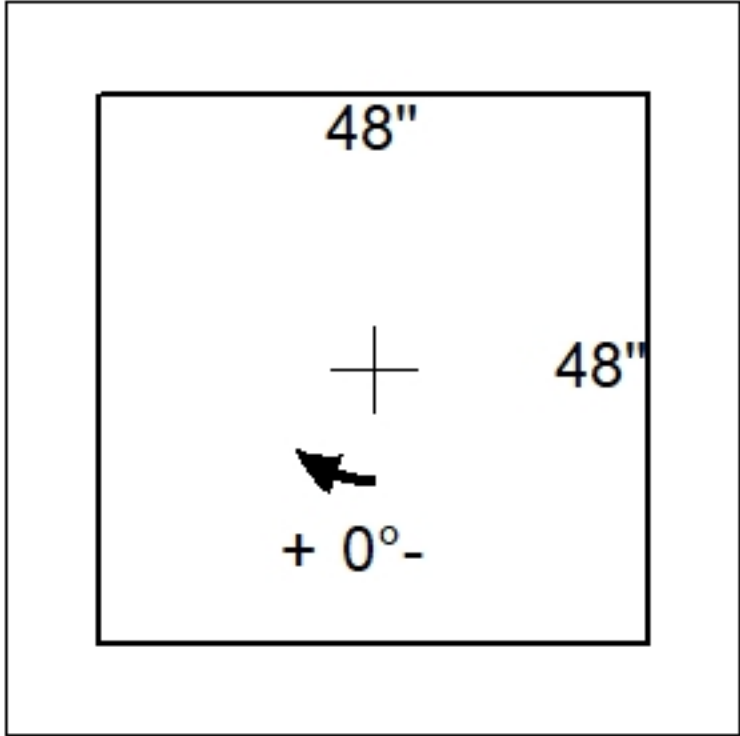
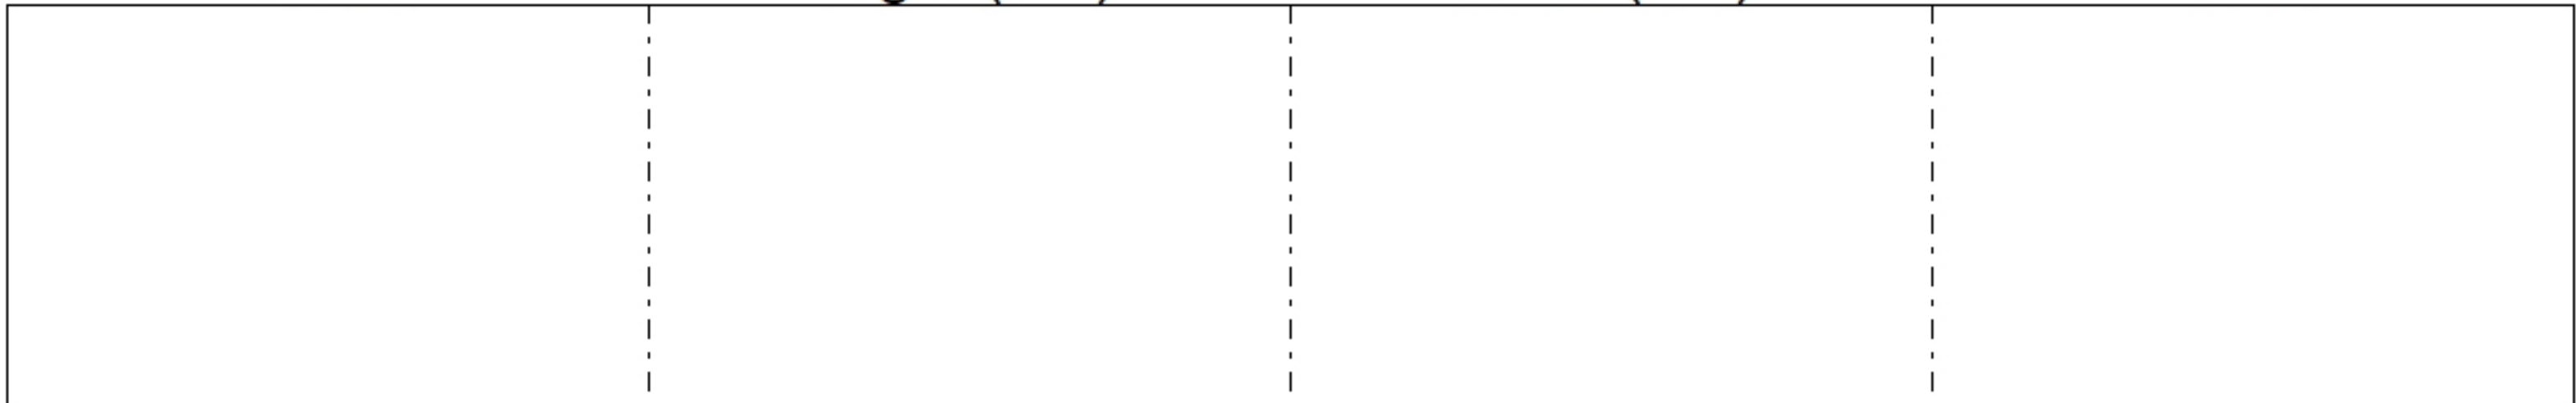
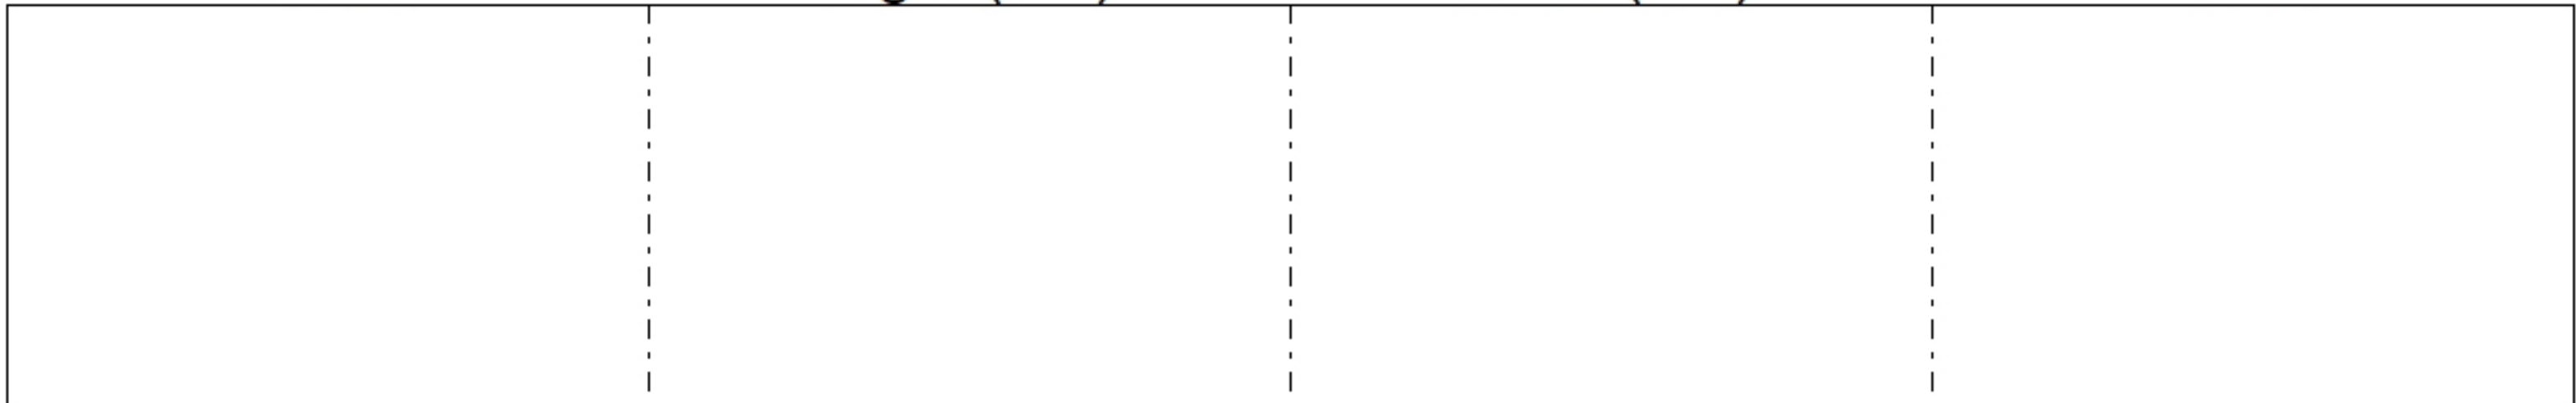
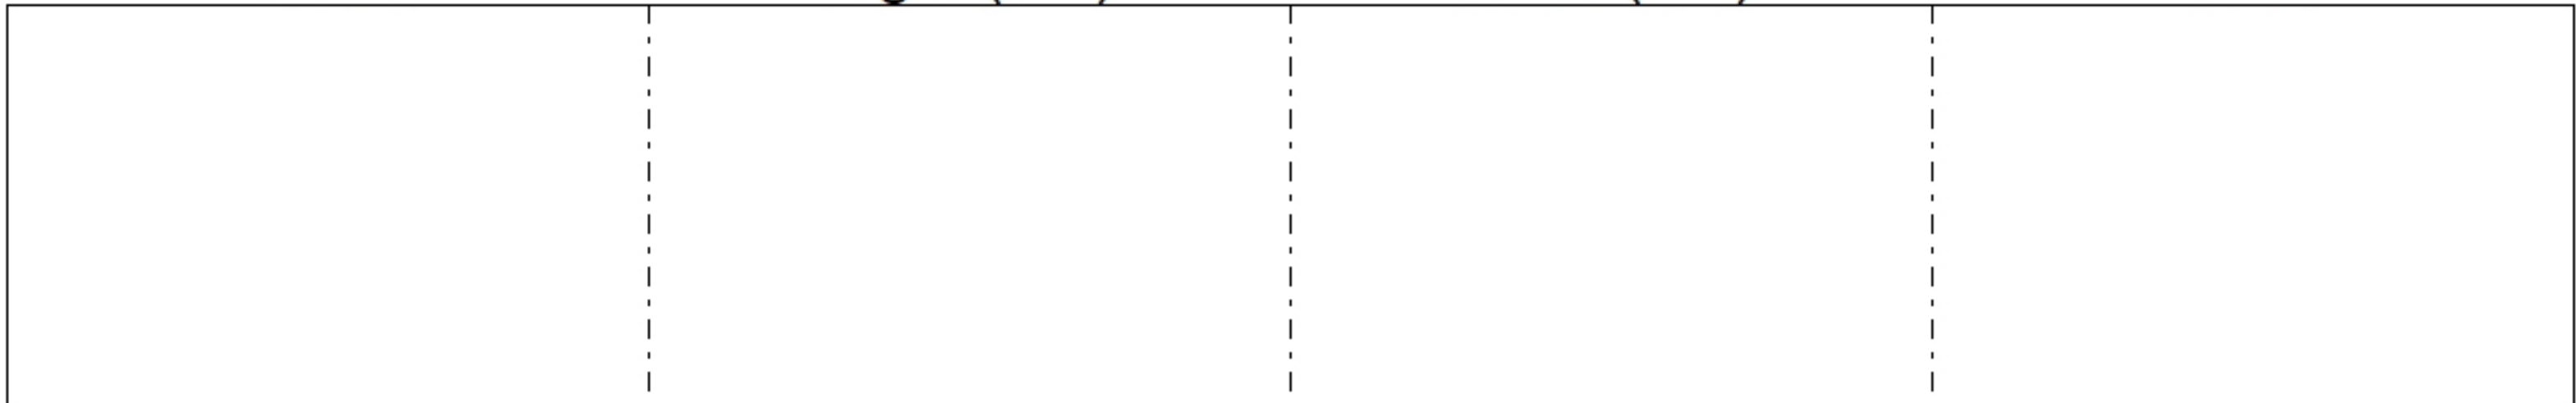


Job Name: 24-3690C - Home of the Innocents Job Location: Louisville, KY 40206 Contractor: Louisville Paving and Construction					Plant: Beaver Dam, KY 9/3/2026 1:00:01 PM		Tech: J. Horsley PC: B. Thompson												
Structure ID: C1-DIV																			
P1		BX4848-08RVF-FTB			BOX RISER 8inW, Variable Ht FTB F/F														
P2) 48" x 48" - CASTING HEIGHT - 0" P1) 48" x 48" - BOX RISER 8inW, Variable Ht FTB F/F - 30" 1) 48" x 48" - Conseal CS-102 1.00"						0 lb 4511 lb 0 lb ----- Structure Total: 4511 lb		Structure Notes: . 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,500 PSI AT 28 DAYS. 3. NO STEPS. . REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .47) #5 BARS AT 8" C.C.E.W.											
Rim: 2.5'		Rim to Invert: 0'		Slack: 0"		Sump: 0"		Step Position: 270°											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset									
Invert 1																			
Invert 2																			
Invert 3																			
Invert 4																			
Invert 5																			
Invert 6																			
Invert 7																			
Invert 8																			
RIGHT-SIDE UP VIEW (int. dimensions)																			
																			
		INSIDE WALL DIMENSIONS																	
(P1)		<table><tr><td>Front</td><td>Right (48")</td><td>Back (48")</td><td>Left</td></tr><tr><td colspan="4"></td></tr></table>										Front	Right (48")	Back (48")	Left				
		Front	Right (48")	Back (48")	Left														
																			
Coating (Int): Coating (Ext):				Seam Up: Flat Seam Dn: Flat		Wall Thickness: 8" Floor Height: 0"		Height (Int): 30" Height (Ext): 30"		Weight (Net): 4511 lb Volume (Net): 1.15cu.yd									