



Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC					Plant: Beaver Dam 6/26/2026 7:35:34 AM		Tech: J. Horsley PC: C. Goff				
Structure ID: 109											
P1 BX24300808VF BOX BASE 8inW, 8inF, Variable Ht F/n											
P3) 15" x 27" - P.I.P. - BY OTHERS - 8" P2) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE F/F - 8" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht F/n - 35" 1) CASTING - HOE KY-230-G F/G (GRADE) 1) 24" x 30" - Conseal CS-102 1.00" 2) Hole - 20 2) Hole - 4						0 lb 963 lb 4086 lb 237 lb 0 lb 0 lb 0 lb ----- 0 lb Structure Total: 5286 lb		Structure Notes: ** KYTC STATE PROJECT ** STATION: 406+75 RT 1. PER KYTC DBI TYPE 13G / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE KY-230G FRAME & GRATE SUPPLIED BY ICAST - POURED IN PLACE BY OTHERS			
Rim: 564.06' Rim to Invert: 4.28' Slack: 0.36" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	559.78'	0°	20"	15" HDPE	17.6"	Hole 20	20"	20"	-1.25"	0"	
Invert 2	559.78'	180°	20"	15" HDPE	17.6"	Hole 20	20"	20"	-1.25"	0"	
Invert 3	562'	90°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	26.625"	0"	
Invert 4	562'	180°	20"	4" WEEP HOLE	4"	Hole 4	4"	4"	26.625"	0"	
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

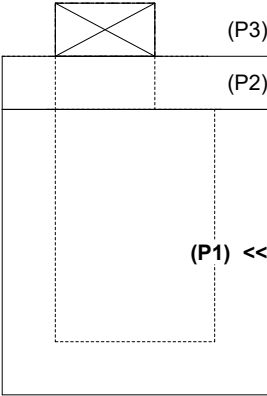

UPSIDE-DOWN VIEW (int. dimensions)

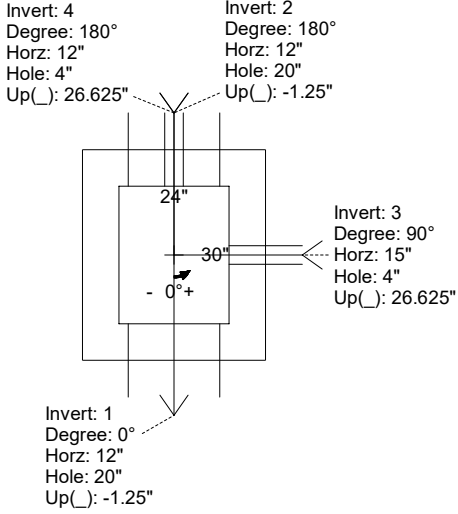

INSIDE WALL DIMENSIONS

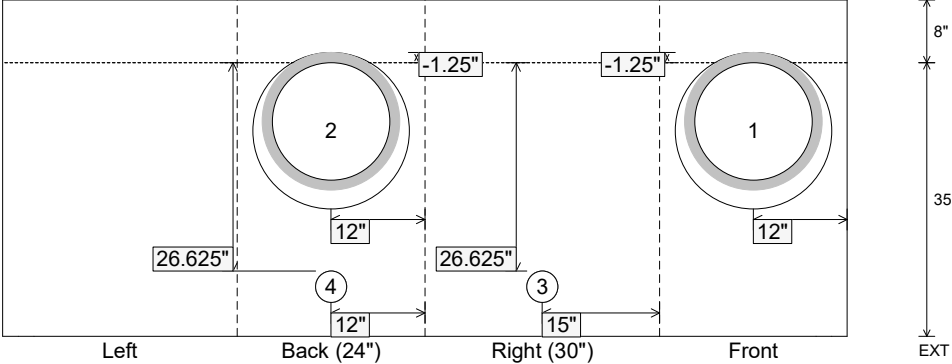

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 35" Height (Ext): 43"	Weight (Net): 4086 lb Volume (Net): 1.04cu.yd
----------------------------------	-------------------------------	--	--	--