


Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018)
Job Location: Hopkinsville, KY
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

Tech: J. Horsley

6/26/2026 7:44:29 AM

PC: C. Goff



Structure ID: 204

P2 BX024048-08LD08-15X27

CB FLAT TOP 8"W w/15"x27" HOLE F/F

- P3) 15" x 27" - P.I.P. - BY OTHERS - 8"
P2) 24" x 48" - CB FLAT TOP 8"W w/15"x27" HOLE F/F - 8"
P1) 24" x 48" - BOX BASE 8inW, 8inF, Variable Ht F/n - 17"
1) CASTING - HOE KY-230-G F/G (GRADE)
1) SECONDARY POUR
1) 24" x 48" - Conseal CS-102 1.00"
1) DOGHOUSE INVRTD - 20"x18.25"
2) Hole - 4



0 lb
1447 lb
3369 lb
237 lb
0 lb
0 lb
0 lb
0 lb
Structure Total: 5052 lb

Structure Notes:

** KYTC STATE PROJECT **

STATION: 410+35 LT

1. PER KYTC DBI TYPE 13G / ASTM C-913 SPECS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: DOUBLE MAT #5 BAR @ 6" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. HOE KY-230G FRAME & GRATE SUPPLIED BY ICAST - POURED IN PLACE BY OTHERS
5. WET STICK #5 BAR @ 12" C.C. E.W. (GRADE 60) 6" OUT TOP OF FLAT LID AROUND 15" X 27" OPENING - 4" MIN. PENETRATION INTO FLAT LID
6. LIFTERS: 4 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING
7. TOP SURFACE TO RECEIVE FLOATED FINISH

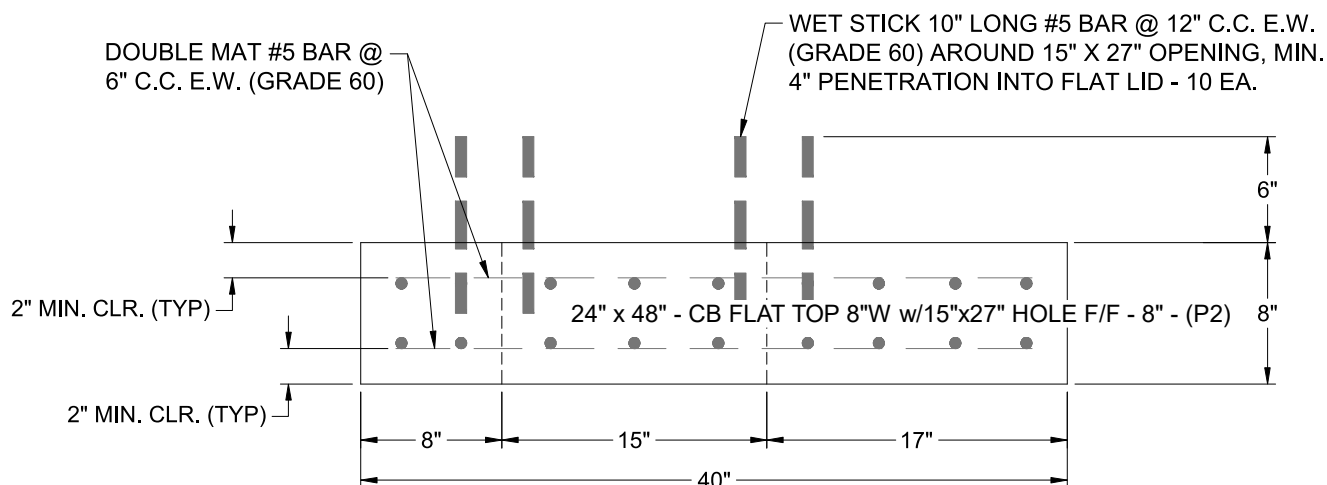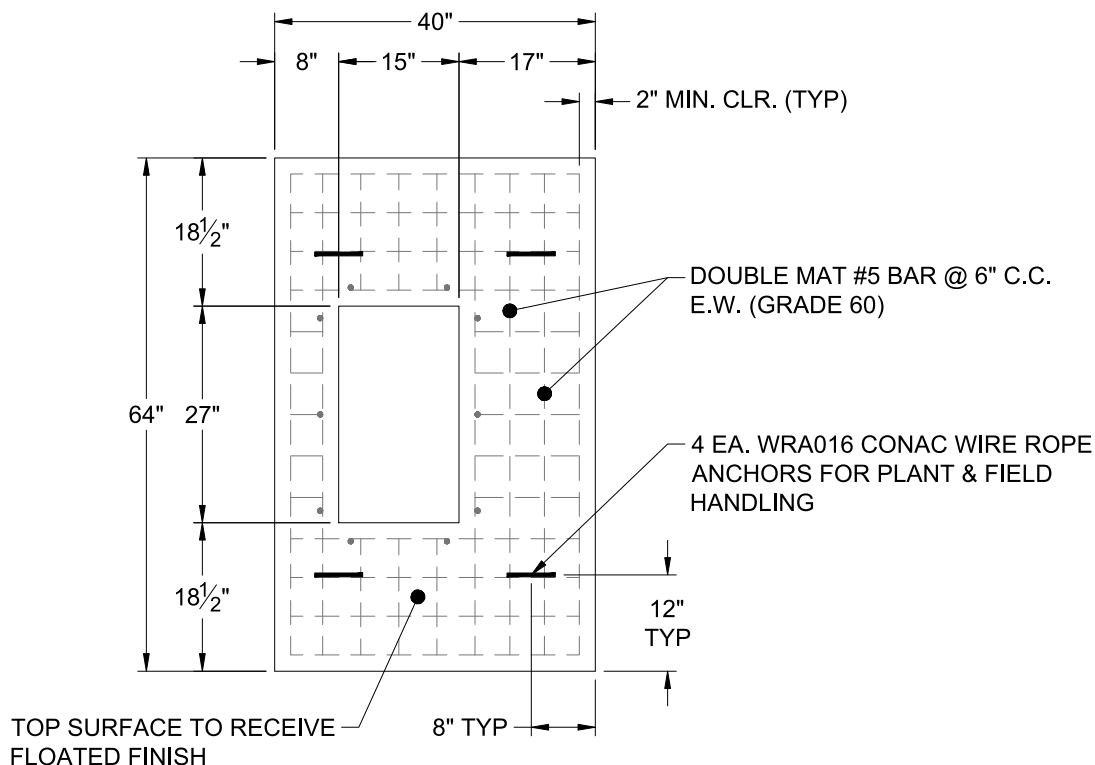

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1447 lb
Volume (Net): 0.37cu.yd