Job Name: 25-3579 - Lebanon Rd Clarks Run Trunk Sewer Ph 2 Job Location: Danville, KY Contractor: Hubert Excavating & Contracting	Plant: 100 6/7/2026 1:25:23 PM	Tech: J. Horsley PC: C. Goff	

Structure ID: MH A12

P2 MH060RS60S MH RISER w/COATING T/G

P4)	24" - CASTING HEIGHT - 7"	0 lb
P3)	60" - MH FLAT TOP w/ 24" ECC Hole F/G - 13"	2869 lb
P2)	60" - MH RISER w/COATING T/G - 60"	6264 lb
P1)	60" - MH BASE w/FLANGE (08F/07EF) w/Coating T/n - 50"	8187 lb
2)	JOINT WRAP - 12" WD x 060" MAC WRAP	0 lb
1)	60" - MH INVERT CHANNEL - FULL HEIGHT	2692 lb
1)	SPECIAL EXTERNAL COATING - Carboline 300M	0 lb
1)	SECONDARY POUR - Extended Flange	0 lb
2)	60" - Conseal CS-102 1.00" (Double)	0 lb
1)	24" - Conseal CS-102 1.00" (Double)	0 lb
2)	A-Lok - 1040	2 lb
9)	MH Step ML-10-TDS-NCR - 10"	0 lb
236.49 SqFt)	Carboline Bitumastic 300M [EXT]	0 lb
	Structure Total:	20013 lb

Rim: 900.49' Rim to Invert: 10.655' Slack: 0.075" Sump: 2.215" Step Position: 116.5°

Structure Notes:
1. PER ASTM C-478 SPECIFICATIONS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: PER ASTM A615
4. CARBOLINE 300M EXTERIOR COATING REQUIRED
5. STEPS AT 116.5 DEGREES
6. HOE MC-375 FRAME & COVER "SANITARY" SUPPLIED BY OTHERS

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

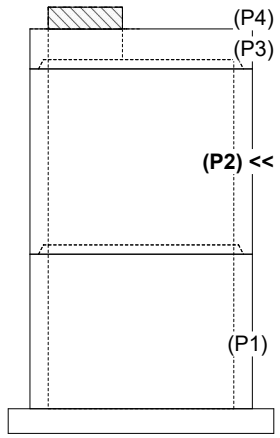

RIGHT-SIDE UP VIEW (int. dimensions)

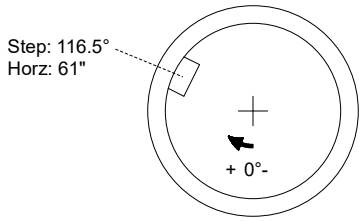

INSIDE WALL DIMENSIONS

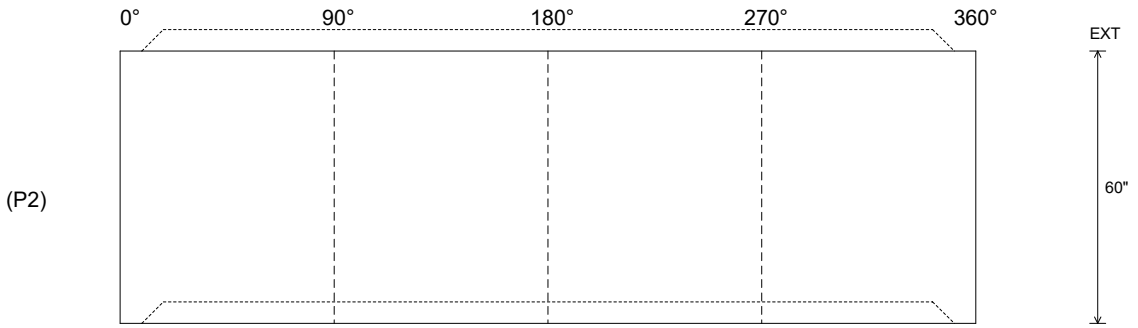

Coating (Int): Coating (Ext): Carboline Bitumastic 300M	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 6" Floor Height: 0"	Height (Int): 60" Height (Ext): 60"	Weight (Net): 6264 lb Volume (Net): 1.6cu.yd

Job Number:

25-3579

Job Name:

Lebanon Rd Clarks Run Trunk Sewer Ph 2

Structure:

MH A12

Note:

This Structure Is To Receive An External Coating of Carboline 300M (Supplied By iCast)