

MH RISER w/COATING T/G

0 lb
3116 lb
4192 lb
5207 lb
0 lb
1440 lb
0 lb
0 lb
2 lb
8 lb
0 lb
0 lb

Structure Notes: 1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. CASTING BY OTHERS (HOE WT-375 SAN. F/C)
4. ALL PIECES TO HAVE EXTERIOR COATING (CARBOLINE BITUMASTIC 300M).
REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB = H20 LOADING.
- RISER/WALLS (As .18)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Structure Total: 13965 lb

[illegible]

A diagram of a four-story building. The building has a rectangular base and four stories. The roof is sloped, with a hatched section on the left side. The labels (P1), (P2), (P3), and (P4) are positioned to the right of the building, corresponding to the four stories from bottom to top. (P1) is at the base, (P2) is at the first floor level, (P3) is at the second floor level, and (P4) is at the top of the hatched roof section.

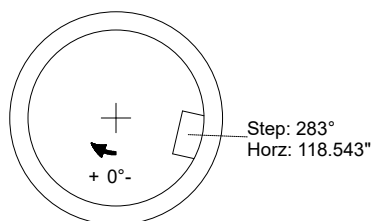


Diagram illustrating a rectangular structure with a top flange and a bottom flange. The top flange is labeled with angles 0°, 90°, 180°, 270°, and 360°. The bottom flange is labeled with angles 0°, 90°, 180°, 270°, and 360°. The height of the structure is labeled 60°. The label (P2) is on the left side.

Weight (Net): 4192 lb
Volume (Net): 1.07cu.yd

Job Number:

25-3579

Job Name:

Lebanon Rd Clarks Run Trunk Sewer Ph 2

Structure:

MH A18

Note:

This structure is to receive an external coating of carboline 300M (supplied by ICAST)