

Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018)
Job Location: Hopkinsville, KY
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

Tech: J. Horsley

6/26/2026 7:44:34 AM

PC: C. Goff



Structure ID: 217

P2 BX036036-08TS024036

CB TRANSITION SLAB 24"X36" HOLE T/F

P4) 24" x 120" - CB INLET KY A 10' TOP LEFT F/G - 10"
P3) 24" x 120" - CB INLET KY A 10' BOTTOM LEFT T/G - 18"
P2) 36" x 36" - CB TRANSITION SLAB 24"X36" HOLE T/F - 8"
P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 31"

1) CASTING - HOE KY-206 F/C (KY TY1)

1) This Structure Includes a Cast-in Item - KY-206 Frame (Supplied by iCast)

1) 36" x 36" - Conseal CS-102 1.00"

1) 24" x 36" - Conseal CS-102 1.00"

1) DOGHOUSE INVRTD - 30"x32.75"

1) Hole - 20

1) Hole - 24

1) Hole - 22

1) Hole - 6

3400 lb

5270 lb

1235 lb

4149 lb

206 lb

0 lb

0 lb

0 lb

0 lb

0 lb

0 lb

0 lb

0 lb

Structure Total:

14260 lb

Structure Notes:

** KYTC STATE PROJECT **

STATION: 418+00 RT



1. PER KYTC CBI TYPE A / ASTM C-913 SPECS

2. CONCRETE: 4,000 PSI AT 28 DAYS

3. REINFORCEMENT: DOUBLE MAT #5 BAR @ 6" C.C.
E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE
(TYP)

4. LIFTERS: 4 EA. WRA016 CONAC WIRE ROPE
ANCHORS FOR PLANT & FIELD HANDLING

5. TOP SURFACE TO RECEIVE FLOATED FINISH

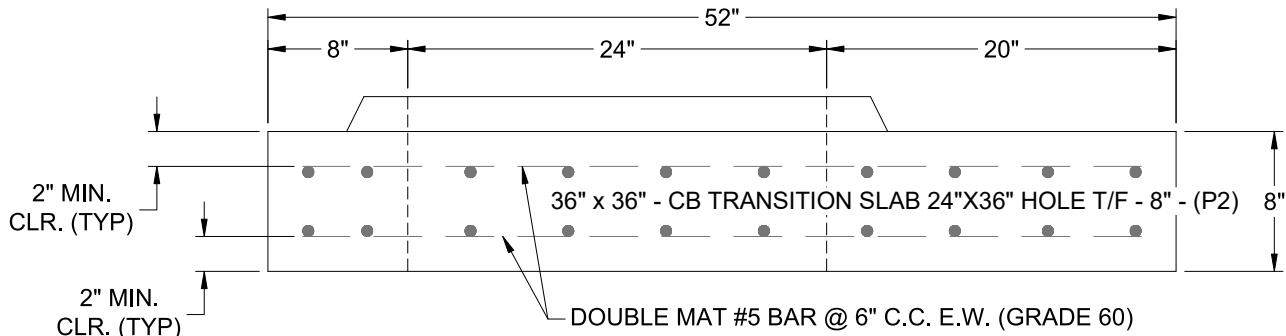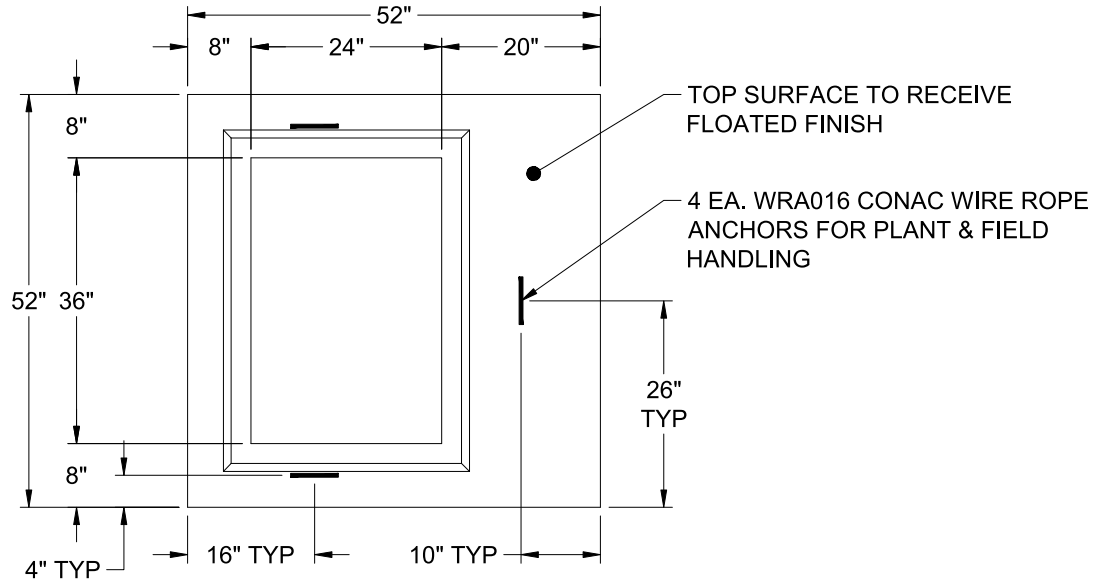

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1235 lb
Volume (Net): 0.32cu.yd