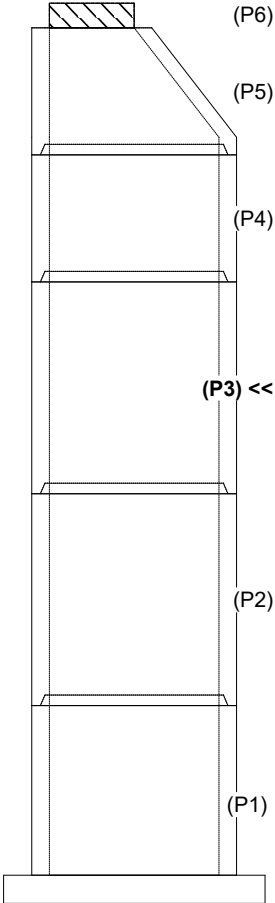
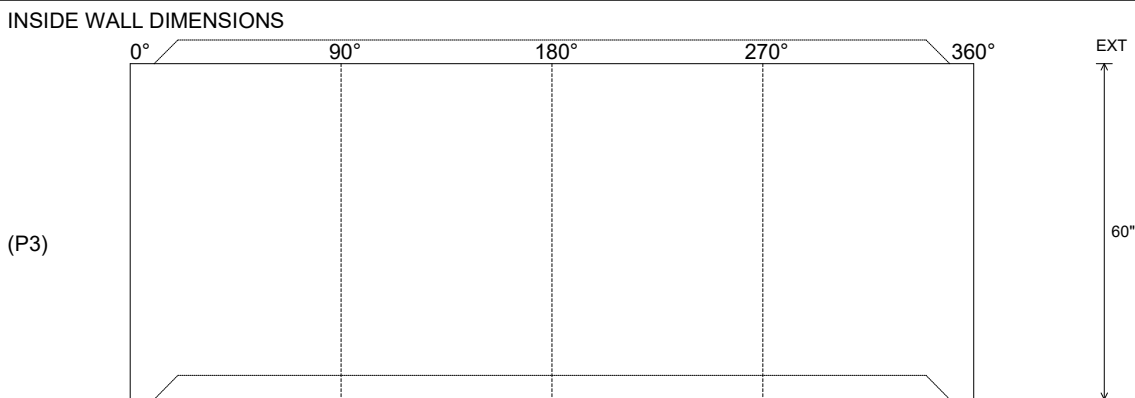


Job Name: 25-3579 - Lebanon Rd Clarks Run Trunk Sewer Ph 2 Job Location: Danville, KY Contractor: Hubert Excavating & Contracting					Plant: 100 8/21/2026 1:12:27 PM		Tech: J. Horsley PC: C. Goff																																																																																																							
Structure ID: MH A23																																																																																																														
P3		MH048RS60S																																																																																																												
MH RISER w/COATING T/G																																																																																																														
P6) 24" - CASTING HEIGHT - 7" P5) 48" - ECC CONE w/ 24" HOLE, w/Coating F/G - 36" P4) 48" - MH RISER w/COATING T/G - 36" P3) 48" - MH RISER w/COATING T/G - 60" P2) 48" - MH RISER w/COATING T/G - 60" P1) 48" - MH BASE w/FLANGE (08F/08EF) w/Coating T/n - 48" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 1) JOINT WRAP - 12" WD x 048" MAC WRAP 1) SPECIAL EXTERNAL COATING 4) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) A-Lok - 0890 20) MH Step ML-10-TDS-NCR - 10" 309.13 SqFt) Carboline Bitumastic 300M [EXT]					0 lb 2251 lb 2515 lb 4192 lb 4192 lb 5642 lb 1440 lb 0 lb 0 lb 0 lb 0 lb 2 lb 0 lb 0 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY OTHERS (HOE WT-375 SAN. F/C). 4. ALL PIECES TO HAVE EXTERIOR COATING (CARBOLINE BITUMASTIC 300M). REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.																																																																																																							
Rim: 912.48'					Rim to Invert: 20.475'		Slack: 0.7"		Sump: 2"		Step Position: 264°																																																																																																			
<table><tr><td>Position</td><td>Elev</td><td>Angle</td><td>Ext. (cw)</td><td>Pipe</td><td>Pipe OD</td><td>Connector</td><td>Hole</td><td>Horz Size</td><td>Up ()</td><td>Offset</td></tr><tr><td>Invert 1</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 2</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Invert 8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>												Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	Invert 1											Invert 2											Invert 3											Invert 4											Invert 5											Invert 6											Invert 7											Invert 8										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset																																																																																																				
Invert 1																																																																																																														
Invert 2																																																																																																														
Invert 3																																																																																																														
Invert 4																																																																																																														
Invert 5																																																																																																														
Invert 6																																																																																																														
Invert 7																																																																																																														
Invert 8																																																																																																														
 RIGHT-SIDE UP VIEW (int. dimensions)  INSIDE WALL DIMENSIONS <table><tr><td>Coating (Int): Coating (Ext): Carboline Bitumastic 300M</td><td>Seam Up: Tongue Seam Dn: Groove</td><td>Wall Thickness: 5" Floor Height: 0"</td><td>Height (Int): 60" Height (Ext): 60"</td><td>Weight (Net): 4192 lb Volume (Net): 1.07cu.yd</td></tr></table>												Coating (Int): Coating (Ext): Carboline Bitumastic 300M	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 60" Height (Ext): 60"	Weight (Net): 4192 lb Volume (Net): 1.07cu.yd																																																																																														
Coating (Int): Coating (Ext): Carboline Bitumastic 300M	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 60" Height (Ext): 60"	Weight (Net): 4192 lb Volume (Net): 1.07cu.yd																																																																																																										

Job Number:

25-3579

Job Name:

Lebanon Rd Clarks Run Trunk Sewer Ph 2

Structure:

MH A23

Note:

This structure is to receive an external coating of carboline 300M (supplied by ICAST)