

Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam



Size: 24" x 30"

Rim to Invert: 3.27'

Floor Height: 8"


Slack: 0.49"

4. HOE KY-460-11 FRAME & GRATE SUPPLIED BY ICAST

1) Hole - 20



0 lb

Structure Total: 4735 lb

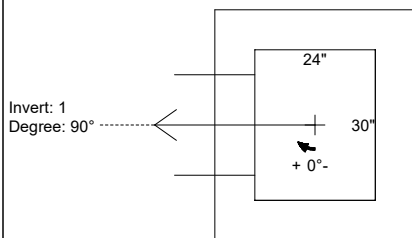

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (↓)	Ref
Rim	554.8'							
Reducer								
Invert 1	551.53'	90°	15" HDPE	17.6"	20"	Hole 20	-1.25"	P1
Invert 2								
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

24" x 30" - CASTING HEIGHT - 3.75" - (P2)

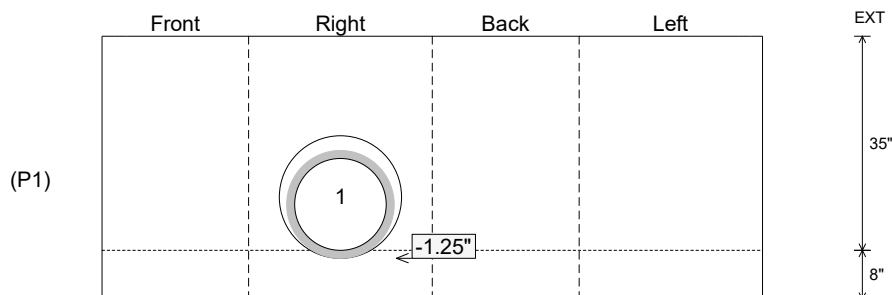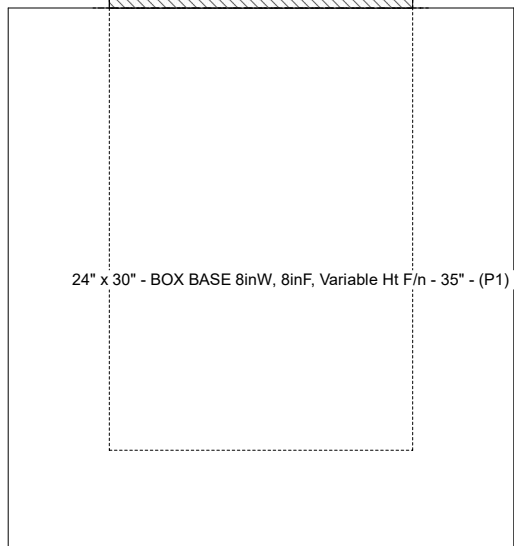

SUBMITTAL
APPROVED BY: