
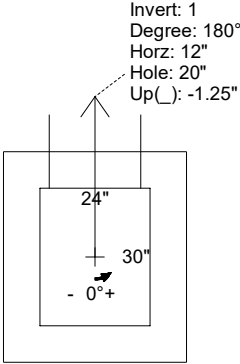
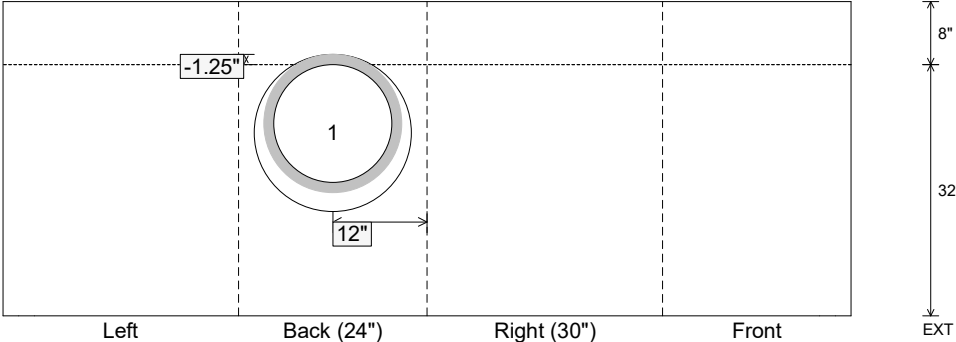


Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC					Plant: Beaver Dam 6/26/2026 7:36:03 AM		Tech: J. Horsley PC: C. Goff				
Structure ID: 224											
P1		BX24300808VF		BOX BASE 8inW, 8inF, Variable Ht F/n							
P2) 24" x 30" - CASTING HEIGHT - 3.75" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht F/n - 32" 1) CASTING - HOE KY-460-11 F/G (DBI 11) 1) 24" x 30" - Conseal CS-102 1.00" 1) Hole - 20						0 lb 4032 lb 421 lb 0 lb 0 lb ----- Structure Total: 4453 lb		Structure Notes: ** KYTC STATE PROJECT ** STATION: 420+85 RT 1. PER KYTC DBI TYPE 11 / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE KY-460-11 FRAME & GRATE SUPPLIED BY ICAST			
Rim: 552.3'		Rim to Invert: 3'		Slack: 0.25"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	549.3'	180°	20"	15" HDPE	17.6"	Hole 20	20"	20"	-1.25"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimensions)   INSIDE WALL DIMENSIONS  Coating (Int): Coating (Ext): Seam Up: Flat Seam Dn: n/a Wall Thickness: 8" Floor Height: 8" Height (Int): 32" Height (Ext): 40" Weight (Net): 4032 lb Volume (Net): 1.03cu.yd											