

Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018)  
Job Location: Hopkinsville, KY  
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

Tech: J. Horsley

6/26/2026 7:44:35 AM

PC: C. Goff



## Structure ID: 225

**P2 BXLD3636FL-8T8WSP**

**BX FLAT LID 8inW SPEC. (KY JB-B1) F/F**

- P3) 24" - CASTING (cast in) - 4"  
P2) 36" x 36" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8"  
P1) 36" x 36" - BOX BASE 8inW, 8inF F/n - 60"  
1) CASTING - HOE KY-206 F/C (KY TY1)  
1) This Structure Includes a Cast-in Item - KY-206 Frame (Supplied by iCast)  
1) 36" x 36" - Con Seal CS-102 1.00"  
2) Hole - 30  
1) Hole - 20


0 lb  
1670 lb  
7744 lb  
206 lb  
0 lb  
0 lb  
0 lb  
0 lb  
Structure Total: 9620 lb

### Structure Notes:


\*\* KYTC STATE PROJECT \*\*

STATION: 421+90 RT

1. PER KYTC JB TYPE B / ASTM C-913 SPECS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: #5 BAR @ 6" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
4. HOE KY-206 FRAME & COVER "STORM" SUPPLIED BY ICAST - FRAME TO BE CAST INTO FLAT LID FLANGE SIDE UP
5. LIFTERS: 4 EA. 5CA14 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING - INSTALLED AS SHOWN
6. TOP SURFACE TO RECEIVE LIGHT BRUSH FINISH

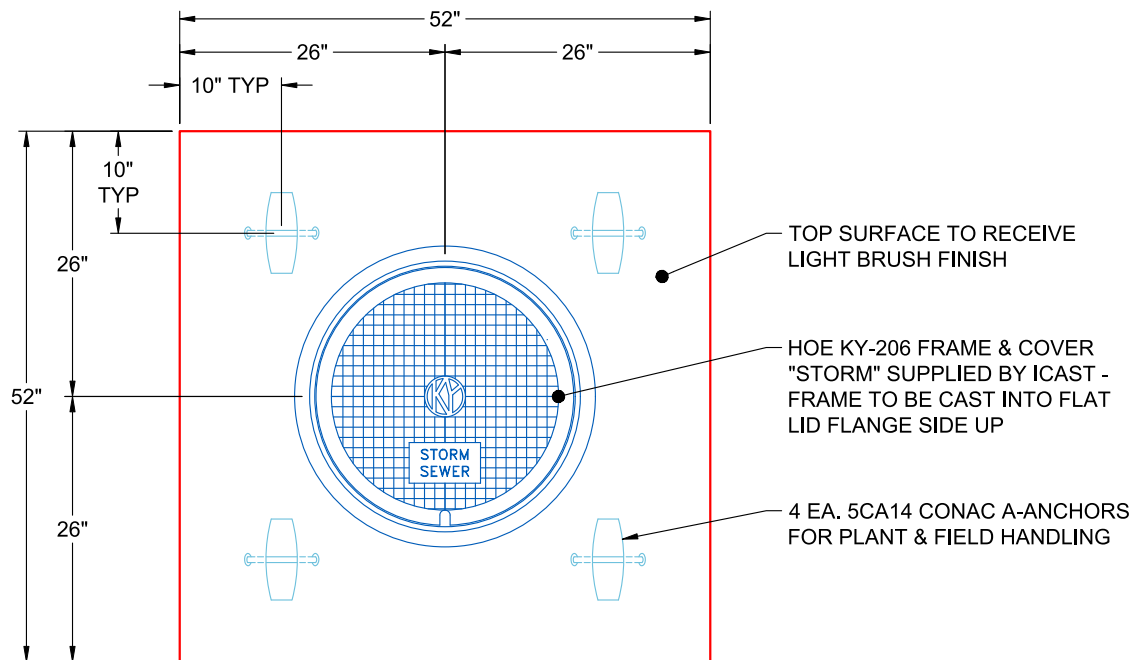

**PLAN VIEW  
(RIGHT SIDE UP)**

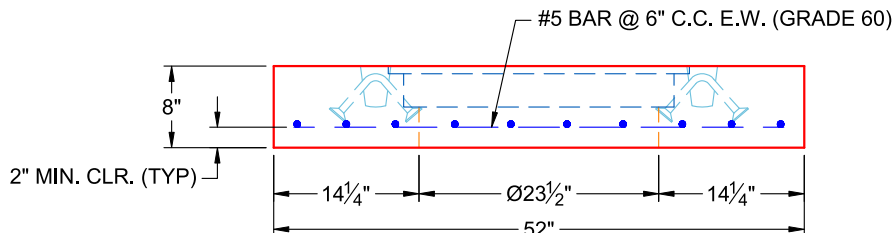

**FRONT VIEW  
(RIGHT SIDE UP)**

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1670 lb  
Volume (Net): 0.43cu.yd

**Job Number:**

24-4208

**Job Name:**

KYTC Christian Co. Call 100  
(241018)

**Structure:**

225

**Note:**

HOE KY-206 Frame Supplied By  
iCast To Be Cast Into Flat Lid Flange  
Side Up