

Plant: Beaver Dam

6/26/2026 7:44:36 AM

P2 BX024030-08LD08-15X27

CB FLAT TOP 8"W w/15"x27" HOLE F/F

	0 lb
	963 lb
	4673 lb
	237 lb
	0 lb
	0 lb
	0 lb

Structure Total:	5873 lb

**** KYTC STATE PROJECT ****

STATION: 421+90 RT

1. PER KYTC DBI TY

2. CONCRETE: 4,000 PSI AT 28 DAYS



3. REINFORCEMENT: DOUBLE MAT #5 BAR @ 6" C.C. E.W.
(GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)

4. HOE KY-230G FRAME & GRATE SUPPLIED BY ICAST -
POURED IN PLACE BY OTHERS

5. WET STICK #5 BAR @ 12" C.C. E.W. (GRADE 60) 6" OUT TOP OF FLAT LID AROUND 15" X 27" OPENING - 4" MIN. PENETRATION INTO FLAT LID

6. LIFTERS: 4 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING

7. TOP SURFACE TO RECEIVE FLOATED FINISH

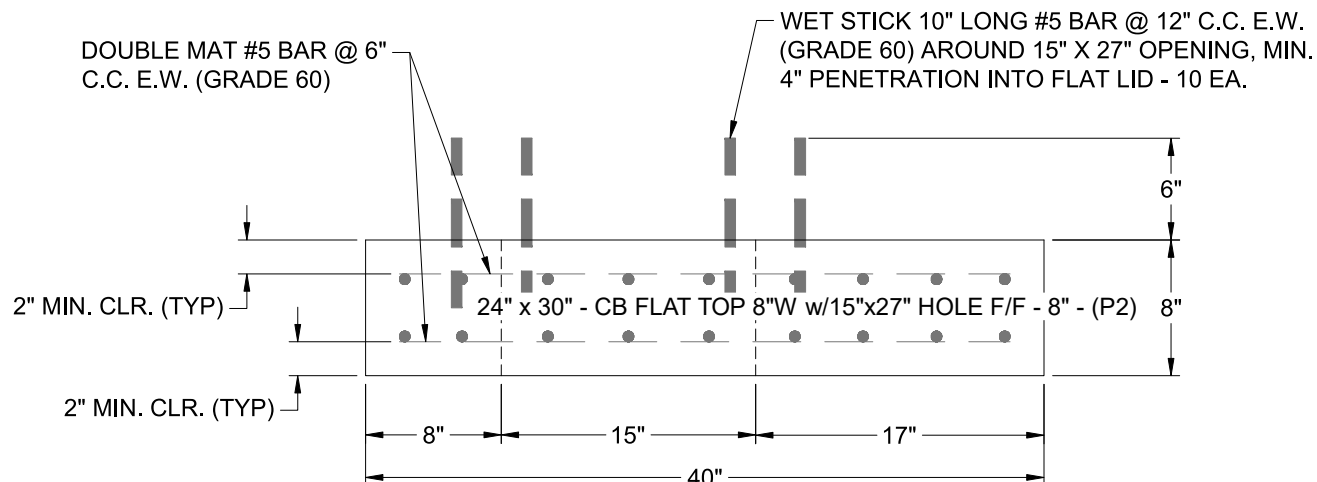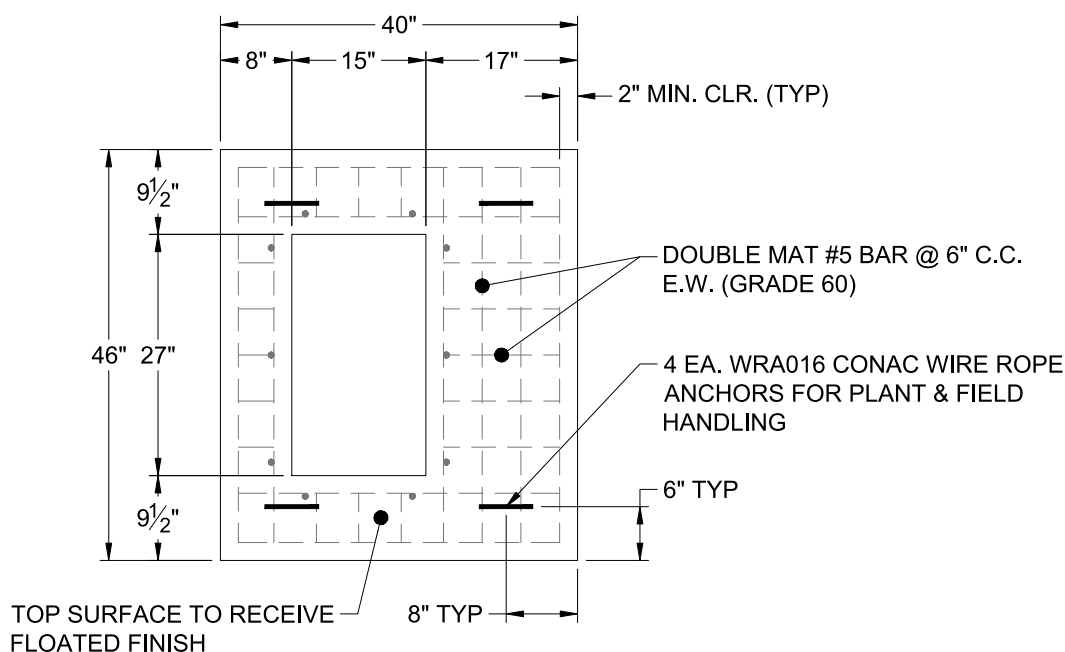

Weight (Net): 963 lb
Volume (Net): 0.25cu.yd