


- GENERAL NOTES:**
1. DESIGN LOADING - AASHTO HS-20.
 2. DESIGN SPECIFICATIONS - ACI 318-14.
 3. CONCRETE: 5,000 PSI AT 28 DAYS.
 4. JOINT SEALANT SHALL CONFORM TO ASTM C-990 OR ASTM C-443.
 5. REINFORCING: #5 BAR @ 4" C-C E.W. PER ASTM A615 (GRADE 60).
 6. WEIGHT: 945 LBS
 7. 36" X 36" HATCH PROVIDED BY OTHERS.
 8. HATCH TO BE CAST INTO THE TOP SLAB STRUCTURE TO HAVE INTERNALS INSTALLED BY ICAS.
 9. CONTECH'S LOGO AS WELL AS THE INLETS AND OUTLETS TO BE STENCILED ONTO THE STRUCTURE.

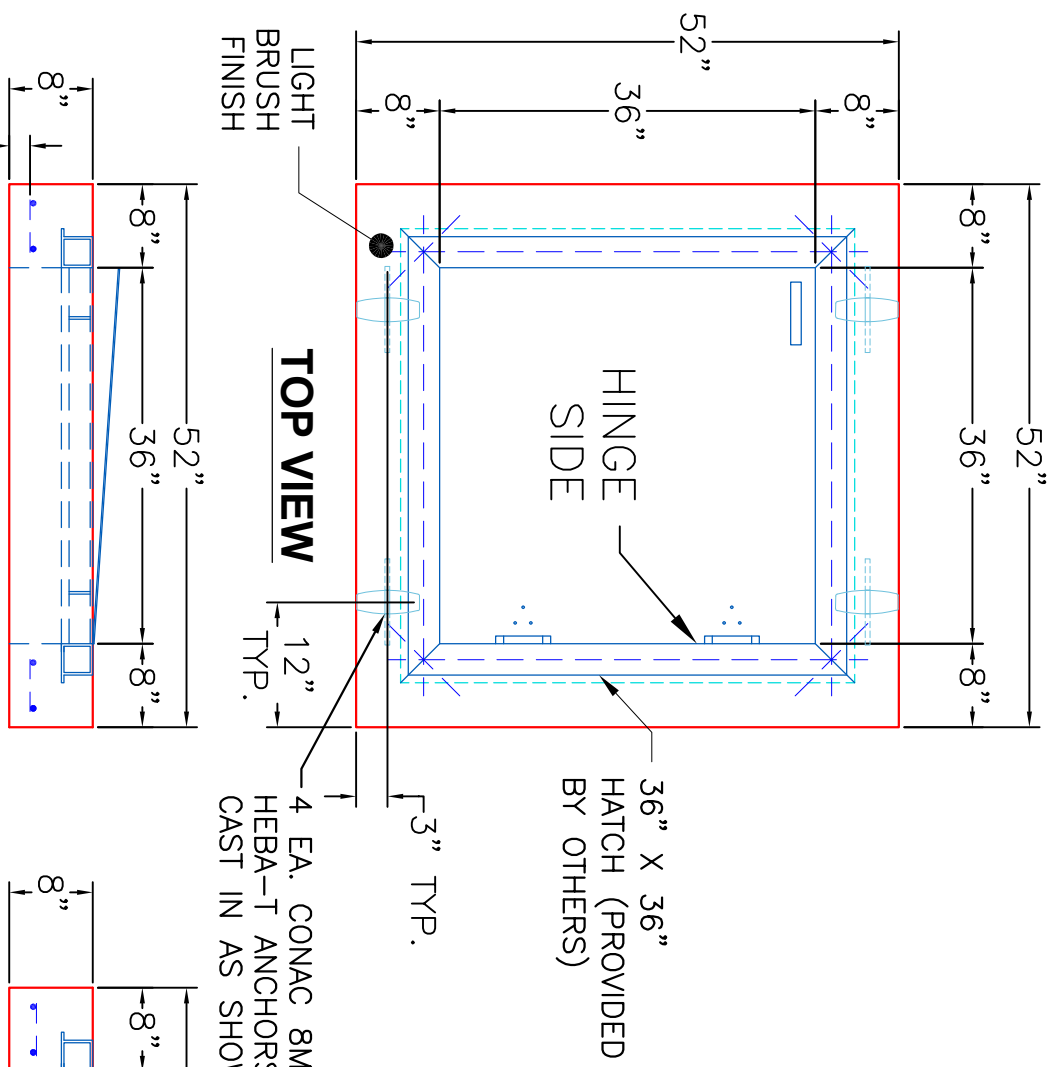

4 EA. CONAC 8MM
HEBA-T ANCHORS
CAST IN AS SHOWN.

FRONT VIEW

RIGHT VIEW

PRODUCTION WORK ORDER

PRODUCT I.D.: BX036036-08LD08S DESCRIPTION: 52" X 52" X 8" THICK SLAB W/ HATCH

QUALITY CONTROL CHECKLIST

- ALL DIMENSIONS CORRECT.
- LIFTERS INSTALLED.
- OPENING CORRECT LOCATION.
- REINFORCING CORRECT.
- SURFACE QUALITY ACCEPTABLE.
- EDGES CHAMFERED.
- ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP CUSTOMER: CONTECH ENGINEERED SOLUTIONS, LLC

PLANT: BEAVER DAM, KY. PROJECT: 836163 AMEREN AUDRAIN CTG DUALFUEL

WEIGHT: 945 LBS. STRUCTURE: 10-VCL30

TOP SECTION JOINT: N/A ORDER NO: 25-3595

BASE SECTION JOINT: N/A PC: T. SEKULA DRAWING: J. COPPAGE

QC CHECK INITIALS: DATE: 10/14/25 SCALE: NTS PG: 1 of 1

