
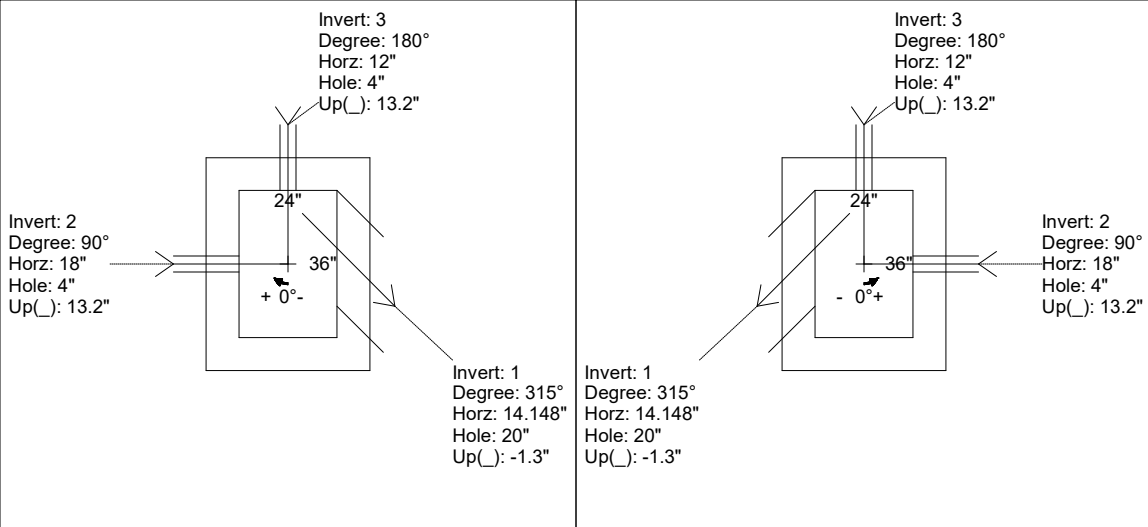
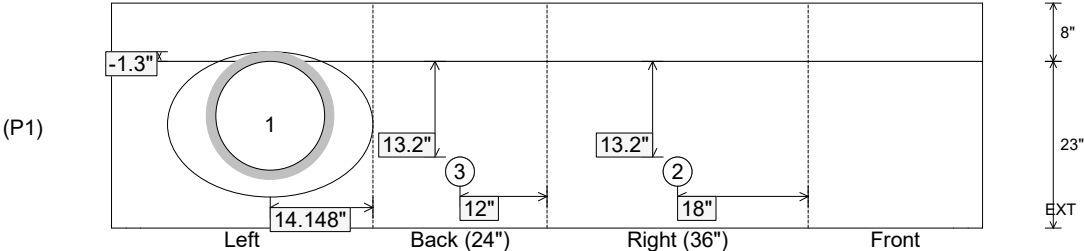


Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC					Plant: Beaver Dam 7/30/2026 8:55:22 AM		Tech: J. Horsley PC: C. Goff				
Structure ID: 238 (426+83 LT)											
P1		BX2436-08BVF									
BOX BASE 8inW, 8inF, Variable Ht F/n											
P3) 15" x 27" - P.I.P. - BY OTHERS - 8" P2) 24" x 36" - CB FLAT TOP 8"W w/15"x27" HOLE F/F - 8" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 23" 1) CASTING - HOE KY-230-G F/G (GRADE) 1) 24" x 36" - Conseal CS-102 1.00" 1) Hole - 20 2) Hole - 4						0 lb 1124 lb 3428 lb 237 lb 0 lb 0 lb 0 lb ----- Structure Total: 4789 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. KYTC DBI TYPE 13G / ASTM C-913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY ICAST (HOE KY-230 F/G). 4. STUB #5 BARS UP 6" AROUND 15x27 OPENING IN TOP SLAB (SPA@12"C/C) REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DBL MAT). - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 541.9'		Rim to Invert: 3.25'		Slack: 0"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	538.65'	315°	30.148"	15" HDPE	17.6"	Hole 20	20"	28.284"	-1.3"	-11.209"	
Invert 2	539.75'	90°	26"	4" WEEP HOLE	4"	Hole 4	4"	4"	13.2"	0"	
Invert 3	539.75'	180°	20"	4" WEEP HOLE	4"	Hole 4	4"	4"	13.2"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimensions)  (P3) (P2) (P1) <<  INSIDE WALL DIMENSIONS  Coating (Int): Coating (Ext): Seam Up: Flat Seam Dn: n/a Wall Thickness: 8" Floor Height: 8" Height (Int): 23" Height (Ext): 31" Weight (Net): 3428 lb Volume (Net): 0.88cu.yd											