

Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018)  
Job Location: Hopkinsville, KY  
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

Tech: J. Horsley

7/30/2026 8:57:23 AM

PC: C. Goff



**Structure ID: 242 (427+72 LT)**

**P2 BX024024-08LD08S**

**BX FLAT LID 8inW SPEC. (KY JB-B1) F/F**

P3) CASTING (cast in) - 0  
P2) 24" x 24" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8"  
P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 47"  
1) CASTING - HOE KY-206 F/C (KY TY1)  
1) 24" x 24" - Conseal CS-102 1.00"  
2) Hole - 20


Structure Total: 5667 lb

**Structure Notes:**

**\*\*KYTC STATE PROJECT\*\***

1. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. TOP SLAB w KYTC TYPE 1 F/C CAST FLUSH.

REINFORCING PER ASTM A615 (GRADE 60).  
- TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.  
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.  
- FLOOR (As .31) #5 BARS AT 12: C.C.E.W.

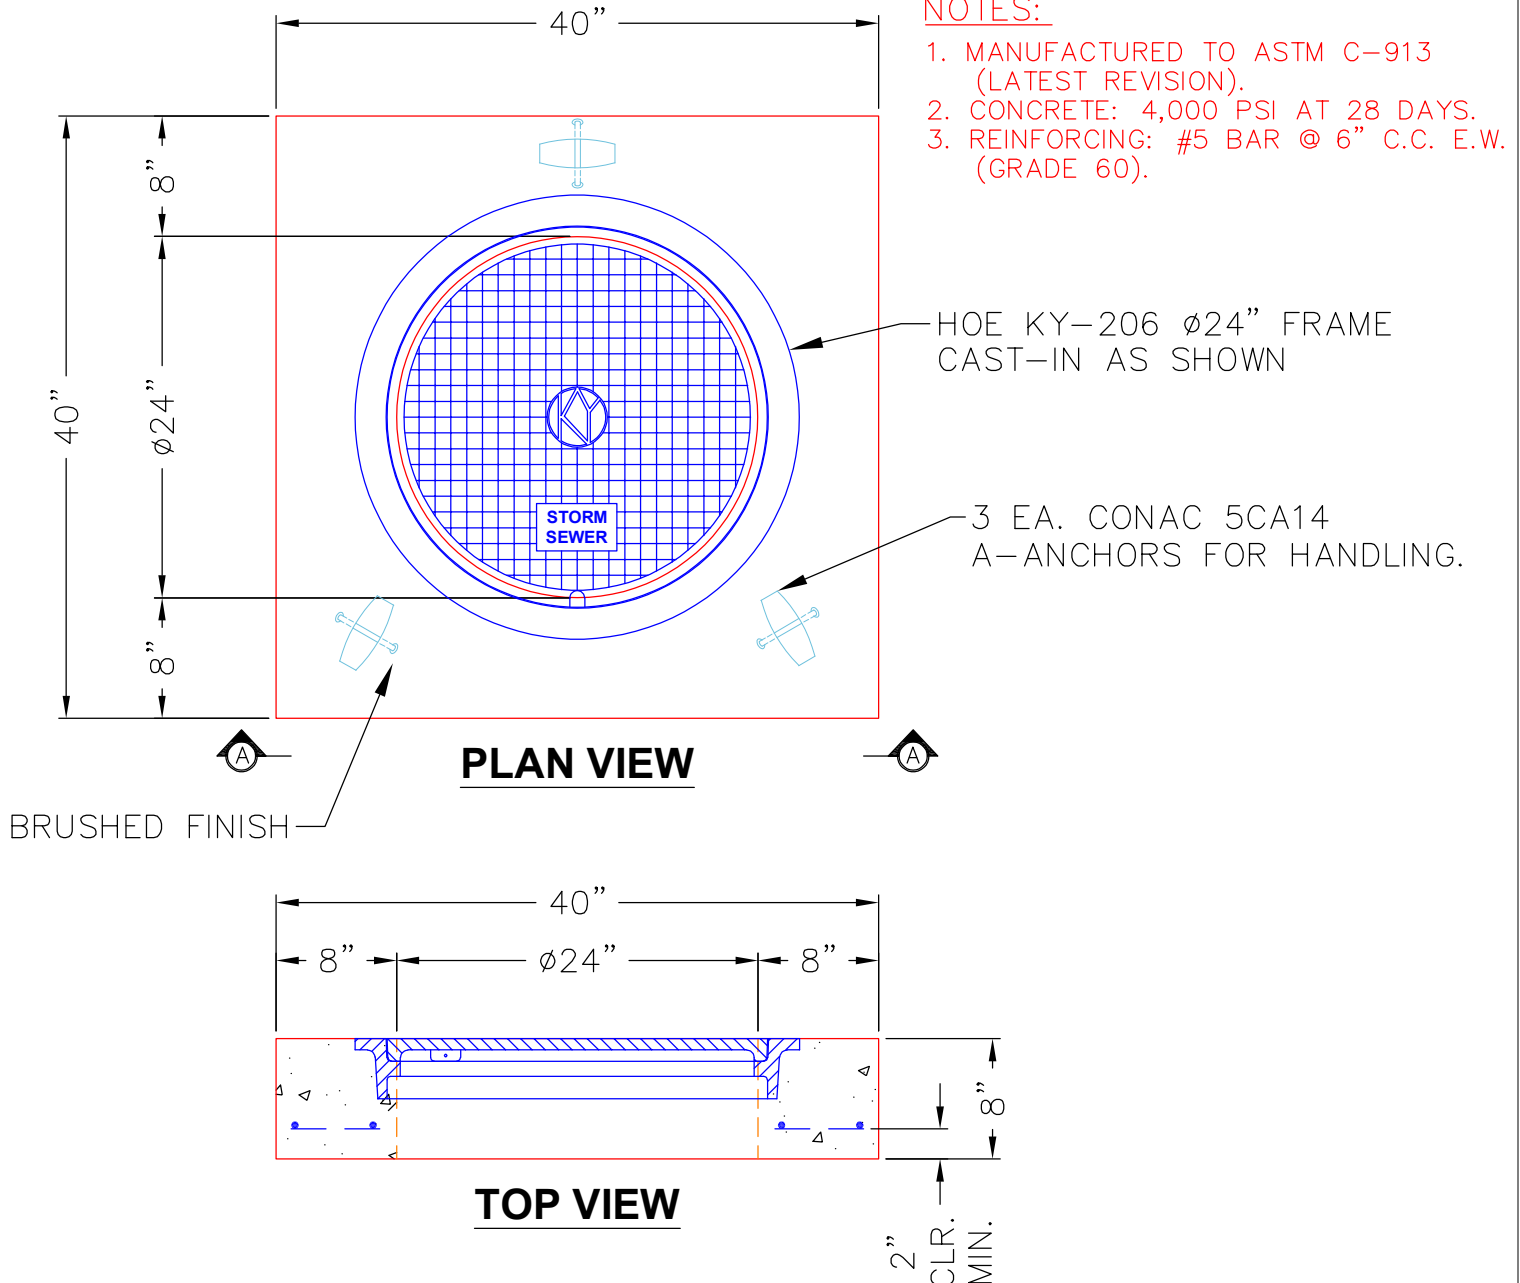

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 770 lb  
Volume (Net): 0.2cu.yd