



THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

GENERAL NOTES:


1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE 5,000 PSI AT 28 DAYS.
3. REINFORCING: #4 @ 9" O.C. E.W. (GRADE 60)
PER ASTM A615 (GRADE 60)

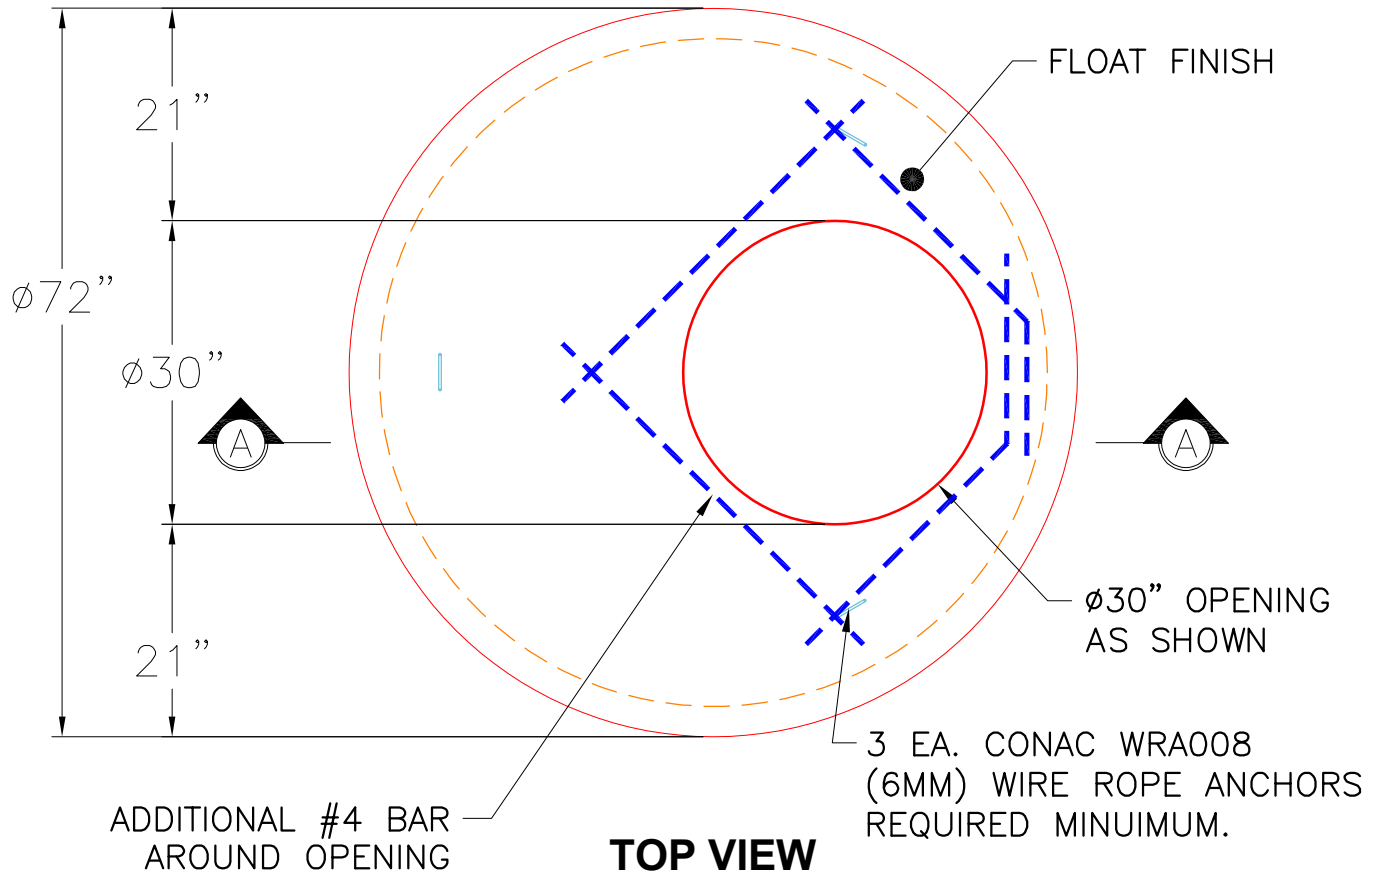

TOP VIEW

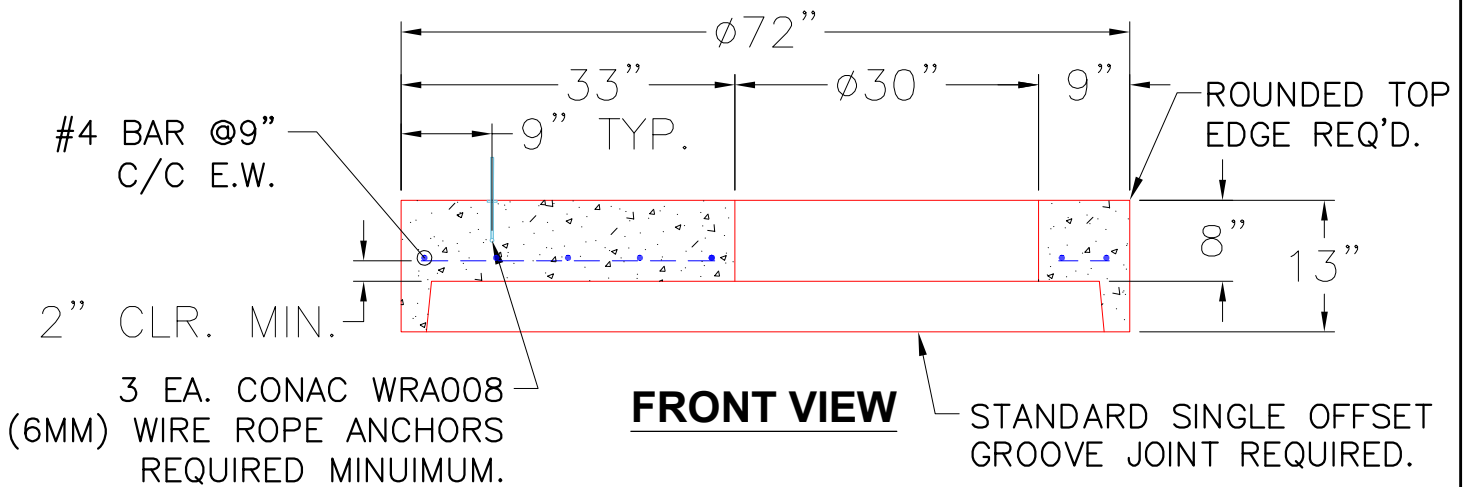

FRONT VIEW

<p>PRODUCTION WORK ORDER</p>		<p>PRODUCT I.D.: MH060LD13-30ECC</p>	<p>DESCRIPTION: 60"ø TOP SLAB, 13" HEIGHT W/ ø30" ECCENTRIC OPENING</p>		
	<p>QUALITY CONTROL CHECKLIST</p> <ul style="list-style-type: none"> <input type="checkbox"/> ALL DIMENSIONS CORRECT. <input type="checkbox"/> LIFTING ANCHORS INSTALLED. <input type="checkbox"/> HOLE LOCATION CORRECT. <input type="checkbox"/> REINFORCING CORRECT. <input type="checkbox"/> FLOAT FINISH ON SLAB SURFACE. <input type="checkbox"/> OUTSIDE TOP EDGE TROWELLED. <input type="checkbox"/> GROOVE JOINT INSTALLED. 		<p>PRODUCT VIEW: RIGHT SIDE UP</p>		<p>CUSTOMER: CONTECH ENGINEERING SOLUTIONS</p>
			<p>PLANT: BEAVER DAM, KY.</p>		<p>PROJECT: 858577 UNION SQUARE</p>
			<p>WEIGHT: 2,589 LBS.</p>		<p>STRUCTURE: 15-CS-5</p>
			<p>TOP SECTION JOINT: N/A</p>		<p>QUOTE/SALES ORDER NO: 25-3668</p>
			<p>BASE SECTION JOINT: GROOVE</p>		<p>PC: T. SEKULA DRAWING: J. COPPAGE</p>
			<p>QC CHECK INITIALS:</p>		<p>DATE: 10/14/25 SCALE: NTS PG. 1 of 1</p>