



Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC					Plant: Beaver Dam 7/30/2026 8:55:37 AM		Tech: J. Horsley PC: C. Goff				
Structure ID: 254 (430+25 LT)											
P1		BX2424-08BAVF		BOX BASE 8inW, 8inF, Variable Ht F/n							
P3) CASTING (cast in) - 0 P2) 24" x 24" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8" P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 44" 1) CASTING - HOE KY-206 F/C (KY TY1) 1) 24" x 24" - Conseal CS-102 1.00" 2) Hole - 20						0 lb 770 lb 4433 lb 206 lb 0 lb 0 lb ----- 5409 lb Structure Total:		Structure Notes: **KYTC STATE PROJECT** 1. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. TOP SLAB w KYTC TYPE 1 F/C CAST FLUSH. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W. - FLOOR (As .31) #5 BARS AT 12: C.C.E.W.			
Rim: 542'		Rim to Invert: 4.34'		Slack: 0.08"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	537.66'	90°	20"	15" HDPE	17.6"	Hole 20	20"	20"	-1.3"	0"	
Invert 2	537.66'	180°	20"	15" HDPE	17.6"	Hole 20	20"	20"	-1.3"	0"	
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											


RIGHT-SIDE UP VIEW (int. dimensions)

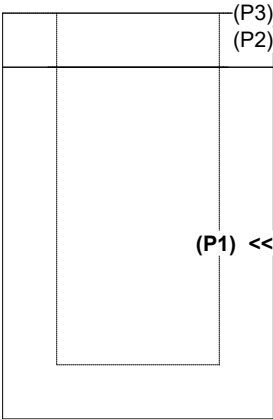

UPSIDE-DOWN VIEW (int. dimensions)

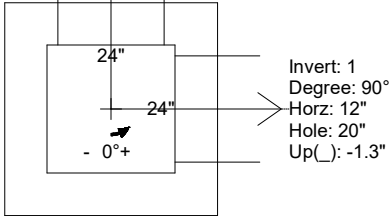

INSIDE WALL DIMENSIONS

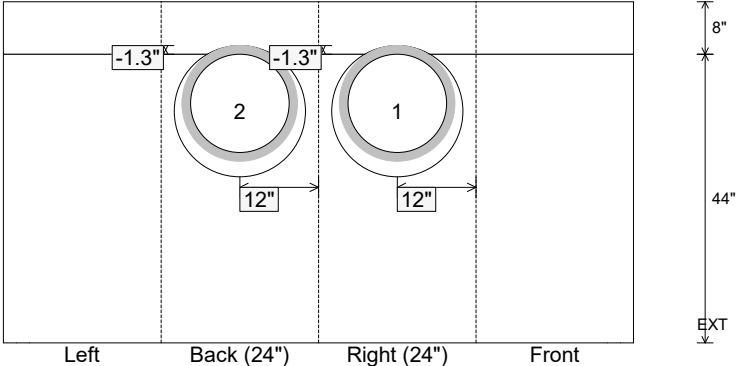

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 44" Height (Ext): 52"	Weight (Net): 4433 lb Volume (Net): 1.13cu.yd
----------------------------------	-------------------------------	--	--	--