

Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018)
Job Location: Hopkinsville, KY
Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

Tech: J. Horsley

7/30/2026 8:57:27 AM

PC: C. Goff



Structure ID: 254 (430+25 LT)

P2 BX024024-08LD08S

BX FLAT LID 8inW SPEC. (KY JB-B1) F/F

P3) CASTING (cast in) - 0
P2) 24" x 24" - BX FLAT LID 8inW SPEC. (KY JB-B1) F/F - 8"
P1) 24" x 24" - BOX BASE 8inW, 8inF, Variable Ht F/n - 44"
1) CASTING - HOE KY-206 F/C (KY TY1)
1) 24" x 24" - Conseal CS-102 1.00"
2) Hole - 20

Structure Total:

0 lb
770 lb
4433 lb
206 lb
0 lb
0 lb

5409 lb


Structure Notes:

****KYTC STATE PROJECT****

1. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. TOP SLAB w KYTC TYPE 1 F/C CAST FLUSH.

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .31) #5 BARS AT 12" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 12: C.C.E.W.

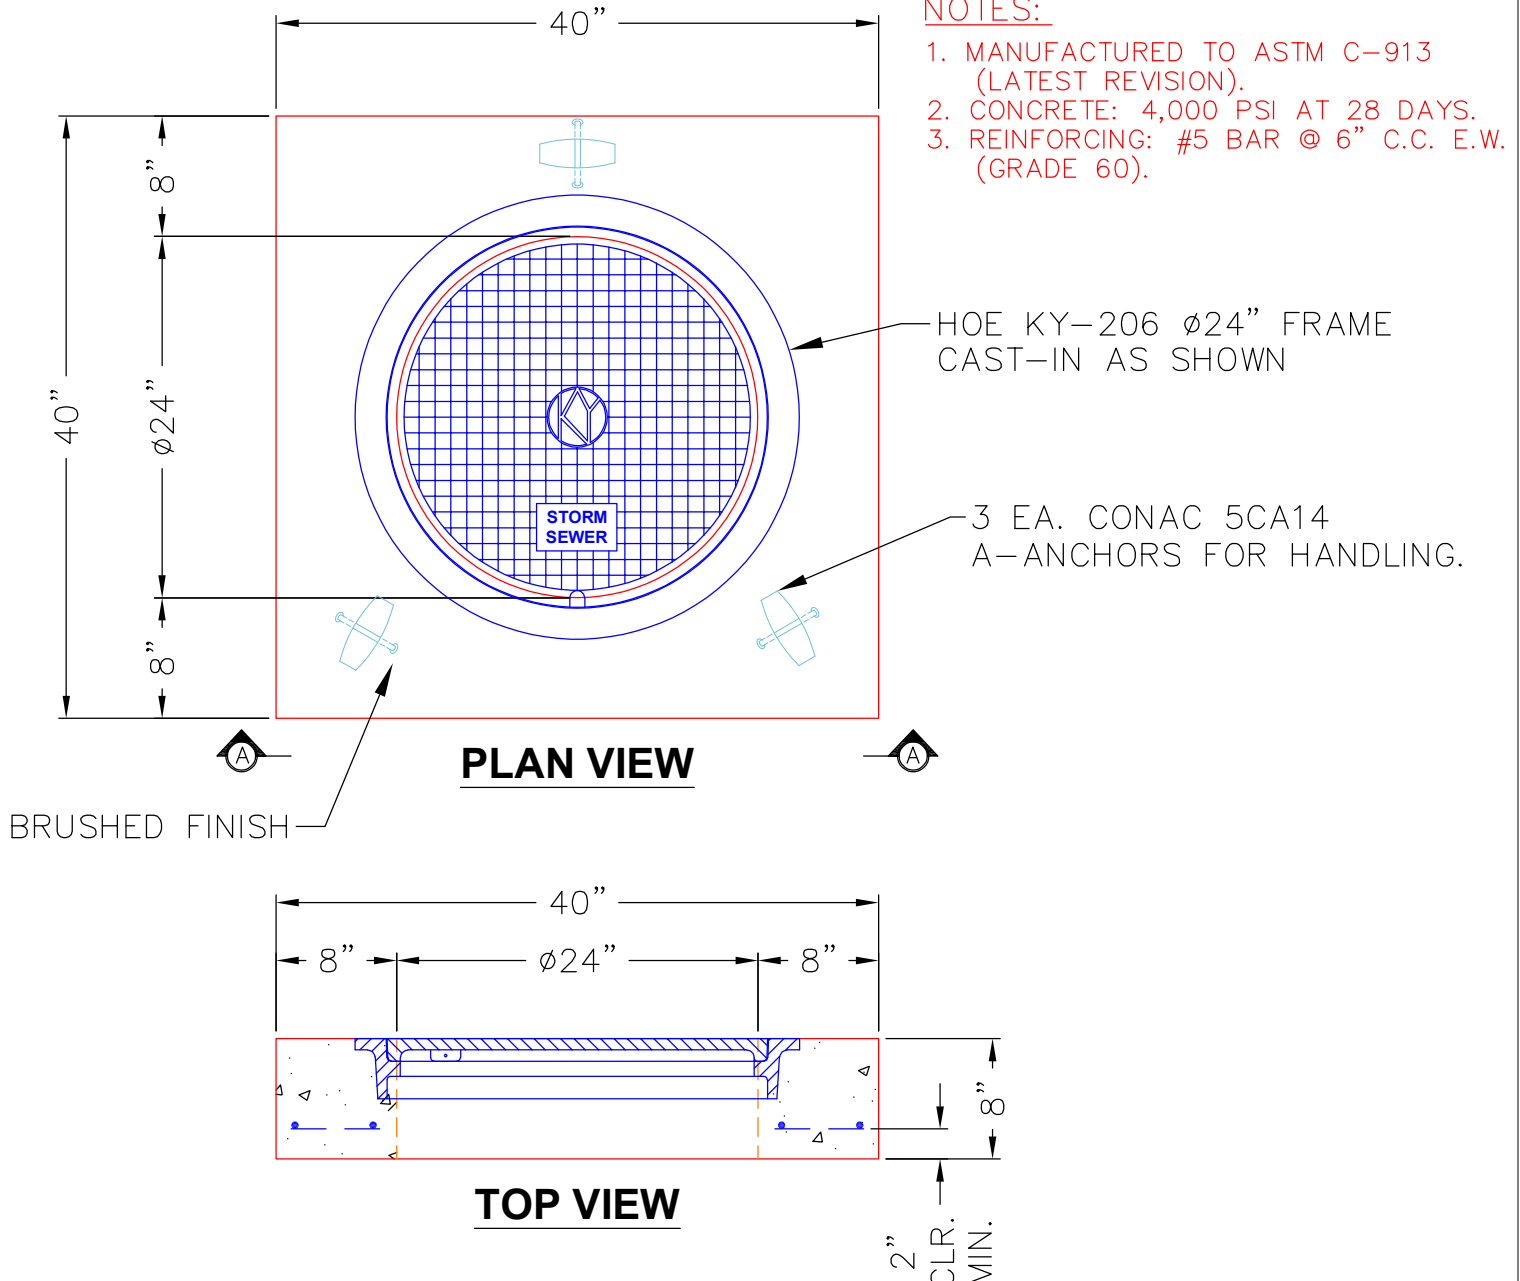

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 770 lb
Volume (Net): 0.2cu.yd