



THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

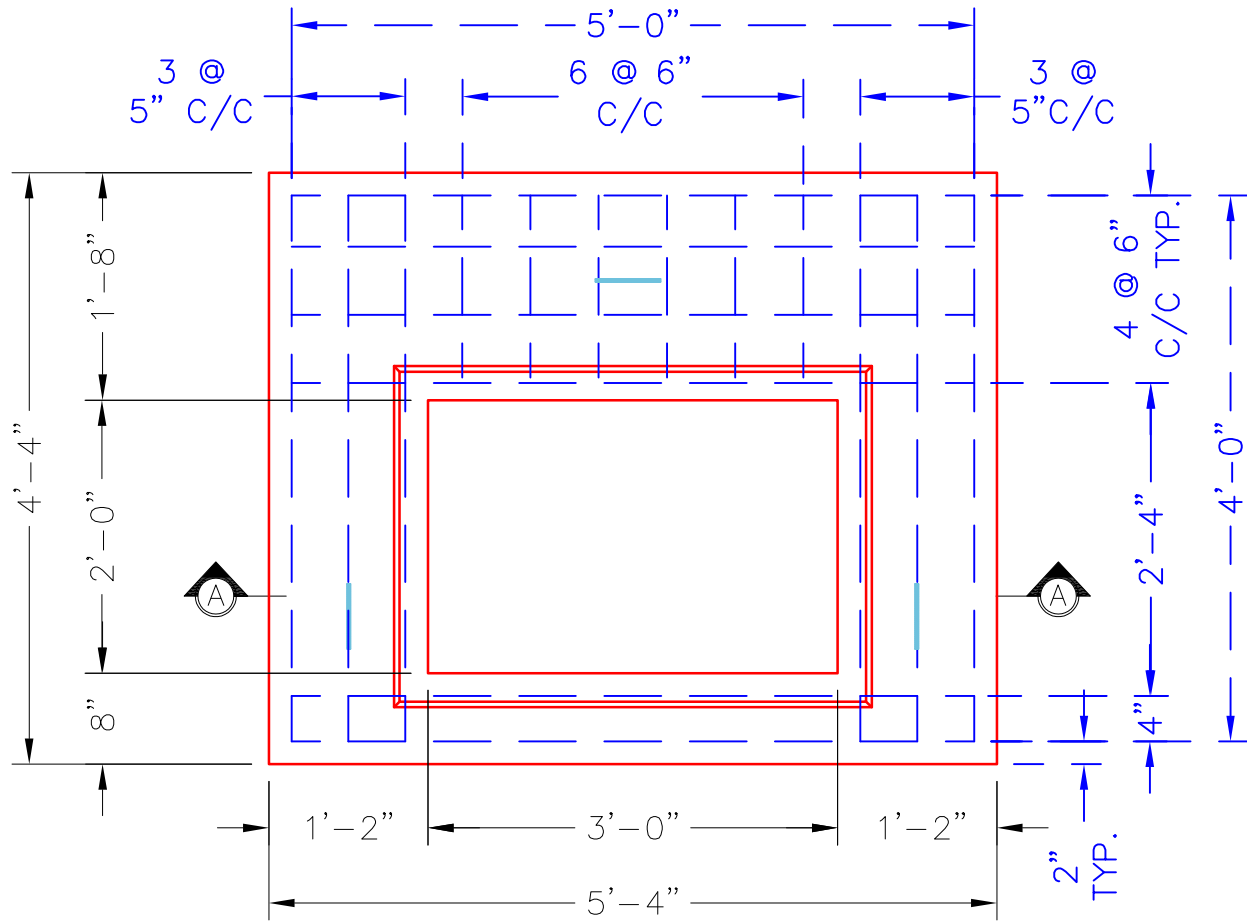

PLAN VIEW

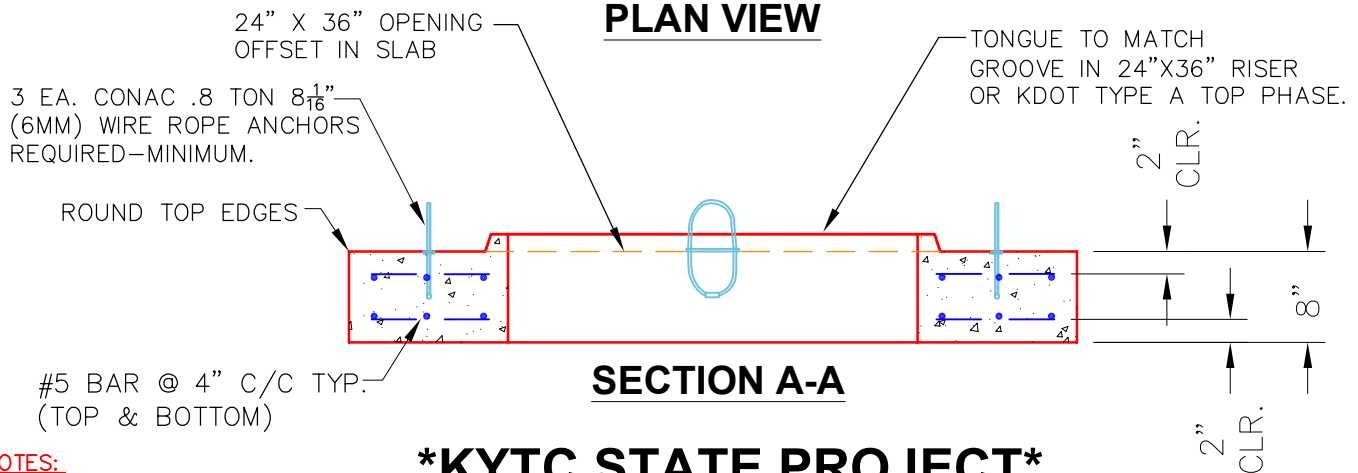

NOTES:

KYTC STATE PROJECT

- CONCRETE: 4500 PSI @ 28 DAYS.
- MANUFACTURED TO KYTC & ASTM C-913 SPECIFICATIONS.
- REINFORCING: #5 BAR AS SHOWN-GRADE 60.
(TOP & BOTTOM LAYER)
- 3 EA. CONAC WIRE LOOP LIFTS REQUIRED (MIN.)

#5 BAR CUT LIST
12 EA. @ 60" LG.
12 EA. @ 48" LG.
12 EA. @ 16" LG.

PRODUCTION WORK ORDER		PRODUCT I.D.:	DESCRIPTION:
		BX036048-08TS024036	CURB INLET TRANSITION SLAB 36" X 48" X 8"
	QUALITY CONTROL CHECKLIST		CUSTOMER: SCOTTY'S CONTRACTING & STONE LLC
	☐ ALL DIMENSIONS CORRECT.		PROJECT: KYTC CHRISTIAN CO. CALL 100 (ID 241018)
	☐ LIFTERS INSTALLED.		STRUCTURE: 257 (431+95 LT) (SEC. P2)
	☐ OPENING OFFSET.		QUOTE/ORDER NO: 24-4208
	☐ REINFORCING CORRECT.		PC: C. GOFF
	☐ SHIP-LAP TONGUE INSTALLED.		DRAWING: S. FELLETER
☐ EDGES CHAMFERED.		DATE: 07/30/26	SCALE: NTS
☐ ANY PATCHWORK ACCEPTABLE.		QC CHECK INITIALS:	PG. 1 of 1