

**Structure ID: CBI B**

**P1 MH048BAVF**

**MH BASE Custom Ht F/n**

- |   |   |   |
|---|---|---|
| P3) 24" x 36" - CASTING HEIGHT - 6.5"<br>P2) 48" - MH FLAT TOP w/24"x36" Hole F/F - 7"<br>P1) 48" - MH BASE Custom Ht F/n - 40"<br>1) 48" - Conseal CS-102 1.00"<br>1) 24" x 36" - Conseal CS-102 1.00"<br>2) Hole - 32<br>1) Hole - 20<br>3) MH Step ML-10-TDS-NCR - 10" | 0 lb<br>1044 lb<br>3263 lb<br>0 lb<br>0 lb<br>0 lb<br>0 lb<br>0 lb<br>0 lb<br>4307 lb | <b>Structure Notes:</b><br>1. PER ASTM C-478 SPECIFICATIONS<br>2. CONCRETE: 4,000 PSI AT 28 DAYS<br>3. REINFORCEMENT: PER ASTM A615<br>4. NO STORM INVERT<br>5. STEPS AT 89 DEGREES<br>6. JBS 3080 FRAME, GRATE, & CURB HOOD SUPPLIED BY OTHERS |
|---|---|---|



Structure Total: 4307 lb

Rim: 523.54' Rim to Invert: 4.36' Slack: 0.77" Sump: 1.95" Step Position: 89°


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	519.18'	0°	0"	24" HP STORM	28"	Hole 32	32"	35.027"	0"	0"
Invert 2	519.18'	178°	90.094"	24" HP STORM	28"	Hole 32	32"	35.027"	0"	0"
Invert 3	519.18'	260°	131.598"	15" HP STORM	17.7"	Hole 20	20"	20.629"	0.65"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

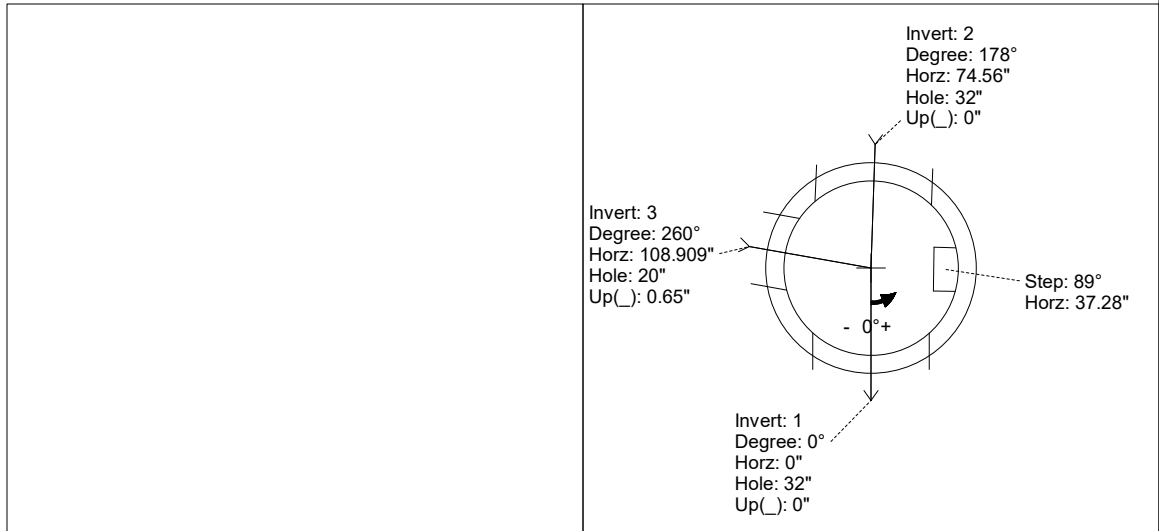

INSIDE WALL DIMENSIONS

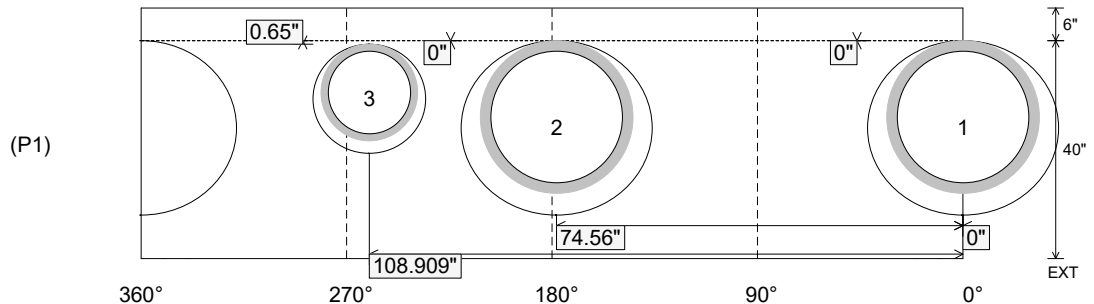

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 40" Height (Ext): 46"	Weight (Net): 3263 lb Volume (Net): 0.83cu.yd
----------------------------------	-------------------------------	--	--	--