



**PLAN VIEW**

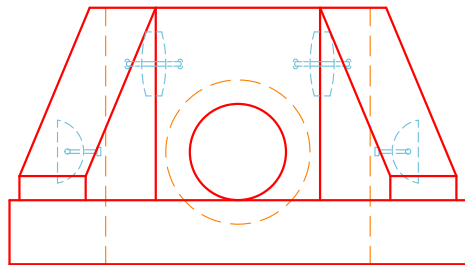

**FRONT VIEW**

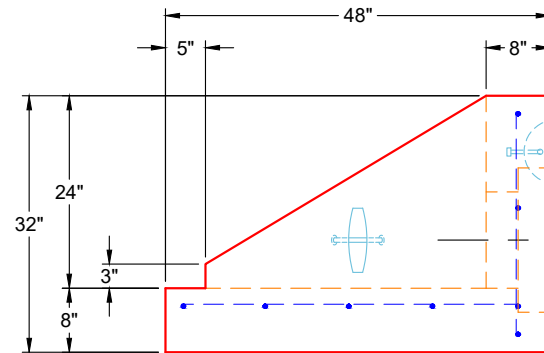

**SIDE VIEW**

**GENERAL NOTES:**

1. CONCRETE: 4,500 PSI AT 28 DAYS
2. REINFORCING: #4 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
3. 3/4" CHAMFER ON ALL EXPOSED EDGES
4. WEIGHT: 2,545 LBS

4 EA. 4CA14 CONAC A-ANCHORS FOR PLANT & FIELD HANDLING

Ø18" OPENING STEPPED DOWN TO Ø12" OPENING FOR 12" HDPE

**PRODUCTION WORK ORDER**

PRODUCT I.D.: HWSF12F

DESCRIPTION: 12" SLOPED & FLARED HW W/ FLAT BOTTOM



**QUALITY CONTROL CHECKLIST**

- ALL DIMENSIONS CORRECT.
- LIFTERS INSTALLED.
- OPENING CENTERED.
- REINFORCING CORRECT.
- SURFACE QUALITY ACCEPTABLE.
- EDGES CHAMFERED.
- ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP

CUSTOMER: SCOTT & RITTER

PLANT: BEAVER DAM, KY

PROJECT: THE PROFESSIONAL PARK LOTS 5 & 6

WEIGHT: 2,545 LBS

STRUCTURE: ST A1

TOP SECTION JOINT: N / A

ORDER NO: 25-4268

BASE SECTION JOINT: N / A

PE: J.H. ROSS

DRAWING: K. CARDWELL

QC CHECK INITIALS:

DATE: 10/28/25

SCALE: NTS

PG. 1 OF 1