


PRINT IN COLOR FOR ADDITIONAL CLARITY

#5 BAR DIAGONALS  
TOP & BOTTOM  
(8 EA. @ 24" &  
8 EA. @ 34")

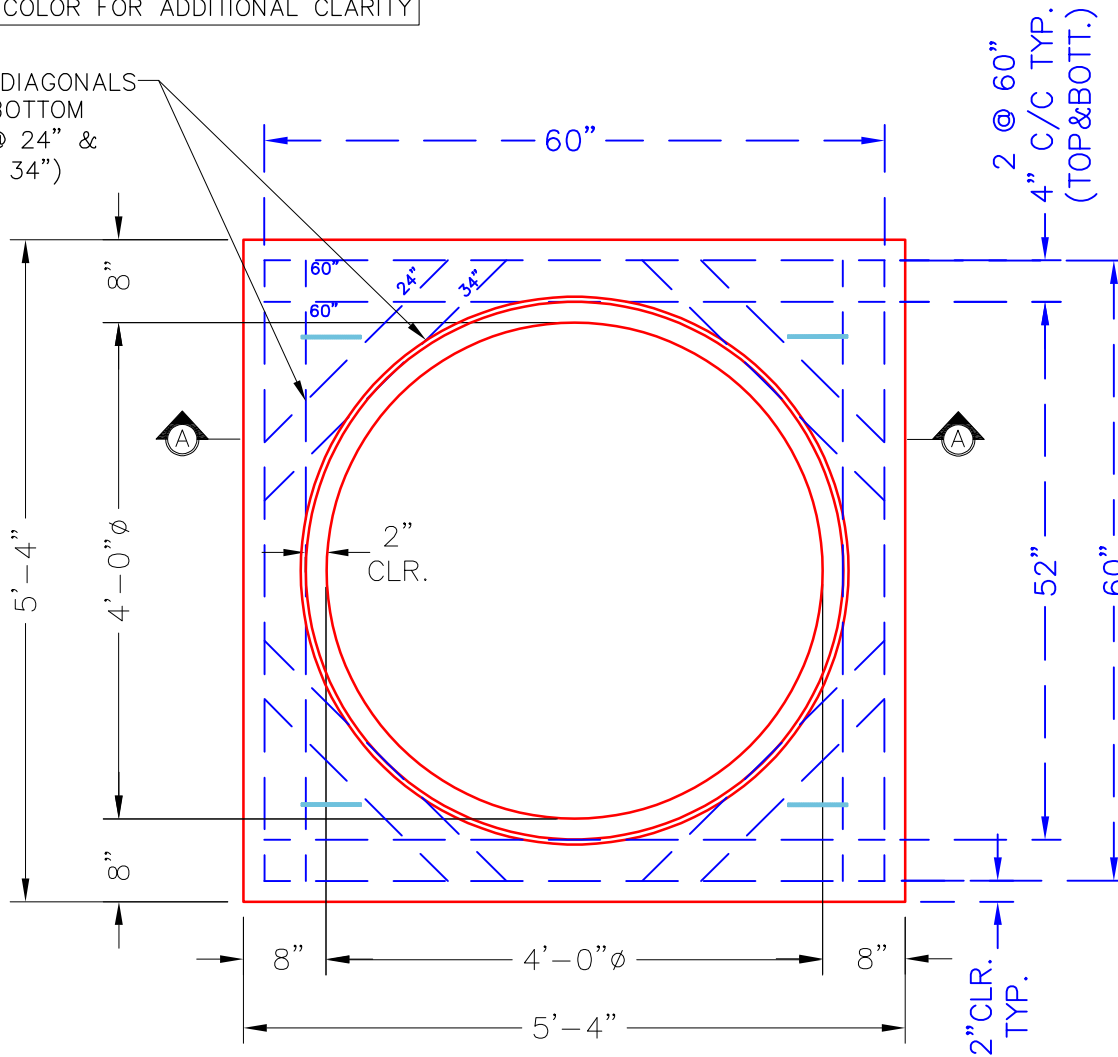


**PLAN VIEW**

4 EA. CONAC .8 TON  $8\frac{1}{16}$ "  
(6MM) WIRE ROPE ANCHORS  
REQUIRED—MINIMUM.

48"Ø OPENING WITH TONGUE  
FOR 48"Ø COMPONENTS.

#5 BAR @ 4"  
C/C TYPICAL.  
(TOP & BOTTOM)

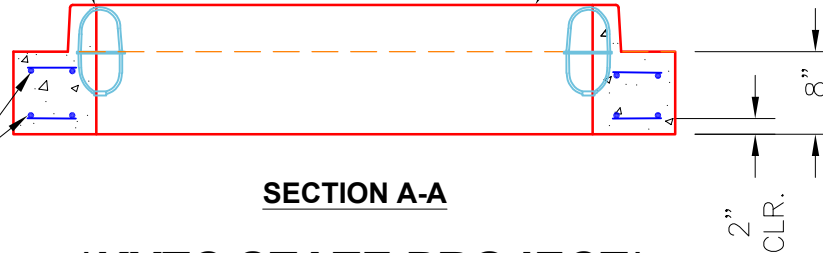

**SECTION A-A**

**NOTES:**

- CONCRETE: 4500 PSI @ 28 DAYS.
- REINFORCING: #5 BAR @ 4" C/C-GRADE 60.  
(TOP & BOTTOM LAYERS).
- KYTC CERTIFICATIONS REQUIRED.
- 4 EA. CONAC WIRE LOOP LIFTERS REQUIRED.

**\*KYTC STATE PROJECT\***

#5 BAR CUT LIST  
16 EA. @ 60" LG.  
8 EA. @ 34" LG.  
8 EA. @ 24" LG.

**PRODUCTION WORK ORDER**

PRODUCT I.D.:  
BX4848\_08TS8

DESCRIPTION:  
CB TRANSITION SLAB 48"X48" TO 48"Ø



**QUALITY CONTROL CHECKLIST**

- ☐ ALL DIMENSIONS CORRECT.
- ☐ LIFTERS INSTALLED.
- ☐ OPENING CENTERED.
- ☐ REINFORCING CORRECT.
- ☐ SURFACE QUALITY ACCEPTABLE.
- ☐ EDGES CHAMFERED.
- ☐ ALL PATCHWORK ACCEPTABLE.

PRODUCT VIEW: RIGHT SIDE UP

PLANT: BEAVER DAM, KY.

WEIGHT: 1,535 LBS.

TOP SECTION JOINT: TONGUE

BASE SECTION JOINT: FLAT

QC CHECK INITIALS:

CUSTOMER: SCOTTY'S CONTRACTING & STONE LLC

PROJECT: KYTC CHRISTIAN CO. CALL 100 (ID 241018)

STRUCTURE ID.: 267 (435+52 RT) (SEC. P2)

QUOTE/ORDER NO: 24-4208

PC: C. GOFF

DATE: 07/30/26

DRAWING: S. FELLETER

SCALE: NTS PG. 1 of 1