



THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

GENERAL NOTES:


1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE 5,000 PSI AT 28 DAYS.
3. REINFORCING: #4 @ 9" O.C. E.W. (GRADE 60) WITH ADDITIONAL #4 BAR AROUND OPENING.

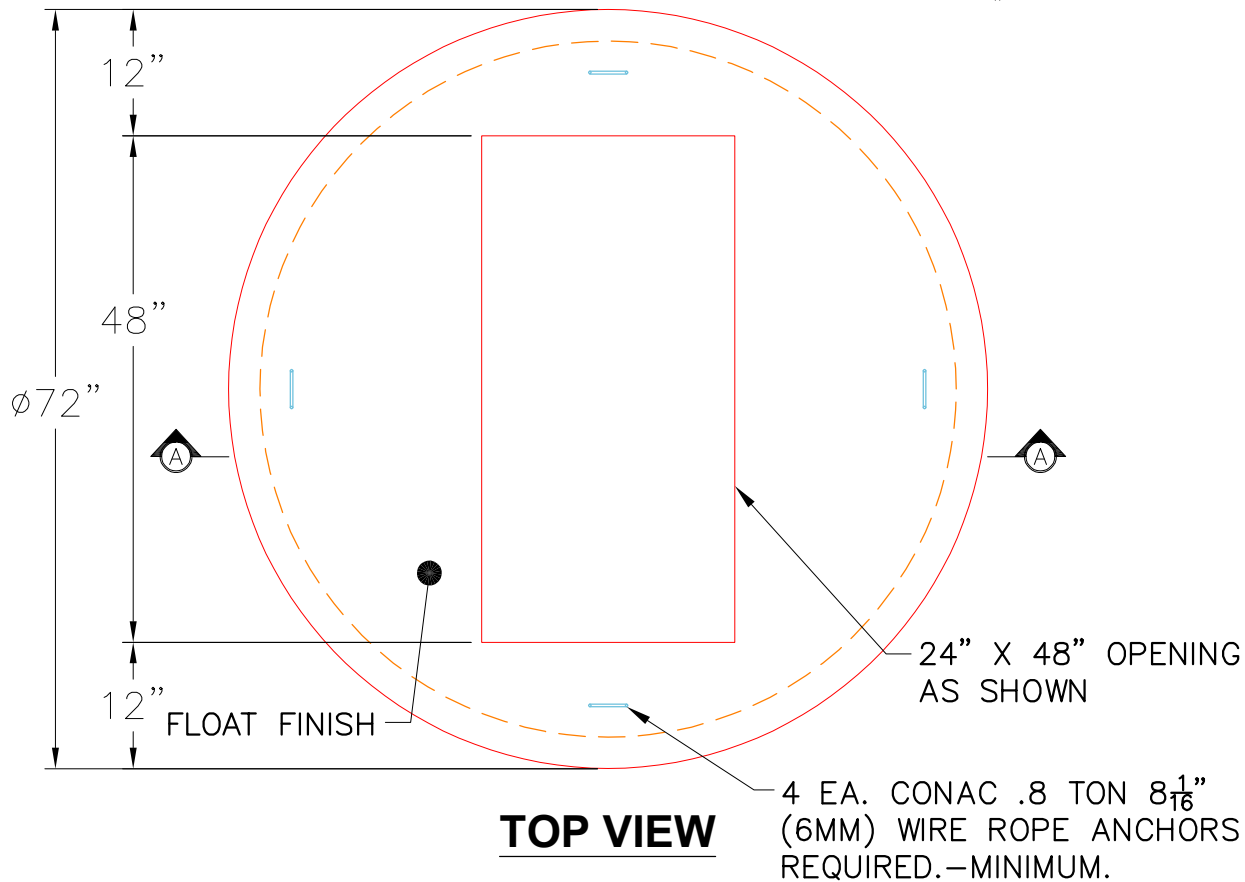

4 EA. CONAC .8 TON 8¹/₈" (6MM) WIRE ROPE ANCHORS REQUIRED.—MINIMUM.

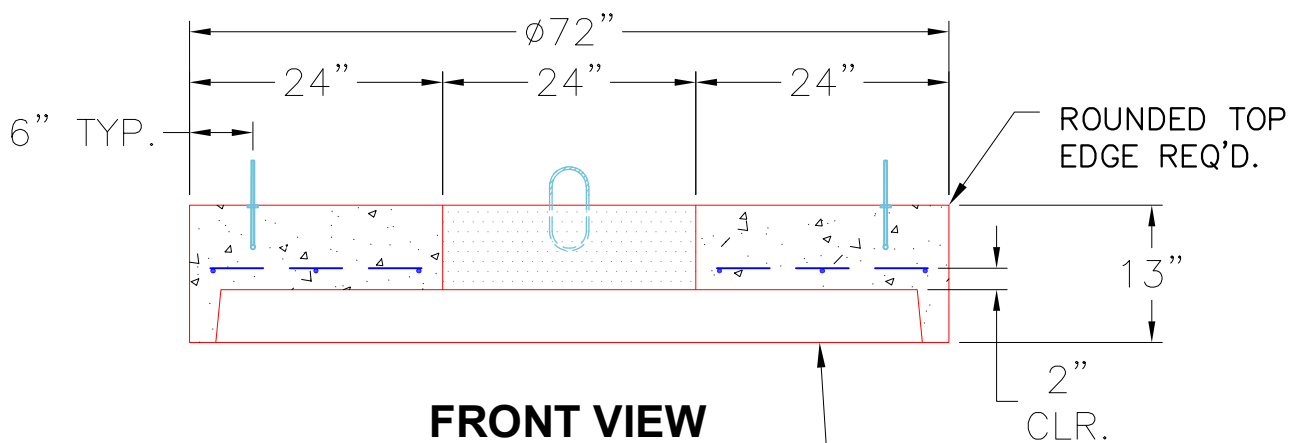

STANDARD SINGLE OFFSET GROOVE JOINT REQUIRED.

<p>PRODUCTION WORK ORDER</p>	<p>PRODUCT I.D.: MH060LD13SP</p>	<p>DESCRIPTION: 60"ø X 13" MH TOP SLAB 24"X 48" OPENING LOUMSD</p>	
	<p>QUALITY CONTROL CHECKLIST</p> <ul style="list-style-type: none"> <input type="checkbox"/> ALL DIMENSIONS CORRECT. <input type="checkbox"/> LIFTERS INSTALLED. <input type="checkbox"/> HOLE LOCATION CORRECT. <input type="checkbox"/> REINFORCING CORRECT. <input type="checkbox"/> FINISH ON SLAB SURFACE UNIFORM. <input type="checkbox"/> OUTSIDE TOP EDGE TROWELLED. <input type="checkbox"/> GROOVE JOINT INSTALLED. 	<p>PRODUCT VIEW: RIGHT SIDE UP</p> <p>PLANT: BEAVER DAM, KY.</p> <p>WEIGHT: 2,272 LBS.</p> <p>TOP SECTION JOINT: N/A</p> <p>BASE SECTION JOINT: GROOVE</p> <p>QC CHECK INITIALS:</p>	<p>CUSTOMER: BOWEN ENGINEERING CORPORATION</p> <p>PROJECT: CHESTNUT STREET UTILITY REHAB</p> <p>STRUCTURE: 102</p> <p>QUOTE/SALES ORDER NO: 25-4272</p> <p>PC: A. CHAMBERS DRAWING: J. COPPAGE</p> <p>DATE: 10/23/25 SCALE: NTS PG. 1 of 1</p>