

**Structure ID: 104**

**P1 BX2436-08BA48**

**BOX BASE 8inW, 8inF**

- P2) 24" x 36" - CASTING HEIGHT - 6"
- P1) 24" x 36" - BOX BASE 8inW, 8inF - 48"
- 1) CASTING - HOE 525 LV SET (F/G/H)
- 1) 24" x 36" - SGL 1"x14.5' Butyl
- 1) Hole - 20

0 lb
6026 lb
442 lb
0 lb
0 lb
-----
Structure Total: 6468 lb




- Structure Notes:
1. JR HOE HOE-525-LV PROVIDED BY ICAST.
  2. PER ASTM C913 SPECIFICATIONS.
  3. CONCRETE = 4,000 PSI AT 28 DAYS.
  4. REINFORCING PER ASTM A615 (GRADE 60).
    - WALLS (As .12) #5 BARS AT 12" C.C.E.W.
    - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

Rim: 379.47'    Rim to Invert: 4.62'    Slack: 3.44"    Sump: 2"    Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	374.85'	52°	20.526"	12" RCP B WALL	16"	Hole 20	20"	25.38"	0"	8"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

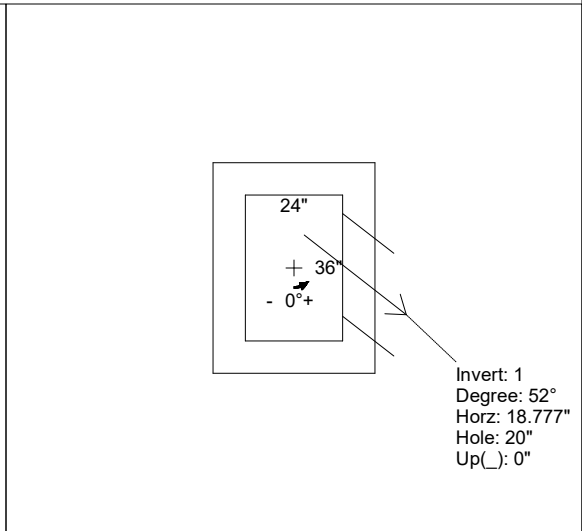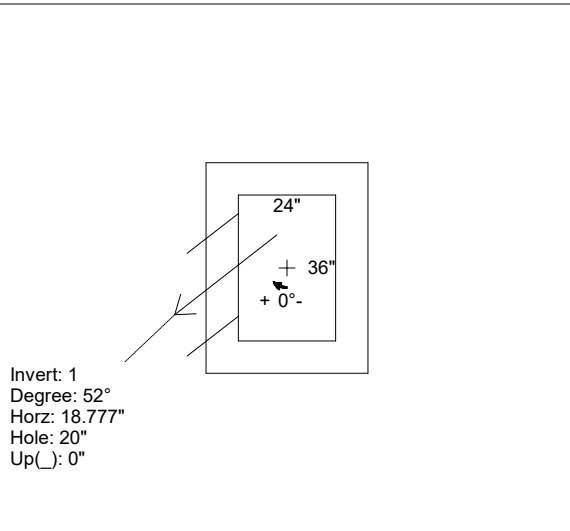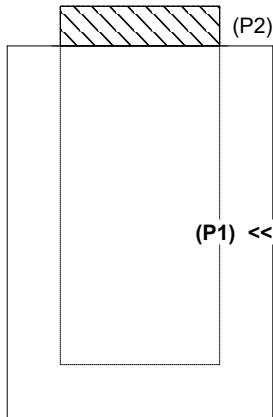

INSIDE WALL DIMENSIONS

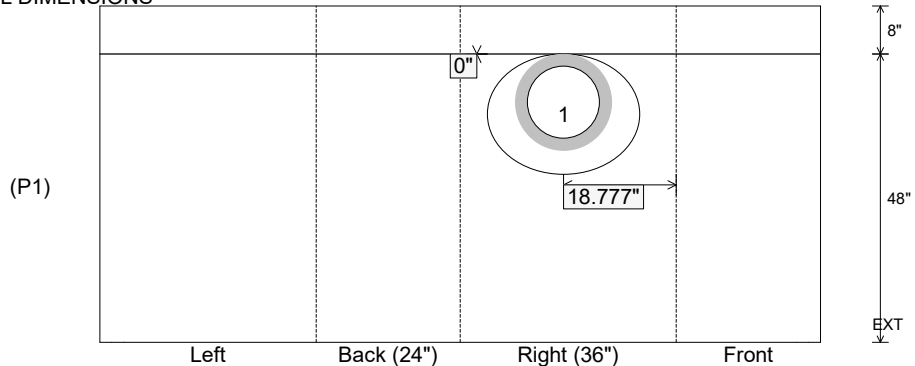

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 48" Height (Ext): 56"	Weight (Net): 6026 lb Volume (Net): 1.54cu.yd
----------------------------------	-------------------------------	--	--	--