


Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018) Job Location: Hopkinsville, KY Contractor: Scotty's Contracting & Stone, LLC				Plant: Beaver Dam 7/30/2026 8:59:20 AM		Tech: J. Horsley PC: C. Goff					
Structure ID: 272 (437+45 RT)											
P3 BX2436-08R36				BOX RISER 8inW T/G							
P7) 24" x 120" - CB INLET KY A 10' TOP LEFT F/G - 10" P6) 24" x 120" - CB INLET KY A 10' BOTTOM LEFT T/G - 18" P5) 24" x 36" - FIELD ADJUSTMENT - 3.5" P4) 24" x 36" - BOX RISER 8inW F/G - 36" P3) 24" x 36" - BOX RISER 8inW T/G - 36" P2) 36" x 48" - CB FT REDUCER 24"X36" HOLE T/F - 8" P1) 36" x 48" - BOX BASE 8inW, 8inF, Variable Ht F/n - 58" 1) CASTING - HOE KY-206 F/C (KY TY1) 1) 36" x 48" - Conseal CS-102 1.00" 3) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 44 1) Hole - 20 1) Hole - 22 1) Hole - 6						3400 lb 5270 lb 0 lb 3188 lb 3673 lb 1654 lb 7980 lb 206 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 25371 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. HOE KY-206 F/C CAST INTO TOP SLAB. REINFORCING PER ASTM A615 (GRADE 60). - TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W. - TRANS. SLAB (As .62) #5 BARS AT 6" C.C.E.W (DBL MAT) - WALLS (As .31) #5 BARS AT 6" C.C.E.W. - FLOOR (As .31) #5 BARS AT 6" C.C.E.W.			
Rim: 546.02'				Rim to Invert: 14.15'		Slack: 0.3"		Sump: 0"		Step Position:	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset	
Invert 1											
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

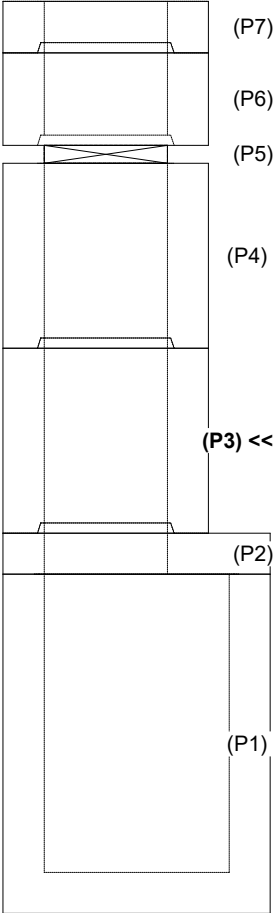

(P7)

(P6)

(P5)


(P4)

(P3) <<


(P2)

(P1)

RIGHT-SIDE UP VIEW (int. dimensions)



INSIDE WALL DIMENSIONS

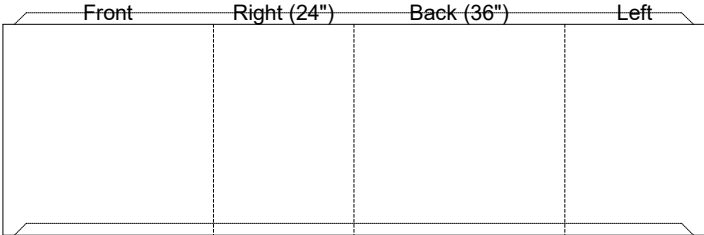

(P3)

EXT 36"

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 36" Height (Ext): 36"	Weight (Net): 3673 lb Volume (Net): 0.94cu.yd
----------------------------------	------------------------------------	--	--	--