




MH RISER w/XYPEX


Structure Notes:

1. PER ASTM C-478 SPECIFICATIONS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: PER ASTM A615
4. INVERT CHANNEL REQUIRED
5. STEPS AT 0 DEGREES
6. JBS 1150 FRAME & COVER "SANITARY" SUPPLIED BY ICAST

Rim: 724.62' Rim to Invert: 20.6' Slack: 2.2" Sump: 2" Step Position: 0°

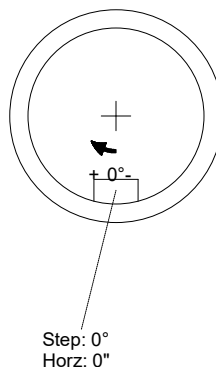[illegible]

INSIDE WALL DIMENSIONS

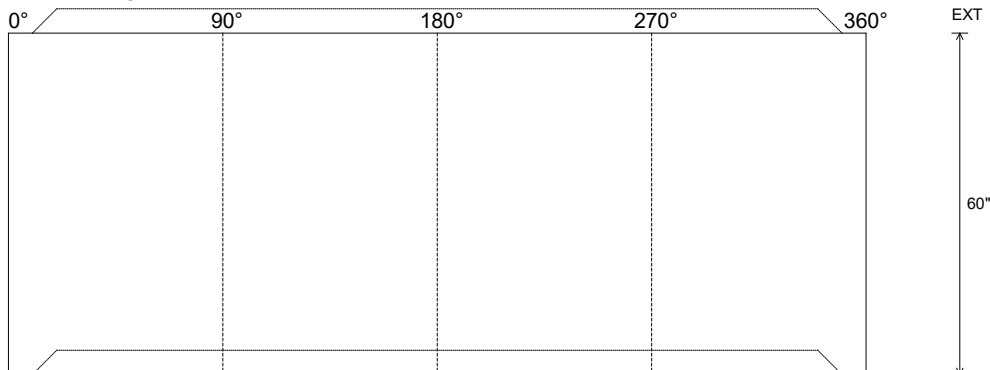

Weight (Net): 4192 lb
Volume (Net): 1.07cu.yd