

Job Name: 24-4208 - KYTC Christian Co. Call 100 (ID 241018)

Job Location: Hopkinsville, KY

Contractor: Scotty's Contracting & Stone, LLC

Plant: Beaver Dam

8/3/2026 4:20:50 PM

Tech: J. Horsley

PC: C. Goff



Structure ID: 282 (443+60 LT)

P1 BX2436-08BVF

BOX BASE 8inW, 8inF, Variable Ht F/n

P4) 24" x 120" - CB INLET KY A 10' TOP RIGHT F/G - 10"

P3) 24" x 120" - CB INLET KY A 10' BOTTOM RIGHT T/G - 18"

P2) 24" x 36" - FIELD ADJUSTMENT - 4"

P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 25"

1) CASTING - HOE KY-206 F/C (KY TY1)

2) 24" x 36" - Conseal CS-102 1.00"

1) Hole - 22

1) Hole - 6

3398 lb

5270 lb

0 lb

3673 lb

206 lb

0 lb

0 lb

0 lb

Structure Total: 12547 lb

Structure Notes:

** KYTC STATE PROJECT **

1. PER KYTC CBI TYPE A / ASTM C913 SPEC'S.

2. CONCRETE = 4,000 PSI AT 28 DAYS.

3. HOE KY-206 F/C CAST INTO TOP SLAB.

.

REINFORCING PER ASTM A615 (GRADE 60).

- TOP PHASE (As .62) #5 BARS AT 6" C.C.E.W.

- WALLS (As .31) #5 BARS AT 12" C.C.E.W.

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 529.7'

Rim to Invert: 4.75'

Slack: 0"


Sump: 0"


Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	524.95'	270°	26"	15" RCP B WALL	19.5"	Hole 22	22"	22"	-2.25"	0"
Invert 2	526.23'	0°	20"	4" HDPE (perf pipe)	4.8"	Hole 6	6"	6"	14.96"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimenions)

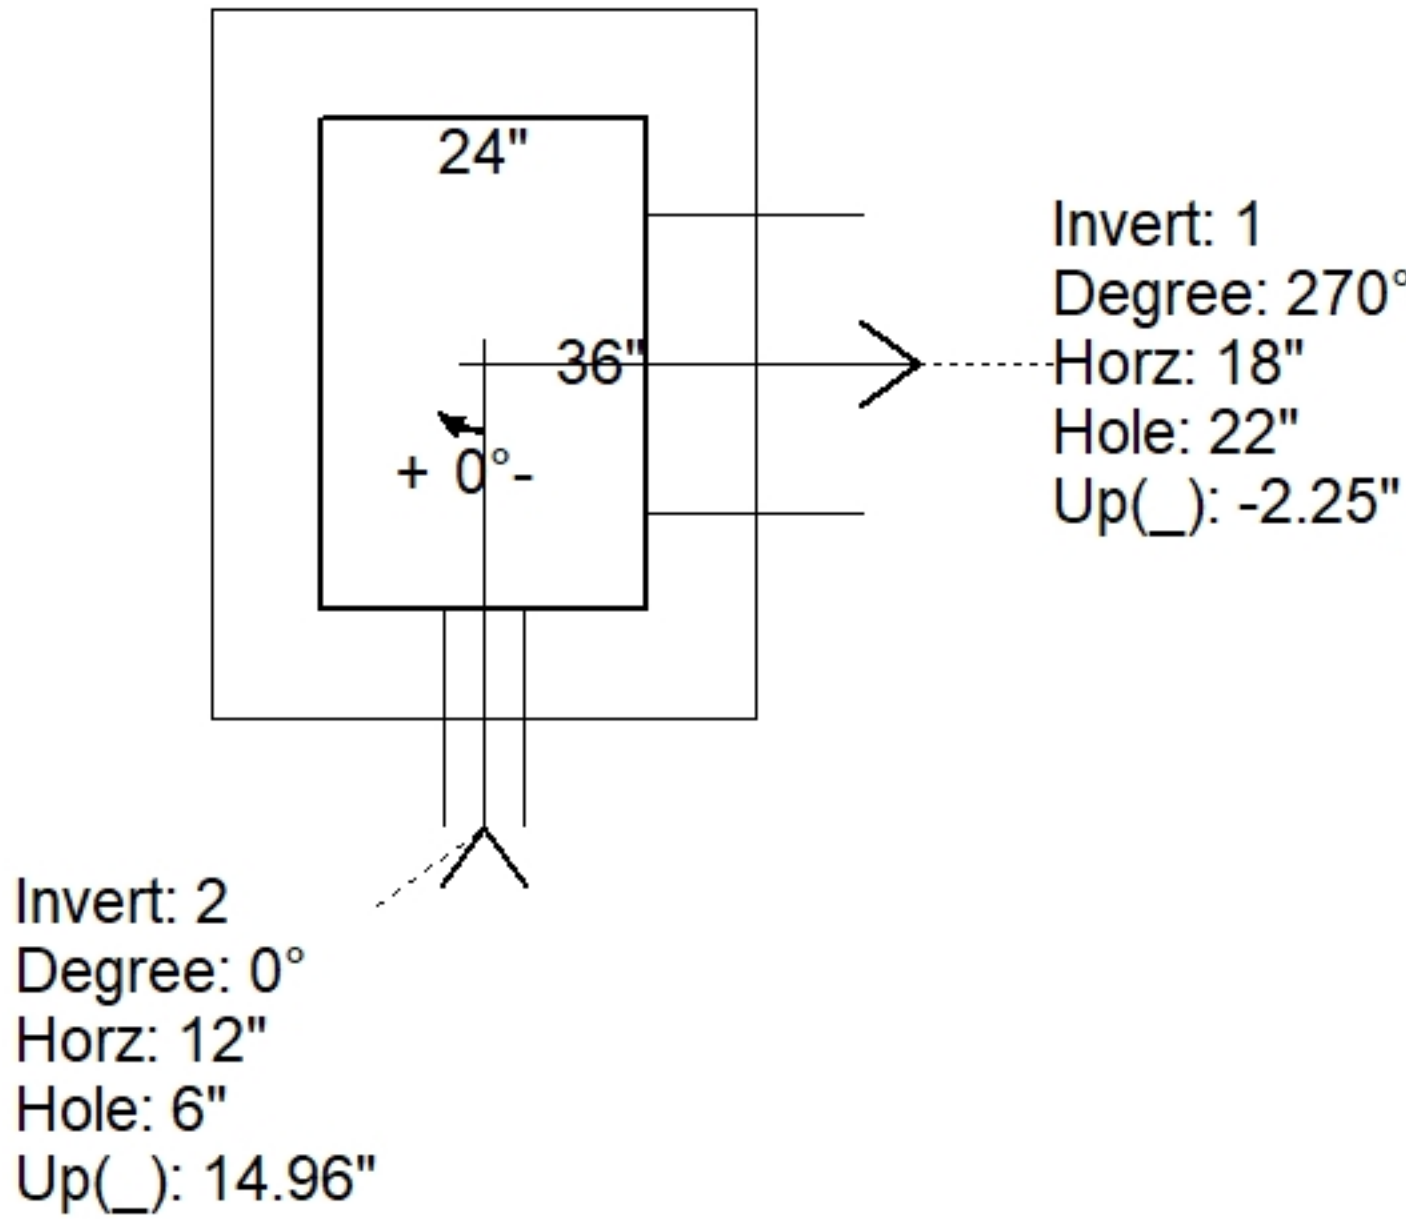

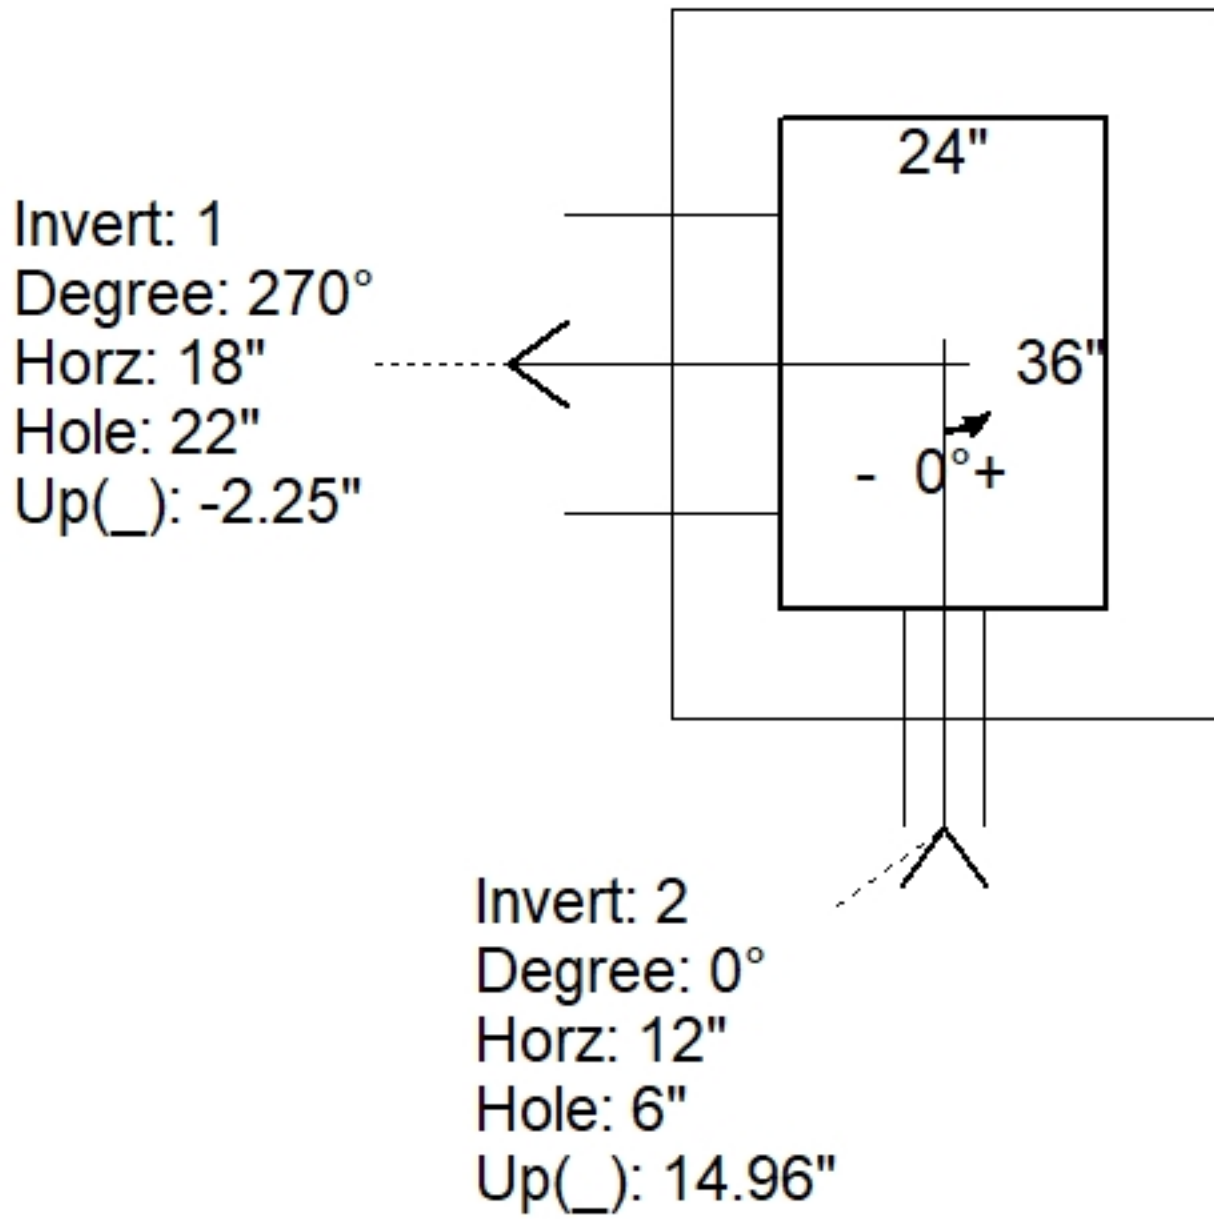

INSIDE WALL DIMENSIONS

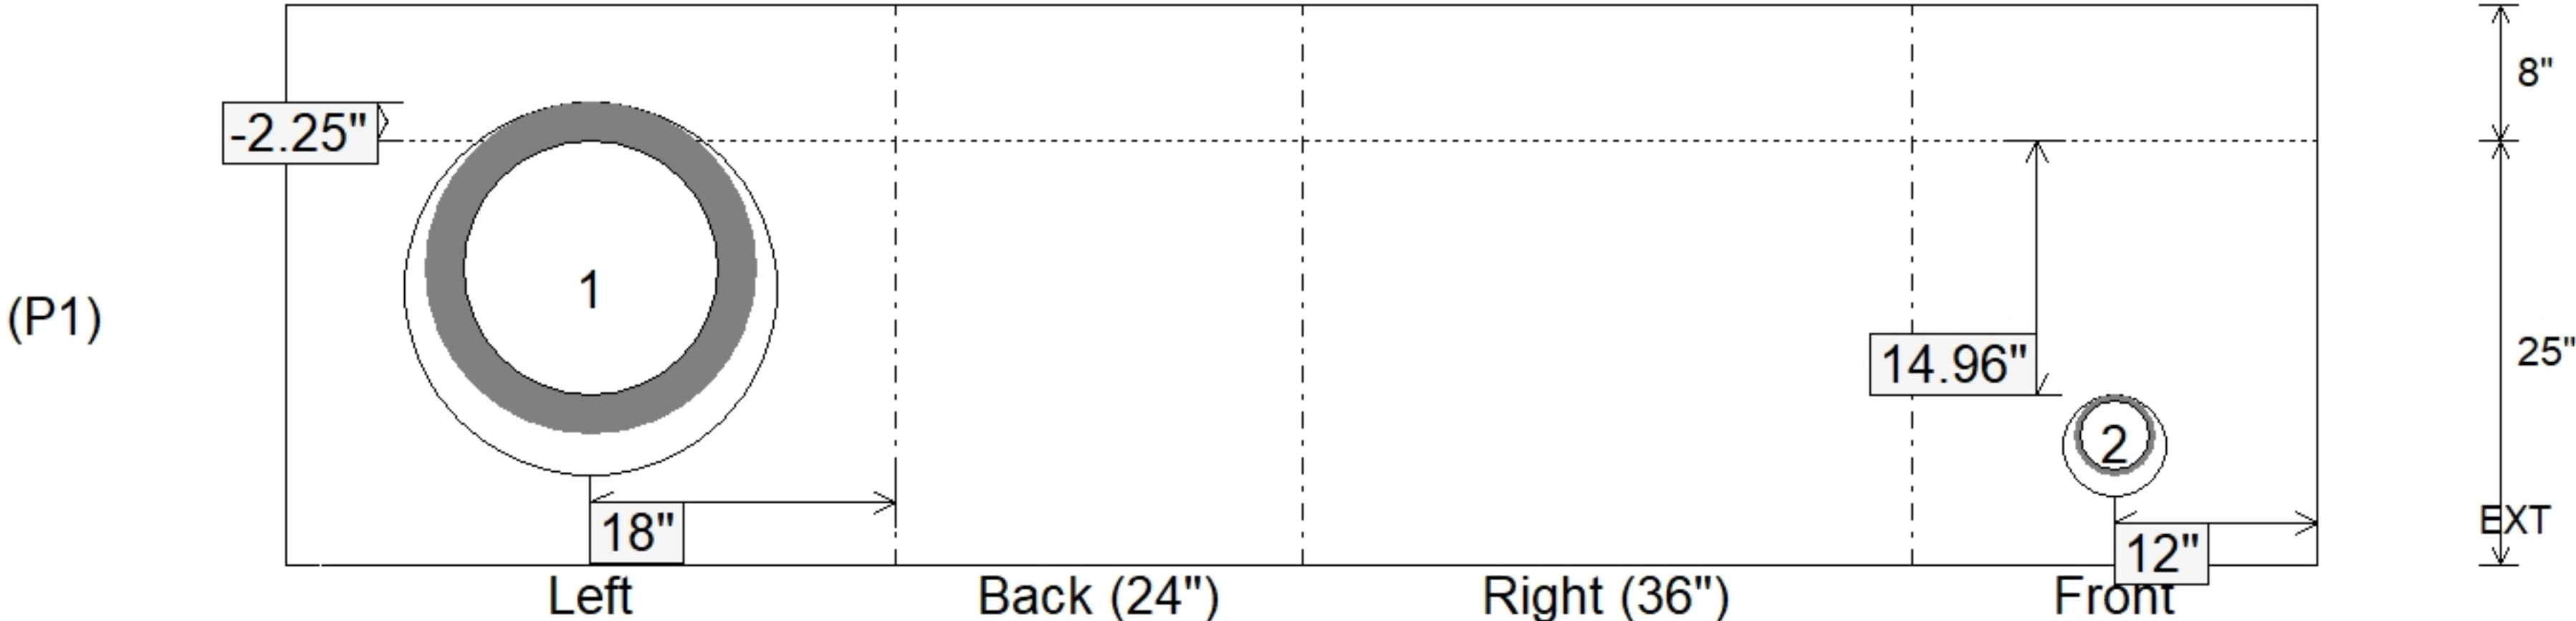

Coating (Int):

Coating (Ext):

Seam Up: Flat

Seam Dn: n/a

Wall Thickness: 8"

Floor Height: 8"

Height (Int): 25"

Height (Ext): 33"

Weight (Net): 3673 lb

Volume (Net): 0.94cu.yd